

Project:	
Type:	
Catalog # :	

FME Lighting | 877 - 234 - 8460 | info@fmelighting.com



SPECIFICATIONS




VOLTAGE	100-277VAC
WATTAGE	5W (Standard), 3W
LED EXIT SIGN COLORS	Red (Standard), Green
OPERATING TEMP	-40°F to 140°F (-40°C to 60°C)
OPERATING TEMP BATTERY	-4°F to 140°F (-20°C to 60°C)
HOUSING	Die-cast A356T6 Aluminum (Copper-free) Baked-on gray epoxy finish
SIGN PANEL	Tempered Glass (with dual chevrons STD) (consult factory for alternate configurations)
HARDWARE	Stainless Steel
CRI	>70
EMERGENCY MODE	3 Hours
MOUNTING	Wall and pendant mounting standard. 3/4" NPT hubs provided for conduit feed
PROTECTION	IP66 & IK10/IK08
WARRANTY	5 Year Limited Warranty



CERTIFICATIONS

- Class I, Division 1 Groups B, C, D
- Class I, Division 2 Groups A, B, C, D
- Class II, Division 2 Groups F, G
- Class III
- UL844 - Hazardous Locations
- UL924 - Emergency Lighting

DIMENSIONS



WEIGHT: 13.2 lbs (6 kg)

ORDERING INFORMATION

ORDERING GUIDE

Series	Wattage	LED Color	Panel Face	Voltage	Chevrons	Options
ZTP	3 = 3W 5 = 5W (Standard)	RD = Red (Standard) GN = Green	SF = Single Face (Clear) DF = Double Face (White)	LV = 100-277V	DA = Double Arrow LA = Arrow Left RA = Arrow Right RL = Right/Left Arrow Double-faced Only NA = No Arrow	WM = Wall Arm Mount PNT = Pendant Mount CS = Custom Wording



* Mounting options please refer to the accessories at the bottom of page 2

REPLACEMENT PANELS

Series	Panel Face	Chevrons
ZTP	SF = Single Face (Clear) DF = Double Face (White)	DA = Double Arrow LA = Arrow Left RA = Arrow Right RL = Right/Left Arrow Double-faced Only NA = No Arrow


MOUNTING

Surface/Wall mount Bracket STANDARD MOUNT

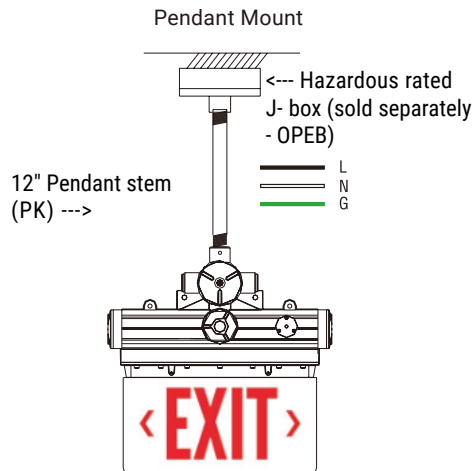


MOUNTING INSTRUCTIONS


Wall Mounting with Arm




1. Tighten the arm to the fixture.



2. Tighten the screw of skid-proof.




3. Drill 2 holes (Ø10mm) for arm.




4. Wiring the cable as white to L, black to N, green to G.


Pendant Mounting




1. Tighten the arm to the fixture.



2. Install the cable through the pole.



3. Drill 2 holes (Ø10mm) for metal wires and tighten the screw of skid-proof.



4. Install the fixture to junction box. Wiring the cable as white to L, black to N, green to G.