

Project:	
Type:	
Catalog #:	




SPECIFICATIONS: OVERVIEW

The RINCON REMOTE is vandal resistant, durable and can be depended on in the event of an emergency. The gasketed die-cast aluminum housing and clear polycarbonate lens is suitable for areas that are wet, cold or that generate dust. Tamper resistant screws are standard and ensure the integrity of the remote. The operating temperature is from -22°F up to 104°F (-30°C to 40°C).

MECHANICAL SPECIFICATIONS

The RINCON REMOTE is constructed from a durable, fully gasketed NEMA 4X and IP66 rated die-cast aluminum housing. Stainless steel mounting straps are supplied for surface mounting. The RINCON REMOTE is supplied standard in a durable gray powder coat, baked finish. Other colors are available, including color matching, please specify. CSA 22.2 No. 141 Performance Certified.

DIMENSIONS (in, mm.)

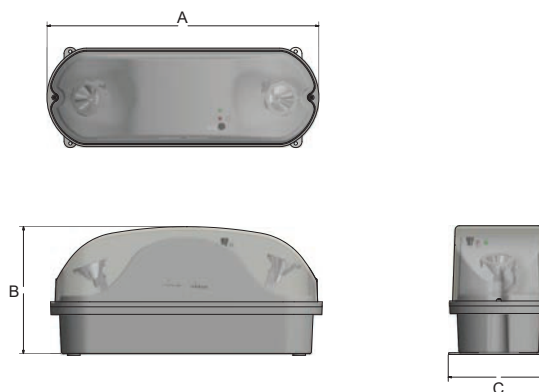

Series	A	B	C
RIN-R	16 1/4"	7 1/2"	6"
	413mm	191mm	152mm

ORDERING LOGIC

Series	Operation	Lamps	Options
RIN-R	6 VDC 12 VDC 24 VDC	See lamp selection on next page	CC (custom color mounting plate) WG (wireguard)

SANITATION LISTING:

The RINCON REMOTE is sanitation listing approved. The Intertek verified splash zone listing is equivalent to the NSF standard 2, meeting the rigorous sanitation, electrical safety and performance standards of food service environments.

TAMPER RESISTANT DESIGN:

The RINCON REMOTE series of vandal resistant emergency lighting units are designed to stand up to abuse in applications such as schools, public areas, institutions and apartment complexes where vandalism may potentially occur. The heavy die-cast aluminum body and polycarbonate lens offer extreme protection and superior performance. Tamper resistant screws are standard and ensure the integrity of the unit.

LAMP SELECTION:

	6V	12V	24V
MR16	6, 10W	10, 12, 20, 35, 50W	12, 20, 35, 50W
MR16 LED	5, 7W	2, 5, 7W	5, 7W

WARRANTY:

The RINCON REMOTE comes with a 3-year factory warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.