

EB3000

Fluorescent Emergency Ballast - 3000 Lumens



Project:	
Type:	
Catalog#:	

HOUSING

- Heavy gauge steel with white powder coat paint
- Operation: When AC power fails, the EB3000 immediately switches to the emergency mode, operating one lamp at a reduced lumen output for a minimum of 90 minutes. When AC power is restored, the emergency ballast automatically returns to the charging mode



ELECTRICAL

- High-temperature nickel-cadmium battery, charger and electronic circuitry
- Dual voltage 120/277 VAC operation
- Short circuit protection
- Solid-state charging indicator light
- Single-pole test switch
- Input Power: 3.5 Watts

INSTALLATION

- For use with either switched or unswitched fixture
- Ballast may be installed inside, on top, or remote from fixture
- Ballast may be remote mounted at 1/2 distance recommended by AC ballast manufacturer (maximum 50')

BATTERY


- Ambient Temperature Rating 32°F - 122°F
- Maintenance-Free Nickel-Cadmium Battery
- Recharge time: 24 hours
- Charging current: 280mA

CODE COMPLIANCE

- UL924 listed for damp locations
- NFPA 101 Life Safety Code compliant
- Meets NEC and OSHA requirements

WARRANTY

- 5 Year warranty

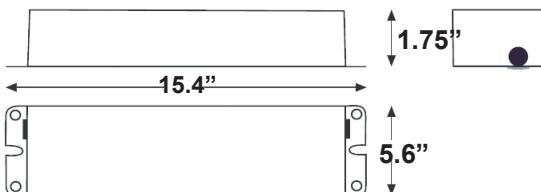

ORDERING INFORMATION

CATALOG

EB3000

LAMP TYPE	WATTAGE
T8 (1L)	17-86
T8 (2L)	17-40
T10 (1L)	40
T10 (2L)	40
T12 (1L)	20-215
T12 (2L)	20-40
4-PIN CFL (1L)	13-42
4-PIN CFL (2L)	13-42
4 PIN LONG CFL (1L)	18-55
4 PIN LONG CFL (2L)	18-50
T9 CIRCLINE (1L)	20-40
T9 CIRCLINE (2L)	20-40
U-BEND (1L) T8	32
U-BEND (2L) T8	32
U-BEND (1L) T12	34-40
U-BEND (2L) T12	34-40

LAMP	INITIAL LUMENS	
	1 LAMP	2 LAMP
T8 (17W)	1100	1150
T8 (32W)	2950	3000
T8 (59W)	2800	-
T12 (20W)	875	900
T12 (40W)	2250	2400
T12 (110W)	2950	-
T12 (215W)	3000	-
4-Pin CFL 13W	825	900
4-Pin CFL 18W	1100	1200
4-Pin CFL 26W	1500	1600
4-Pin CFL 32W	2200	2300
4-Pin CFL 42W	2450	2500
4-Pin Long CFL 18W	1250	1400
4-Pin Long CFL 24W	1750	1900
4-Pin Long CFL 36W	2200	2300
4-Pin Long CFL 40W	2350	2400
4-Pin Long CFL 50W	2250	2400
4-Pin Long CFL 55W	2500	-