

EB750CF-4

Fluorescent 4-Pin Emergency Ballast - 750 Lumens



Project:	
Type:	
Catalog#:	

HOUSING

- Heavy gauge steel with white powder coat paint
- Provided with 2' flex conduit on both ends
- Operation: When AC power fails, the EB750CF-4 immediately switches to the emergency mode, operating one lamp at a reduced lumen output for a minimum of 90 minutes. When AC power is restored, the emergency ballast automatically returns to the charging mode

ELECTRICAL

- High-temperature nickel-cadmium battery, charger and electronic circuitry
- Dual voltage 120/277 VAC operation
- Short circuit protection
- Solid-state charging indicator light
- Single-pole test switch
- Input Power: 1.8W

INSTALLATION

- For use with either switched or unswitched fixture
- Ballast may be installed inside, on top, or remote from fixture
- Ballast may be remote mounted at 1/2 distance recommended by AC ballast manufacturer (maximum 50')

BATTERY


- Ambient Temperature Rating 32°F
- 122°F - Maintenance-Free Nickel-Cadmium Battery
- Recharge time: 24 hours
- Charging current: 280mA
- Capacity: 9.6WH

CODE COMPLIANCE

- UL924 listed for damp locations
- NFPA 101 Life Safety Code compliant
- Meets NEC and OSHA requirements

WARRANTY

- 5 Year warranty

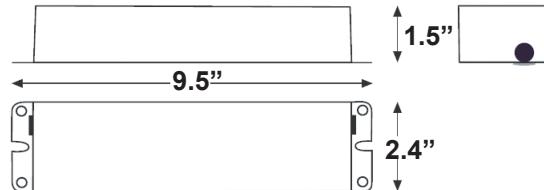

LAMP	INITIAL LUMENS
	1-LAMP
T8 (32W)	675
T12 (40W)	650
4-Pin CFL (13W)	450
4-Pin CFL (18W)	500
4-Pin CFL (26W)	575
4-Pin CFL (32W)	675
4-Pin CFL (42W)	750
4-Pin Long CFL (18W)	525
4-Pin Long CFL (24W)	575
4-Pin Long CFL (36W)	600
4-Pin Long CFL (40W)	650

ORDERING INFORMATION

CATALOG

EB750CF-4