

|            |  |
|------------|--|
| Project:   |  |
| Type:      |  |
| Catalog #: |  |



### STANDARD



### OPTIONAL



### ILLUMINATION

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, 0.5 watt white LED per lamp head.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

### ELECTRICAL

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- EZ-snap thermoplastic mounting canopy included – provides top or end mount.
- Universal knockout pattern on back plate for wall mount.

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face rounded corner design,
- EZ snap-out Chevron directional indicators.


### OPTIONS

- RC: Remote capacity of up to 1.0 watts.
- SPV: UL Listed for 208/220/240 Volt, 50/60 Hz.

### WARRANTY / LISTING

- One year warranty on all electronics and housing. Battery prorated for one year.
- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

### DIMENSIONS

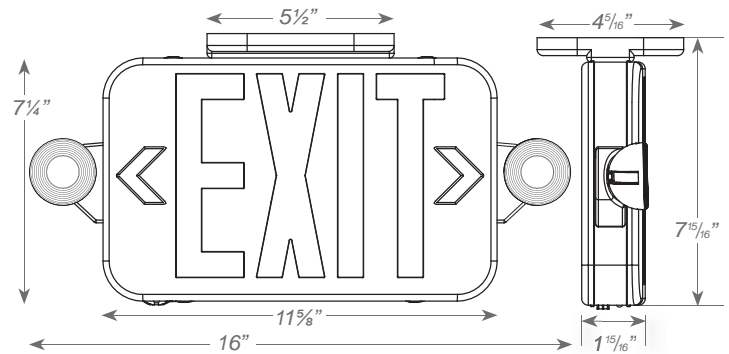

### ORDERING INFORMATION

| MODEL | No. of FACES | LETTER COLOR       | HOUSING COLOR        | OPTIONS  |
|-------|--------------|--------------------|----------------------|--|
| CAP   | 3            | RD Red<br>GN Green | WH White<br>BK Black | RC Remote Capacity<br>SPV 120/230 Volt 50/60Hz |

SALIDA face plate option available. Check with your FME Lighting Representative.