

Project:	
Type:	
Catalog #:	



FEATURES


- Durable sealed die-casting profile for indoor and outdoor applications.
- Round appearance and the ring-shaped luminous surface have a beautiful decorative effect.
- Voltage is 120-277V & 347V-480V.
- Optional accessory with a motion sensor ideal for parking garage and optional for emergency battery.
- Operating temperature is -40°C to 45°C (-40°F to 113°F).

APPLICATIONS

Parking structures, storage areas, shopping area walkways, entryway, and low level security.




PHOTOMETRICS

Parking Garage

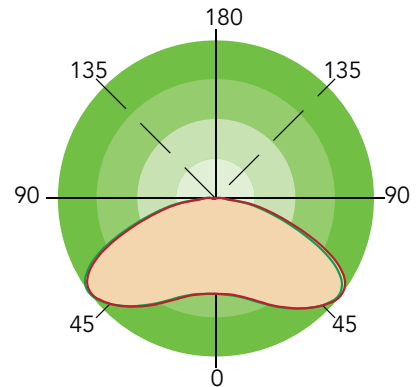

DIMENSION


unit: inch/mm

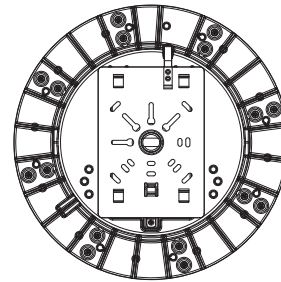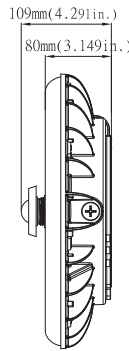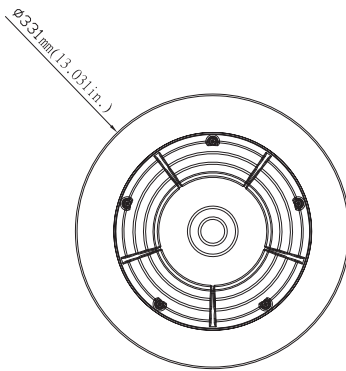

ORDERING GUIDE

Fixture Type	Wattage	Input Voltage	CCT	Finish	Dimmable (Option)	Photometry	Sensor (Option)	Emergency Battery(Option)
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RPM Round Canopy	A 27W B 45W C 48W D 60W E 90W	LV 120-277V HV 347-480V	4K 4000K 5K 5000K	D Dark Bronze B Black W White SG Silver Gray	DM 1-10V Dimmable ND NON Dimmable	PG Parking Garage	MS With Sensor Blank Without Sensor	EM Emergency Battery Blank Without Emergency Battery

Note: 1. 27W, 45W and 90W are limited to 120-277V input only.
2. 48W is only for 347-480V.

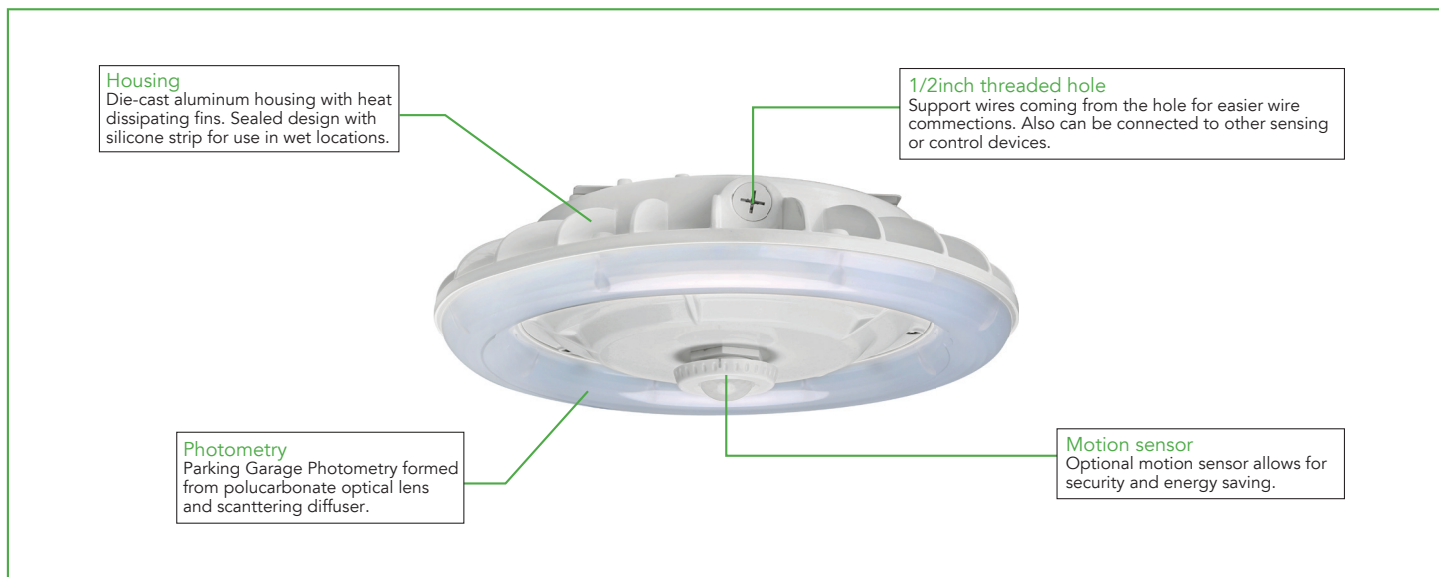

PERFORMANCE DATA

SYSTEM WATTS	PHOTOMETRY	VOLTAGE	4000K(70CRI)		5000K(70CRI)	
			LUMENS	LPW	LUMENS	LPW
27W	Parking Garage	120-277VAC	3500lm	130lm/W	3550lm	131lm/W
45W	Parking Garage	120-277VAC	5400lm	120lm/W	5500lm	122lm/W
48W	Parking Garage	347-480VAC	5850lm	122lm/W	6000lm	125lm/W
60W	Parking Garage	120-277VAC/347-480V	7500lm	125lm/W	7600lm	127lm/W
90W	Parking Garage	120-277VAC	11400lm	127lm/W	11600lm	129lm/W

ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	670	27	120	0.23
		27	208	0.13
		27	240	0.11
		27	277	0.10
1	1120	45	120	0.38
		45	208	0.22
		45	240	0.21
		45	277	0.18
	1200	48	347	0.13
		48	480	0.09
1	1500	60	120	0.50
		60	208	0.29
		60	240	0.25
		60	277	0.22
	1600	60	347	0.17
		60	480	0.13
1	2270	90	120	0.75
		90	208	0.43
		90	240	0.38
		90	277	0.32
		90	347	0.26
		90	480	0.19