

Project:	
Type:	
Catalog #:	



## SPECIFICATIONS

### HOUSING

- Heavy duty die cast aluminum housing
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket
- Tempered clear glass globe
- Surface and Wall mount fixtures include weatherproof box with coin plugs
- Includes reducer bushing to 1/2"

### ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Operating Temperature: -4°F - 122°F

### OPTICAL SYSTEM

- Glass lens
- 50,000 Hours @ L<sub>70</sub>
- CRI >80
- 3000K and 4000K available

### MOUNTING



- Mounts on electrical box (S) or wall (W)

### CODE COMPLIANCE

- cULus Listed for Wet Locations
- IP65 Rated
- LM79 and LM80
- RoHS Compliant

### WARRANTY

- 5 Year

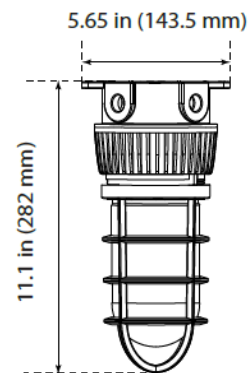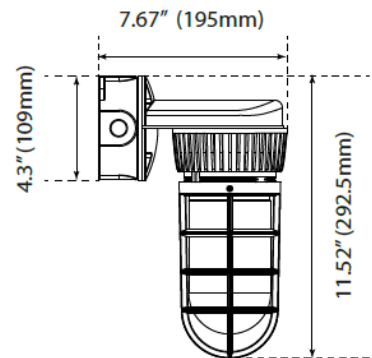

## ORDERING INFORMATION

	Lumens	Color	Mount
JEL-S-20L-QT-30K	1713 Lumens	3000K	J-Box
JEL-S-20L-QT-40K	1713 Lumens	4000K	J-Box
JEL-W-20L-QT-30K	1713 Lumens	3000K	Wall
JEL-W-20L-QT-40K	1713 Lumens	4000K	Wall