

Project:	
Type:	
Catalog #:	



The MGO-8 is a compact, round, budget-friendly high bay that combines great performance with premium aesthetics. The stylish exterior design is very adaptable and can be seamlessly integrated into various environments without being obtrusive. The unique structural design provides maximum durability and reliability, replacing MH up to 1000W. Each model of the MGO-8 has the option for color temperature AND wattage adjustment. It's ideal for a variety of commercial and industrial lighting applications such as warehouses, manufacturing, and stadiums.



100W/150W/160W



210W/230W/235W

FEATURES

CONSTRUCTION

- Casting thermally conducts LED heat to optimize performance and long life.
- With corrosion-resistant powder coating that provides protection and architectural appearance while adapting well to the environment.

OPTICS

- Light engines are available in color tunable version, the CCT can be changed to three CCTs (3000K, 4000K, 5000K) or two CCTs (4000K, 5000K).
- Scalable Lumen Packages from 6,000 to 40,000 Lumens.
- Anti-UV prismatic translucent lens is designed to shape the light uniformity and controls the glare light.

ELECTRICAL

- Universal 120-277VAC input voltage.
- 0-10V dimming standard with a dimming range of 100% to 10%.
- PF >90%, THD <20%, 6KV surge protection.
- Operating Temperature Range: -40°C to 45°C (-40°F to 113°F) or -40°C to 50°C (-40°F to 122°F).

Note: Operating with emergency battery temperature range: 5°C to 50°C (+41°F - + 122°F).

LIFESPAN

- Estimated 50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

WARRANTY

- Five-year warranty.

CERTIFICATIONS

- UL cUL wet location listed.
- DesignLights Consortium™ Qualified.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at +/-25°C (77°F). Specifications subject to change without notice.

ACCESSORIES



Emergency Battery
25W 3500lm 90min,
suit for 210W, 230W.
15W 2000lm 90min,
suit for
100W, 150W, 160W



Plug-and-Play PIR Sensor
PIR sensor:
ANT-6-4T Bluetooth PIR
sensor: ANT-6-4T-BLE-SR




Plug-and-Play Microwave Sensor
Microwave sensor:
ANT-5-4T Bluetooth
microwave sensor: ANT-5-4T-BLE-SR



U-Bracket
Use for surface
mount




Aluminum reflector

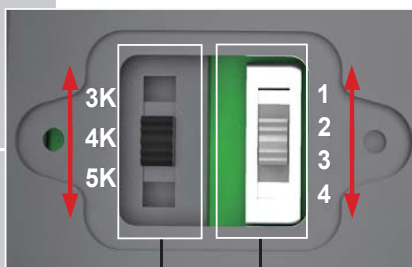

CCT AND WATTAGE SELECTABLE

The MGO-8 has the function to adjust the lumen output and color temperature on-site.


CCT SELECT



3000K 4000K 5000K

Offer three CCT adjustable (3000K, 4000K, 5000K) or two CCT adjustable (4000K, 5000K)

WATTAGE SELECT





40% 60% 80% 100%

Each model supports 4 positions wattage regulation: 100%, 80%, 60%, 40%

Emergency Battery

25W 3500lm 90min

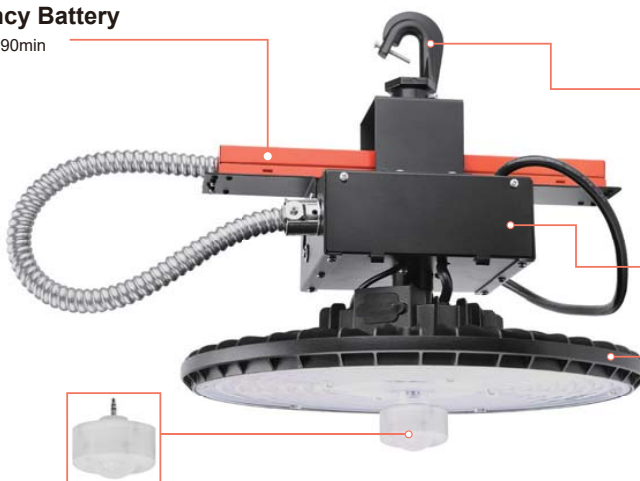

Installation accessory

Available for both hook mount, conduit mount and surface mounting with U-bracket(optional). U-bracket allows to adjust the direction to illuminate any area you need.

Transformer BOX

Transformer can be easily added into the Junction-box and convert to HV models, reducing SKUs and inventory pressure.

Housing

Rugged die-cast housing with corrosion-resistant powder coating for effective protection.

NUMBER OF DRIVERS	DRIVER CURRENT (MA)	NOMINAL POWER (W)	INPUT VOLTAGE (V)	CURRENT (AMPS)
1	800	100	120	0.83
		100	208	0.48
		100	240	0.42
		100	277	0.36
1	1150	150	120	1.25
		150	208	0.72
		150	240	0.63
		150	277	0.54
1	1280	160	120	1.33
		160	208	0.77
		160	240	0.67
		160	277	0.58
1	1700	210	120	1.75
		210	208	1.01
		210	240	0.88
		210	277	0.76
1	1750	230	120	1.92
		230	208	1.11
		230	240	0.96
		230	277	0.83
1	1850	235	120	1.96
		235	208	1.13
		235	240	0.98
		235	277	0.85

PERFORMANCE DATA

MGO-8 100W								
SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	100W	70	14000lm	140 lm/W	16000lm	160 lm/W	14500lm	145 lm/W
80%	80W	70	11600lm	145 lm/W	13000lm	163 lm/W	12000lm	150 lm/W
60%	60W	70	9000lm	150 lm/W	10000lm	167 lm/W	9400lm	157 lm/W
40%	40W	70	6200lm	155 lm/W	7000lm	175 lm/W	6500lm	163 lm/W

MGO-8 150W								
SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	150W	70	22000lm	147 lm/W	24000lm	160 lm/W	22500lm	150 lm/W
80%	120W	70	18000lm	150 lm/W	20000lm	167 lm/W	19000lm	158 lm/W
60%	90W	70	14000lm	156lm/W	15500lm	172 lm/W	14600lm	162 lm/W
40%	60W	70	9800lm	163 lm/W	10800lm	180 lm/W	10000lm	167 lm/W

MGO-8 160W								
SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	160W	70	25000lm	156 lm/W	27000lm	169 lm/W	26000lm	163 lm/W
80%	128W	70	21000lm	164 lm/W	22500lm	176 lm/W	21500lm	168 lm/W
60%	96W	70	16000lm	167 lm/W	17500lm	182 lm/W	16500lm	172 lm/W
40%	64W	70	11000lm	172 lm/W	12000lm	188 lm/W	11500lm	180 lm/W


MGO-8 210W								
SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	210W	70	30000lm	143 lm/W	32000lm	152 lm/W	30500lm	145 lm/W
80%	168W	70	24500lm	146 lm/W	26500lm	158 lm/W	25000lm	149 lm/W
60%	126W	70	19000lm	151 lm/W	21000lm	167 lm/W	20000lm	159 lm/W
40%	84W	70	13500lm	161 lm/W	14500lm	173 lm/W	14000lm	167 lm/W

MGO-8 230W								
SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	230W	70	34000lm	148 lm/W	36000lm	157 lm/W	35000lm	152 lm/W
80%	184W	70	28000lm	152lm/W	30000lm	163 lm/W	29000lm	158 lm/W
60%	138W	70	22000lm	159 lm/W	24000lm	174 lm/W	23000lm	167 lm/W
40%	92W	70	15500lm	168 lm/W	16500lm	179 lm/W	16000lm	174 lm/W


MGO-8 235W (Single CCT only)								
SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	235W	70	37000lm	157 lm/W	40000lm	170 lm/W	40000lm	170 lm/W
80%	188W	70	31000lm	165 lm/W	33000lm	176 lm/W	33000lm	176 lm/W
60%	141W	70	24000lm	170 lm/W	25500lm	181 lm/W	25500lm	181 lm/W
40%	94W	70	16500lm	176 lm/W	17500lm	186 lm/W	17500lm	186 lm/W

DIMENSION

unit: mm/inch

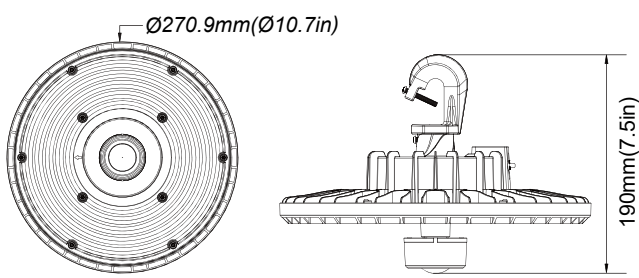

100W/150W/160W

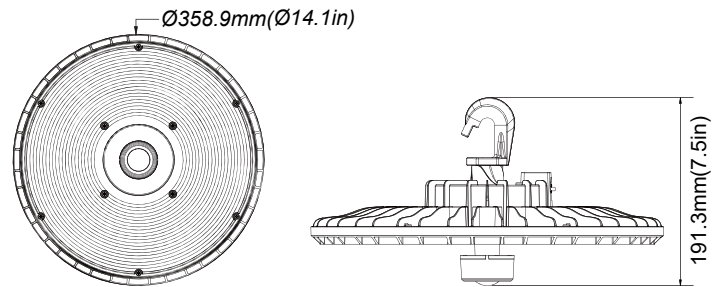

210W/230W/235W

ORDERING GUIDE

Fixture Type	Wattage	Voltage	CCT	Finish	Mounting	Options	
MGO-8	10	100W	LV 120-277V	S ¹ 3000K	B Black	H Hook	EM Emergency Battery Back Up
	15	150W		I ¹ 4000K	D Dark Bronze	P Pendant	PR Bluetooth PIR Sensor
	16 ²	160W		C ¹ 5000K	W White	U U-Bracket	MS Bluetooth Microwave Sensor
	21	210W		2C 4000K / 5000K			AR Aluminum Reflector
	23	230W		3C ³ 3000K / 4000K / 5000K			HV 480V Transformer
	235 ¹	235W					

Note: 1. Only 235W suit for single CCT: 30K, 40K or 50K.
 2. The ambient temperature of 160W and 235W: -40°C to 45°C (-40°F to 113°F)
 3. Contact factory for inventory.

MOUNTING



Hook Mount



Conduit Pendant Mount



U-Bracket Mount

PHOTOMETRICS

