

Project:	
Type:	
Catalog #:	




FEATURES

- **Efficiency:** 150lm/W is standard, additional options include 180lm/W. Max lumen package is 56,000lm.
- **Wattage:** Three wattages packages up to 320W
- **Construction:** Black die-cast aluminum housing and heatsink, please contact factory for custom color options.
- **Driver:** 0-10V dimmable driver is standard.
- **Voltage:** Universal 120-277 VAC (50/60Hz). Options include:
 - 120-347 VAC(50/60Hz)
 - 277-480 VAC (50/60Hz)
- **Surge Suppression:** Input transient surge protection (6kV)
- **Color Temperature:** Integrated dip switch operation to select CCT. Options include: 4000K or 5000K.
- **CRI:** >80
- **IP65**
- **Optics:** 120° standard, options include 60° or 90°.
- **Mounting:** Hook mount with set screw is standard. Options include:
 - Ring Mount
 - U-Bracket
 - Pendant Mount Adapter
- **Controls:** Standard integral expansion port located in the center of the fixture. This allows for easy installation of bluetooth or controller operated sensor. Available sensor options include:
 - Daylight Harvesting Sensor
 - Motion
 - PIR
- Battery backup options are available, please contact factory.
- Warranty 5 Years
- Wet Location Rated.
- Ambient Temperature rating -40C to 45C



WATTAGE SELECTABLE



APPLICATION


- Warehouses
- Stadiums
- Factories
- Grocery Stores / Supermarkets
- Logistics Centers
- Exhibition Halls



(310/280/240) W

OPTICS:

- 120° standard, options include 60° or 90°.

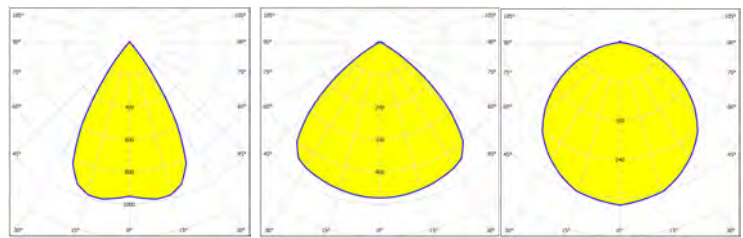


60°

90°

120°


REFLECTOR

- Optional aluminum or PC reflector

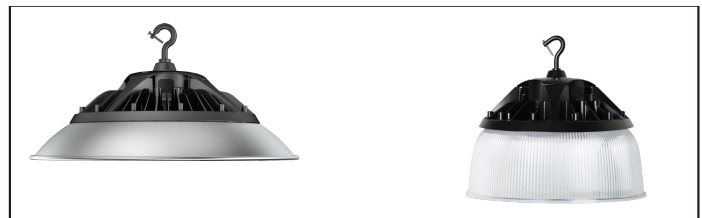

DIMENSIONS & WEIGHT


100W/120W

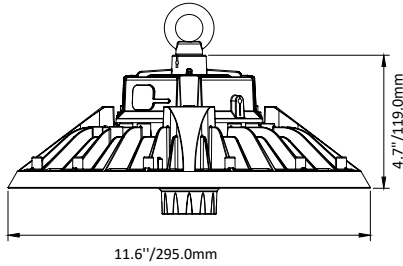

11.6"/295.0mm

Net Weight: 4.6Lbs/2.1kgs


200W

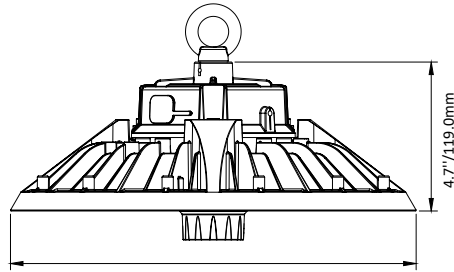

12.8"/325.0mm

Net Weight: 6.8Lbs/3.1kgs

310W

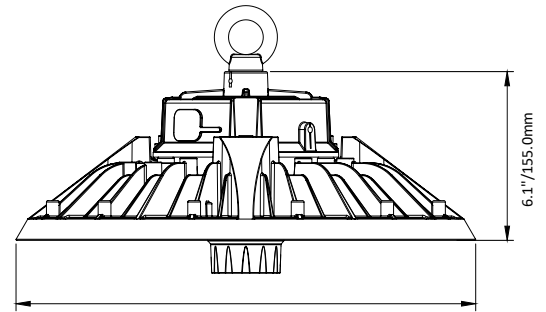

13.8"/350.0mm

Net Weight: 9.3Lbs/4.2kgs

LUMEN OUTPUT

Wattage	Lumen @50K @140-150lm/w	Lumen @50K @170-180lm/w
100W	15000lm	17000lm
120W	18000lm	20400lm
(150/120/100)W	Max. 22500lm	Max. 25500lm
(150/120/100)W	Max. 22500lm	/
200W	30000lm	34000lm
(240/200/180)W	Max. 36000lm	Max. 40800lm
(240/200/180)W	Max. 36000lm	/
310W	46,500lm	52700lm
(310/280/240)W	Max. 46,500lm	Max. 52700lm
(310/280/240)W	Max. 46,500lm	/

ORDERING INFORMATION

MODEL	WATTAGE		CCT	EFFICACY		MOUNTING		VOLTAGE	
VIC-Q2	A	100W	4	4000K	15	150lm/W	H	G-Hook	LV 120-277V
	B	120W	5	5000K	18	180lm/W	R	Ring (Standard)	
	C	150W	SIC ²	Tunable			UB	U-Bracket	HV 120-347V
	D	200W							
	E	240W							
	F	320W							
	C1 ¹								
	E1 ¹								
F1 ¹									

¹
C1 = 100W, 120W, 150W
E1 = 180W, 200W, 240W
F1 = 240W, 280W, 320W
²
SIC= 4000K, 5000K Tunable.
 120/277V only

OPTIONS & ACCRSORIES

ARS	Aluminum Reflector (100W, 120W, 150W)
ARL	Aluminum Reflector (200W-320W)
PCRS	PC Reflector (100W, 120W, 150W)
PCRL	PC Reflector (200W-320W)
EM	Battery Backup

CONTROL OPTIONS:

DLS	Daylight Sensor
MMS	Microwave Motion Sensor
PIR	PIR Sensor
WMS	Wireless Networking Motion Sensor (Bluebooth)
WPIR	Wireless Networking PIR Sensor (Bluebooth)
RC	Remote Controller

Emergency Battery Backup



Accessories

Intelligent control

