

Project:	
Type:	
Catalog #:	



The ECLIPSE SERIES Class 1, Division 2 Explosion Proof Hazardous Location Luminaire is available with a clear tempered glass lens. Typical lighting applications include industrial facilities, oil, gas, painting facilities, manufacturing, and auto service facilities.

SPECIFICATIONS AND FEATURES

HOUSING: Heavy-Duty Die Cast Aluminum Housing

LISTING AND RATINGS: ETL Listed for Hazardous Locations Per UL844 as Follows: Class 1, Division 2 Groups A, B, C, D; T4 Temperature Rating, -25°C to +50°C Ambient. Suitable for Wet Locations, IP66 Sealed LED Compartment

FINISH: Powdercoat Finish Over a Chromate Conversion Coating.

LENS: Clear Tempered Glass Lens

MOUNTING OPTIONS: Mountings Include Pendant (Conduit by Others), Ceiling Mount Box, 25° and 90° Wall Mount with Box, 25° and 90° Stanchions, and Adjustable Yoke. Yoke Mount Includes 3' 16/3 SJOWW Yellow Jacketed Cord and Rated Connector. Rated for 6 #12 AWG 90°C for Through Wiring. Mounts Shipped Separately, Field Installed.

LED: Aluminum Boards

WATTAGE: Array: 56.7w, System: 64w

DRIVER: Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

WARRANTY

5-Year Warranty. See Page 4 for Projected Lumen Maintenance Table.


PENDANT MOUNT




CEILING MOUNT



WALL MOUNTS

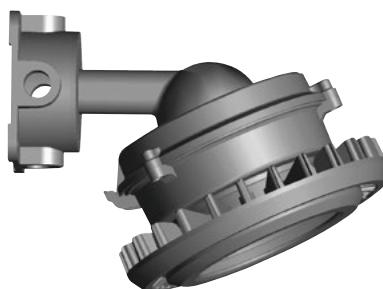


Shown with 25° Wall Mount

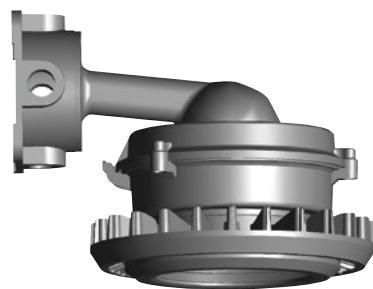


Shown with 90° Wall Mount

STANCHION MOUNTS

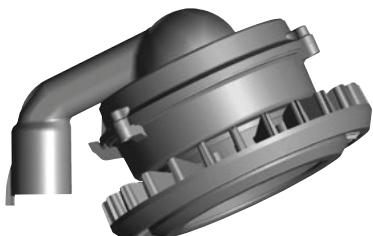


Shown with 25° Stanchion Mount

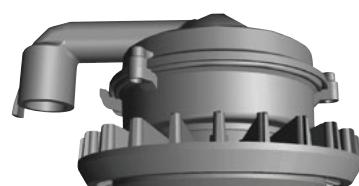


Shown with 90° Stanchion Mount

FLOOD



Shown with 25° Adjustable Yoke


PENDANT MOUNT

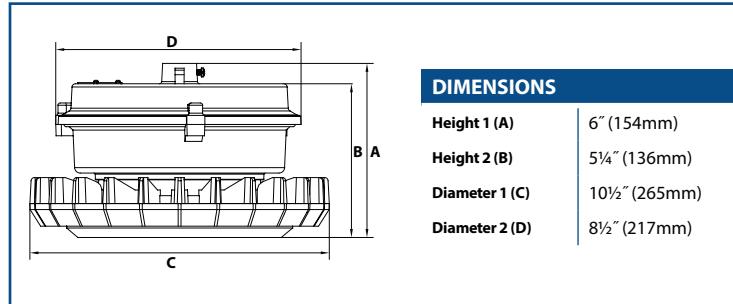

1/2" Pendant Hub

	B	57	LV	5K	TG	GR	D	
Model	Optics	Wattage	Driver	CCT	Lens	Color	Mount	Options
ECLIPSE Hazardous Location Explosion Proof Luminaire	B=Wide	57 =57w	LV =120-277V	5K =5000K	TG =Clear Tempered Glass Lens	GR =Gray	D =Pendant Mount (Conduit by Others)	SP =Surge Protection


CEILING MOUNT

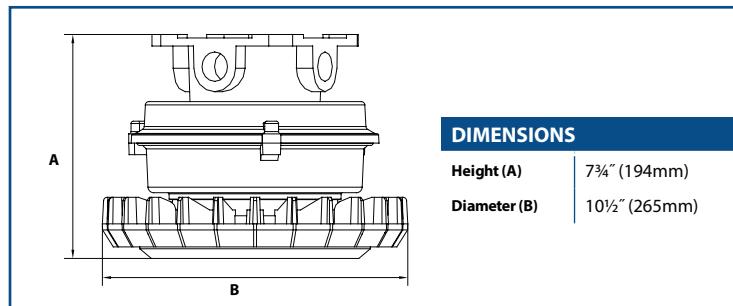


3/4" Entrance Plugs

	B	57	LV	5K	TG	GR	Q	
Model	Optics	Wattage	Driver	CCT	Lens	Color	Mount	Options
ECLIPSE Hazardous Location Explosion Proof Luminaire	B=Wide	57 =57w	LV =120-277V	5K =5000K	TG =Clear Tempered Glass Lens	GR =Gray	Q =Ceiling Mount	SP =Surge Protection

WALL MOUNTS

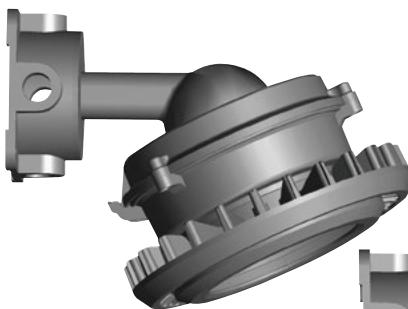


Shown with 25° Wall Mount

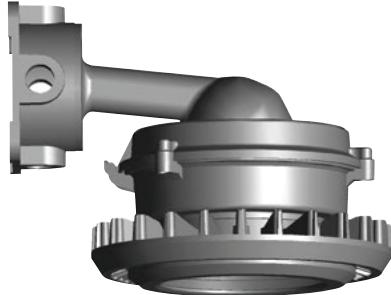

Shown with 90° Wall Mount

¾" Entrance Plugs


25° Wall Mount



DIMENSIONS

Height 1 (A)	10" (256mm)
Height 2 (B)	5½" (140mm)
Length (C)	13¾" (352mm)
Width (D)	10½" (265mm)

90° Wall Mount



DIMENSIONS


Height 1 (A)	9¾" (246mm)
Height 2 (B)	5½" (140mm)
Length (C)	13¼" (336mm)
Width (D)	10½" (265mm)

	B	57	LV	5K	TG	GR		
Model	Optics	Wattage	Driver	CCT	Lens	Color	Mount	Options
ECLIPSE Hazardous Location Explosion Proof Luminaire	B=Wide	57=57w	LV=120-277V	5K=5000K	TG=Clear Tempered Glass Lens	GR=Gray	W25=25° Wall Mount W90=90° Wall Mount	SP=Surge Protection

STANCHION MOUNTS




Shown with 25° Stanchion Mount

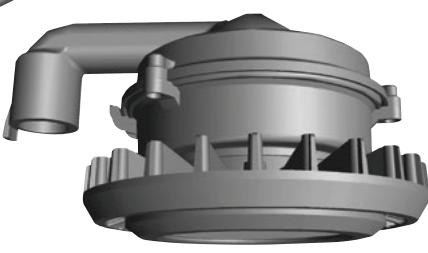

Mounts to 1¼" NPT

Shown with 90° Stanchion Mount


25° Stanchion



DIMENSIONS

Height 1 (A)	8½" (216mm)
Length (B)	13½" (343mm)
Width (C)	10½" (265mm)

90° Stanchion




DIMENSIONS


Height 1 (A)	7¼" (186mm)
Length (B)	13¼" (338mm)
Width (C)	10½" (265mm)

	B	57	LV	5K	TG	GR		
Model	Optics	Wattage	Driver	CCT	Lens	Color	Mount	Options
ECLIPSE Hazardous Location Explosion Proof Luminaire	B=Wide	57=57w	LV=120-277V	5K=5000K	TG=Clear Tempered Glass Lens	GR=Gray	S25=25° Stanchion S90=90° Stanchion	SP=Surge Protection

FLOOD


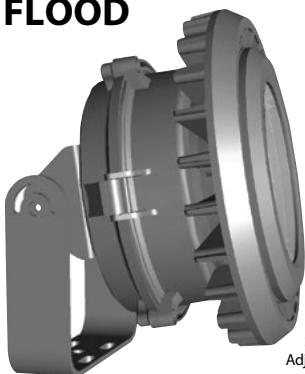


Shown with
Adjustable Yoke

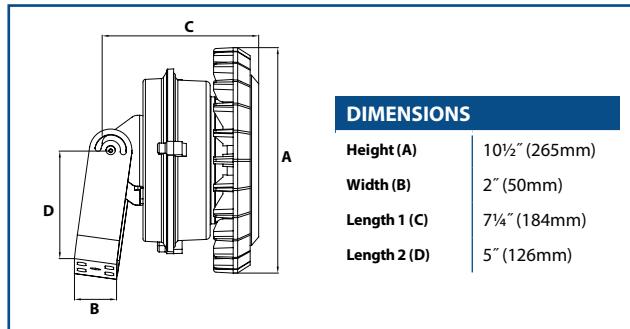

	B	57	LV	5K	TG	GR	E	
Model	Optics	Wattage	Driver	CCT	Lens	Color	Mount	Options
ECLIPSE Hazardous Location Explosion Proof Luminaire	B=Wide	57=57w	LV=120-277V	5K=5000K	TG=Clear Tempered Glass Lens	GR=Gray	E=Adjustable Yoke	SP=Surge Protection

PHOTOMETRIC DATA

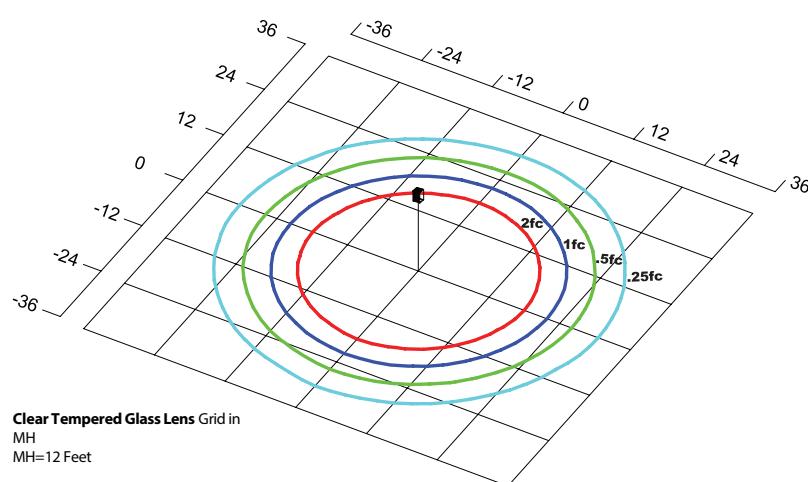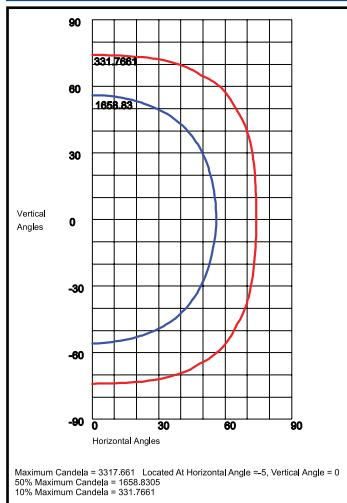

Clear Tempered Glass Lens

PHOTOMETRIC PERFORMANCE

5000 CCT 80 CRI						
LED Board Watts	Drive Current (mA)	Input Watts	Optics	Lumens	LPW	
57w (Clear Lens)	175	64	F	110°H x 110°V, NEMA 7H x 7V	8,957	140

PROJECTED LUMEN MAINTENANCE

Data shown for 5000 CCT			Compare to MH				
TM-21-11		Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70 at 25°C
L70 Lumen Maintenance at 25°C / 77°F		64	1.00	0.96	0.92	0.84	183,000
TM-21-11		Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80 at 40°C
L80 Lumen Maintenance at 50°C / 104°F		64	1.00	0.93	0.86	0.71	105,000
TM-21-11		Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80 at 40°C
L80 Lumen Maintenance at 40°C / 104°F		64	1.00	0.94	0.88	0.75	81,000

NOTES:

- Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 175mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
- Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.