

Project:	
Type:	
Catalog #:	



EXTERNAL SPECIFICATIONS

The compact, recessed design of the FLEX SQUARE RECESSED REMOTE has a modern look that blends seamlessly in today's retail and commercial environments. The steel trim comes standard in a white powder coat with optional painted finishes.

INTERNAL SPECIFICATIONS

The FLEX SQUARE RECESSED REMOTE is configured 12-24V 10W LED.


LED TECHNOLOGY

The FLEX SQUARE RECESSED REMOTE is illuminated with four (4) 2.5W Samsung LEDs. Under any operation, the FLEX SQUARE RECESSED REMOTE delivers between 826 lm - 845 lm. Each pair of LEDs are laid out in parallel on the LED module so if one pair fails, the other will remain illuminated. A high-efficiency LED driver is used to maintain a constant output current to all LEDs. The LEDs are rated for >54,000 hours at L80.

INSTALLATION

The FLEX SQUARE RECESSED REMOTE is designed for recessed mount. The FLEX SQUARE RECESSED REMOTE is suitable for use in non-IC installations only.

DIMENSIONS (in, mm.)

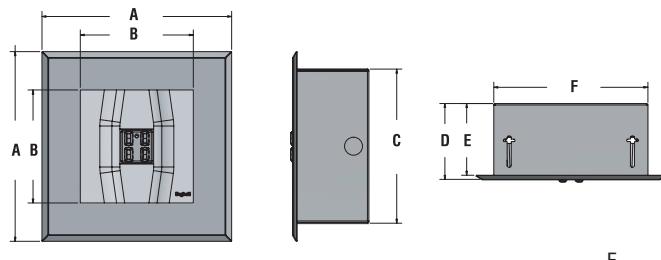

Series	A	B	C	D	E	7.5" 191mm
FLX-SR	9.25" 235mm	5.5" 140mm	7.5" 191mm	3.75" 95mm	3.5" 127mm	

FCC

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CSA 22.2 No. 141 performance certified.

ORDERING LOGIC

Series	Options
FLX-SR	CC (custom color - specify)

NOTE 1: Unswitchable.