

Project:	
Type:	
Catalog #:	



EXTERNAL SPECIFICATIONS

The **JAWS remote** is made from die- cast aluminum head and the glass lens offer protection and superior performance. The powder coated aluminum canopy is fully gasketed and suitable for wet location. The flex arm design allows you to position the remote by moving the flex arm up and down as you rotate side to side.

NEMA 4X DESIGN

The **JAWS remote** has been designed to withstand moisture and corrosive elements and has a NEMA 4X rating. The entire internal cavity of the remote is protected from moisture ingress by an extremely resilient


gaskets. The operating temperature is from -22°F up to 104°F (-30°C up to 40°C).

ORDERING INFORMATION

JAWS remote	Head No.	Voltage	Lamp	Options
JAW-R	1 (single)	6V	See Lamp Selection	TC (Teflon® coated lens)
	2 (double)	12V		
		24V		

EXAMPLE: JAW-R-2-12V5W-LED

DIMENSIONS (IN,MM.)

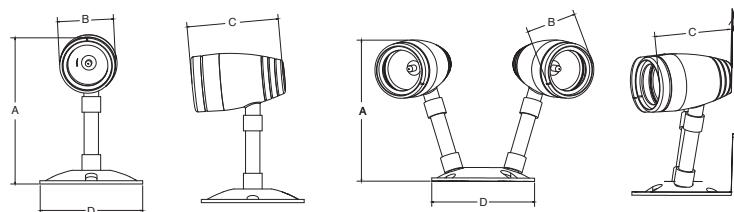

JAW remote	A	B	C	D
Single Head	5 ^{7/8} " 149mm	2 ^{1/4} " 57mm	3 ^{11/16} " 94mm	4 ^{1/8} " 105mm
Double Head	5 ^{5/8} " 143mm	2 ^{1/4} " 57mm	3 ^{11/16} " 94mm	4 ^{1/8} " 105mm

INSTALLATION

The **JAWS remote** is supplied with a weatherproof canopy designed to fit most electrical junction boxes for surface ceiling or wall mount applications. Suitable for indoor, outdoor, damp or wet location applications with NEMA 4X protection.

SANITATION LISTED

The **JAWS remote** is sanitation listed. The Intertek verified splash zone listing is equivalent to the NSF standard 2, meeting the rigorous sanitation standards of food service environments.

LAMP SELECTION

	6V	12V	24V
MR16	6, 10W	10, 12, 20, 35, 50W	10, 12, 50W
MR16 LED	5, 7W	2, 5, 7W	5, 7W

WARRANTY

The JAWS remote comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.