

Project:	
Type:	
Catalog #:	



COMPACT DESIGN

The MAVERICK REMOTE has been designed to blend into the interior design. The clear polycarbonate lens and white powder coated backplate is neutral for any decor.

EXTERNAL SPECIFICATIONS

The MAVERICK REMOTE is designed to withstand the elements and abuse in applications such as schools, corridors, institutions, and apartment complexes. Universal knockout mounting pattern and key hole slots are cast into the mounting plate.


ELECTRICAL SPECIFICATIONS

The MAVERICK REMOTE series is available with high output LED, LED MR16, MR16, or GU10 lamps.

MECHANICAL SPECIFICATIONS

The MAVERICK REMOTE is constructed of white powder coated die-cast aluminum mounting plate with an impact resistant polycarbonate protective lens. The MAVERICK REMOTE mounting plate is standard in an attractive powder coated white finish. Other colors are available, including custom color matching.

DIMENSIONS (in, mm.)

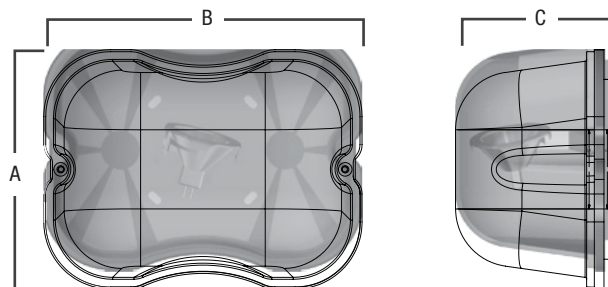

Series	A	B	C
MAV-R	6 1/4" 159mm	8 1/4" 210mm	3 3/4" 95mm

INSTALLATION

The MAVERICK REMOTE series is supplied with a universal mounting plate for surface ceiling or wall mount applications. Suitable for indoor applications. The operating temperature is -40°F to 113°F (-40°C to 45°C).

ORDERING LOGIC

Series	Lamp No.	Voltage/Wattage	Options
MAV-R	1 (single lamp)	See Lamp Selection	CC (custom color mounting plate)
	2 (double lamp)		BPG9 ¹ (wireguard)
			TPS (tamper proof screws)

NOTE 1: Order as a separate line item (BPG9).

LAMP SELECTION

Lamp	6V	12V	24V	120V
MR16	6, 10W	10, 12, 20, 35, 50W	10, 12, 25, 50W	N/A
MR16 LED	5, 7W	2, 5, 7W	5, 7W	N/A
GU10	N/A	N/A	N/A	20W

WARRANTY

The MAVERICK REMOTE comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.

ELECTRICAL RATING

Uncharged						Full Charged					
Power (W)	AC Current (A) AC Voltage		Frequency (Hz)	DC Voltage (V)	DC Current (mA)	Stand By Power (W)	AC Current (A) AC Voltage		Frequency (Hz)	DC Voltage (V)	DC Current (mA)
	120V	277V					120V	277V			
14.56	0.13	0.07	50/60	11.97	0.64	2.1	0.068	0.034	50/60	13.66	0.00

NOTE: Electrical rating is for MR-16 7W/12V LED lamp only.