

Project:	
Type:	
Catalog #:	



Size: 2'




Size: 4'



Features

- Available with 2ft and 4ft as per applications.
- Truly UL 94 Flame Rating - 5VA rating on housing.
- PIR sensor optional and supports emergency battery.
- Optional DR frost low profile lens distribution or parking garage as per application.
- Standard 1-10V dimming available, Projected life span of 50,000 hrs.
- Operating temperature is -40°C to 45°C (-40°F to 113°F).
- UL/cUL wet location listed and DLC qualified.
- Assembled in America.

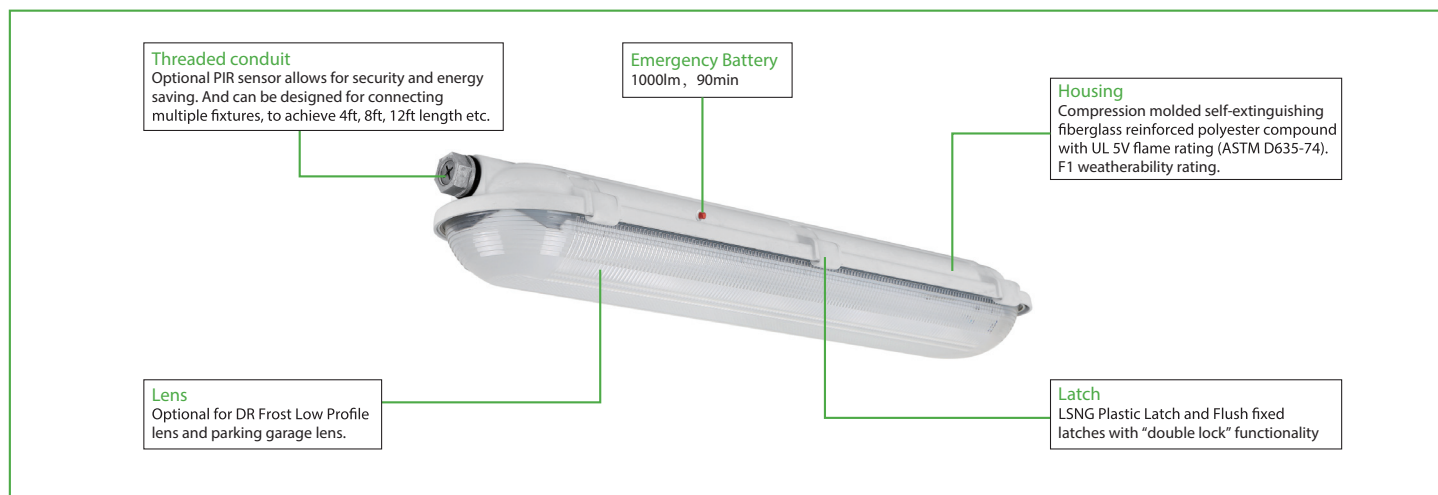

PERFORMANCE DATA


SYSTEM WATTS	SIZE	VOLTAGE	LENS	3000K(80CRI)		4000K(80CRI)		5000K(80CRI)	
				LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
30W	2 FT	120-277VAC	Parking Garage Lens	3100lm	103 lm/W	3400lm	113 lm/W	3430lm	114 lm/W
			DR Frost Low Profile Lens	3200lm	106 lm/W	3400lm	113 lm/W	3430lm	114 lm/W
40W	2 FT	120-277VAC	Parking Garage Lens	4000lm	100 lm/W	4300lm	108 lm/W	4350lm	109 lm/W
			DR Frost Low Profile Lens	4100lm	102 lm/W	4300lm	108 lm/W	4350lm	109 lm/W
45W	4 FT	120-277VAC	Parking Garage Lens	4700lm	104 lm/W	4900lm	109 lm/W	4950lm	110 lm/W
			DR Frost Low Profile Lens	4800lm	106 lm/W	4900lm	109 lm/W	4950lm	110 lm/W
60W	4 FT	120-277VAC	Parking Garage Lens	6000lm	100 lm/W	6300lm	105 lm/W	6350lm	106 lm/W
			DR Frost Low Profile Lens	6100lm	101 lm/W	6400lm	107 lm/W	6450lm	108 lm/W

ELECTRICAL DATA


Size	Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
2 FT	1	730	30	120	0.25
			30	208	0.14
			30	240	0.13
			30	277	0.11
2 FT	1	980	40	120	0.33
			40	208	0.19
			40	240	0.17
			40	277	0.14
4 FT	1	1100	45	120	0.38
			45	208	0.22
			45	240	0.19
			45	277	0.16
4 FT	1	1500	60	120	0.50
			60	208	0.29
			60	240	0.25
			60	277	0.22

MOUNTING OPTION

- Surface mount





- V Hooks



DIMENSION



unit: inch/mm

Parking garage

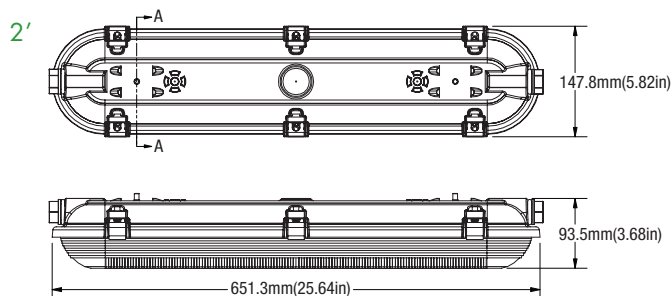

Weight: 4.943lb

Parking garage
4'


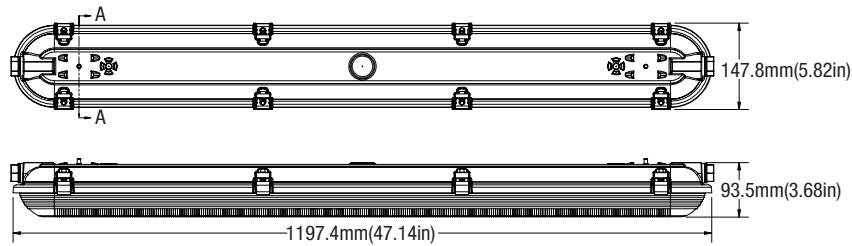


Section A-A

Weight: 9.087lb

DR Frost Low Profile Lens

2'


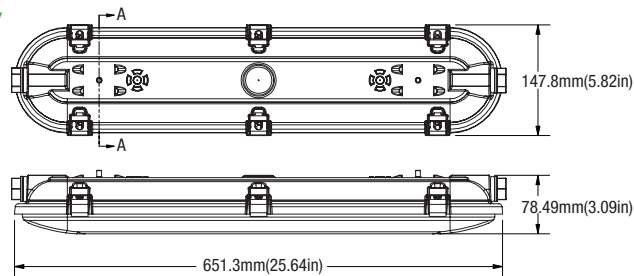


Section A-A

Weight: 4.345lb

DR Frost Low Profile Lens

4'

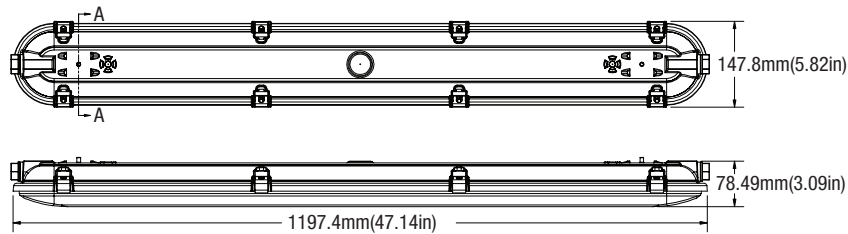


Section A-A

Weight: 7.753lb


CHOOSE YOUR OPTICAL DISTRIBUTION

Each optic is designed for a specific purpose. The low bay distribution allows a wash of light in any application. In addition, we design an optics specially for parking garage.

Low Bay



Parking Garage



ORDERING GUIDE

Fixture Type	Wattage	Voltage	CCT	Sensor (Option)	Backup Battery (Option)	Photometry
☐	☐	☐	☐	☐	☐	☐
OAK	A 30W B 40W C 45W D 60W	LV 120-277V	4K 4000K 5K 5000K	Blank Without Sensor S With Sensor	EM Emergency Battery Blank Without Emergency Battery	LB Low Bay Distribution PG Parking Garage