

Project:	
Type:	
Catalog #:	



FEATURES

- 2021 Private mold, unique design
- AC120-277V / 120-347V optional
- SMD2835 LED
- High efficacy, 150lm/W or 180lm/W
- Microwave sensor and Emergency backup optional
- High power factor, low THD driver with 4KV surge protection
- IP66 waterproof, dust, corrosion, and pressure-proof
- Operating temperature: -30°C ~ 45°C (-22°F ~ 113°F)
- 5 year warranty

APPLICATION

- Warehouses
- Stadiums
- Factories
- Grocery Stores / Supermarkets
- Logistics Centers
- Exhibition Halls

Bracket instruction




O-HOOK



G-HOOK



U-BRACKET

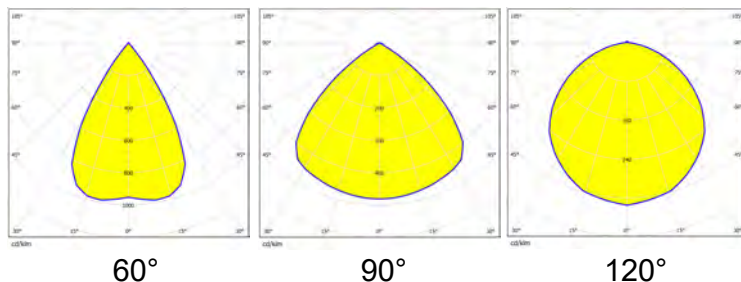

ORDERING INFORMATION

MODEL	WATTAGE		CCT		CRI	VOLTAGE		MOUNTING		SENSOR		EFFICACY	
VIC-Q	A	80W	3	3000K	7 Ra70	LV	120-277V	OH	O-Hook	Y	Yes	LE	150lm/W
	B	100W	4	4000K		HV	120-347V	GH	G-Hook	N	No	HE	180lm/W
	C	150W	5	5000K				UB	U-Bracket				
	D	200W	57	5700K									
	E	240W	CT	Tunable									
	LW	Low Watt											
	HW	High Watt											

LW = 80W, 100W, 120W, 150W
HW = 180W, 200W, 220W, 240W

CT = 3000K, 4000K, 5000K, 5700K Tunable

ADDITIONAL ORDERING:

Please specify **HOUSING COLOR** (standard is black) :
white, black (leave blank for black)

Please specify **DRIVER COLOR** (standard is black) :
white, blue, red, orange, yellow, green, black (leave blank for black)

SPECIFICATION FEATURES


Driver Housing

white · blue · red · orange · yellow · green · black
driver housing color optional

Housing


Patented design IP66
Super thin design
White · Black
optional

Wattage tunable



LED driver

Build-in driver
AC120-277V/120-34 7V

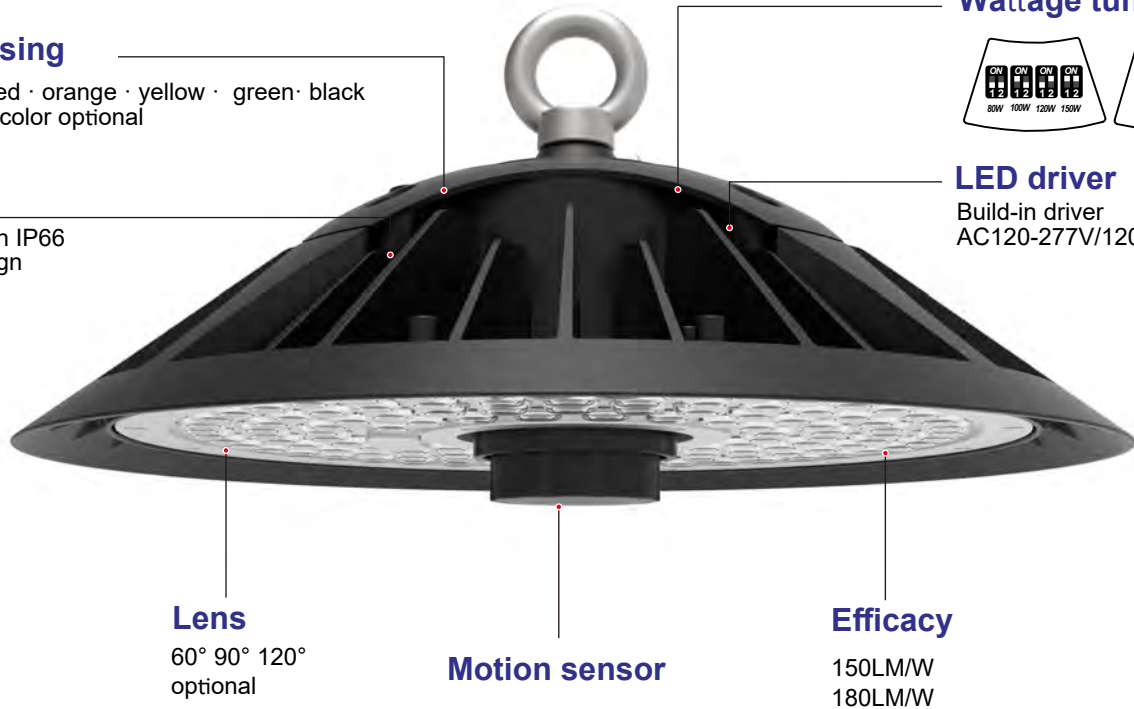

Lens

60° 90° 120°
optional

Motion sensor


Efficacy

150LM/W
180LM/W

Parameters

Model	Power	Input voltage	Size	CRI	CCT	Lumen@150LM/W	Lumen@180LM/W	Beam angle
VIC-Q-80W-X-7-XX	80W	AC120-277V AC120-347V	Φ316.1x107.2mm	>70	3000K 4000K 5000K 5700K	12000LM	14400LM	60° 90° 120°
VIC-Q-100W-X-7-XX	100W					15000LM	18000LM	
VIC-Q-150W-X-7-XX	150W					22500LM	27000LM	
VIC-Q-200W-X-7-XX	200W	AC120-277V AC120-347V	Φ340.8x128mm	>70	3000K 4000K 5000K 5700K	30000LM	36000LM	60° 90° 120°
VIC-Q-240W-X-7-XX	240W					36000LM	43200LM	
VIC-Q-LW-X-7-XX	80W	AC120-277V AC120-347V	Φ316.1x107.2mm	>70	3000K 4000K 5000K 5700K	22500LM	27000LM	60° 90° 120°
	100W							
	120W							
	150W							
VIC-Q-HW-X-7-XX	180W	AC120-277V AC120-347V	Φ340.8x128mm	>70	3000K 4000K 5000K 5700K	36000LM	43200LM	60° 90° 120°
	200W							
	220W							
	240W							

Dimension

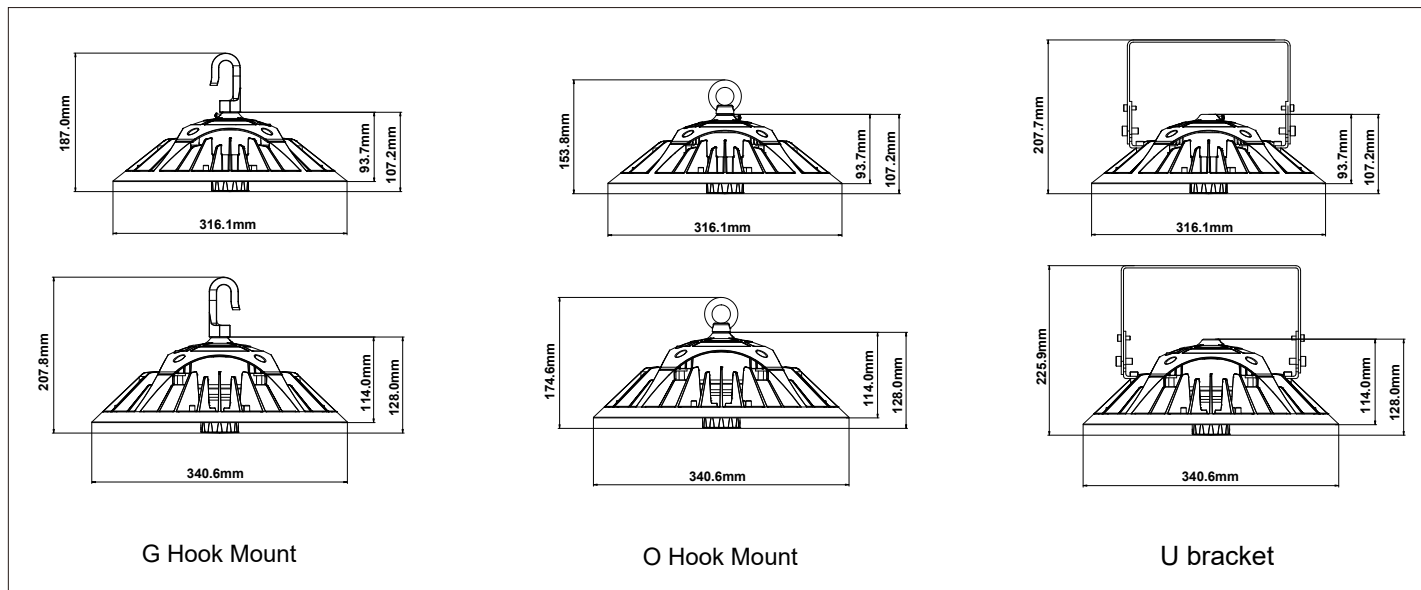

Package Info

Model	Mount	CartonDimension(mm)	Qty / Carton	N.W	G.W	20GP	40HQ
80-150W	O/G Hook	L355 x W355 x H140	1pc	2.95KG	3.65KG	1440pcs	3270pcs
80-150W	U bracket	L355 x W355 x H150	1pc	3.55KG	4.25KG	1344pcs	3080pcs
180-240W	O/G Hook	L400 x W400x H155	1pc	4.05KG	4.95KG	1050pcs	2490pcs
180-240W	U bracket	L400 x W400 x H168	1pc	4.65KG	5.55KG	980pcs	2345pcs