

Project:	
Type:	
Catalog #:	

PRODUCT DESCRIPTION

The Tunable LED Troffer, 130 lm/W, 0-10V Dimmable, Premium Indoor Luminaires, Smart Sensor Ready. Illuminate indoor facilities day and night with Tunable technology for 9X Setting Combinations, Select (3500K, 4000K, 5000K), Select 2x2 (20W, 25W, 30W) or Select 2x4 (30W, 35W, 42W).

APPLICATIONS

Premium indoor luminaire suitable for general indoor commercial spaces, lobbies, offices, meeting rooms, schools, retail stores, restrooms, hallways, and work-stations.

CONSTRUCTION

Manufactured for durability using aluminum sheet housing with satin coating to resist corrosion, discoloration, and scratching. For use in Dry Locations.

ELECTRICAL

Input voltages 120-277V with 0-10V Continuous Dimming. Tunable CCT (3500K, 4000K, 5000K) and Tunable Wattage (2x2, 20W, 25W, 30W) or (2x4, 30W, 35W, 42W). Operating temperatures -4°F to 104°F (-20°C to 40°C).

MOUNTING

Recessed T-Bar Ceiling Mount.

OPTICS

Anti-UV Frosted Polycarbonate Lens.

LISTINGS

DLC Premium listed. UL certified to meet US and Canadian standards. FCC, CE and RoHS compliant.

WARRANTY

7 year exclusive limited warranty.

SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V

Input Frequency: 50/60 Hz

Wattage: Select (20W, 25W, 30W), Select (30W, 35W,

42W) **Power Factor:** >0.9

Total Harmonic Distortion (THD): <10%

Operating Temperature: -4°F to 104°F (-20°C to 40°C)

LIGHTING DATA

Lumens: Select [2600 (20W), 3250 (25W), 3900 (30W)] or Select [3900 (30W), 4550 (35W), 5460 (42W)]

Lumens Per Watt: 130 lm/W

Color Correlated Temperature (CCT): Select (3500K, 4000K, 5000K)

Dimmable: 0-10V

Color Rendering Index (CRI): >80


L70: 75000 hours



FEATURES

Lumen Output	2600 to 5460 lumens
Efficacy	130 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	Select (3500K, 4000K, 5000K)
Size	2x2, 2x4
Warranty	7 Years

TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

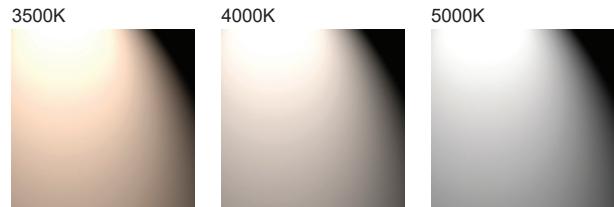

PART NUMBERS

TSQ22	TSQ Color Tunable Troffer 2x2 Panel
TSQ24	TSQ Color Tunable Troffer 2x4 Panel