

Retrofit Styles



SPECIFICATIONS

Voltage*	24V / 120V / 277V / 480 VAC
Wattage	40W / 60W
Color Temp	3000 / 5000 Kelvin
Housing	Coated copper free aluminum alloy
Color	Dark Gray
Lens	Tempered Glass
Lifetime	60,000 hrs L70
CRI	≥ 80 (3000K) / ≥70 (5000K)
Beam Angles	X-110° / Y-110°
Power Factor	cos ≥ 0.9, cos ≥ 0.87 (480vAC)
Protection	IP67 / NEMA 6
Dimming	None Dimming
Warranty	5 Year Limited Warranty

Project:	
Type:	
Catalog # :	

FME Lighting | 877 - 234 - 8460 | info@fmelighting.com

CERTIFICATIONS / RATINGS



CLASS / DIVISION

- Class I, Div 2, Groups A, B, C, D • Class III
- Class II, Div 2, Groups F, G

KEY FEATURES AND BENEFITS

- Retrofit series, facilitating easy replacement of competitors fixtures.
- Designed for use environments such as oil refineries, painting facilities, and natural gas transportation.
- Compliant with a range of protection standards including UL 844, UL 1598 Luminaries, UL 8750 and more.
- 3/4" NPT pendant hub standard.
- IP67 rating.



CLASS / DIVISION / TEMPERATURE

Models	Class/ Division	Ambient Temperature	T-Rating	IP Rating
KELT	Class I Division 2 Groups A, B, C, D	-40°C ~ +40°C (-40°F ~ +104°F)	T3C	IP67
	Class II Division 2 Groups E, F, G	+40°C (+104°F)	T4	IP67
	Class III	N/A	N/A	IP67

VOLTAGE TYPE* (AMPS)

	40W	60W
KEL-COB	24V: 1.67A, 120V: 0.33A, 277V: 0.14A, 480V: 0.08A	24V: 2.50A, 120V: 0.50A, 277V: 0.22A, 480V: 0.13A
KEL-DOB	120V: 0.33A, 277V: 0.14A	120V: 0.50A, 277V: 0.22A
KEL-SMD	20V: 0.33A, 277V: 0.14A	120V: 0.50A, 277V: 0.22A

(Watts of 24V are different, please contact us for details.)


LUMENS

Kelvin	40W	60W
3000K	3800	5700
5000K	4000	6000

MOUNTING OPTIONS


WM - Wall Mount

5.0 kg (11.0 lb)

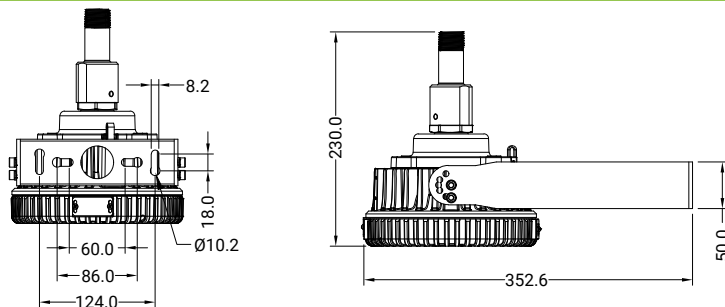


PM - Pedant Mount

5.0 kg (11.0 lb)

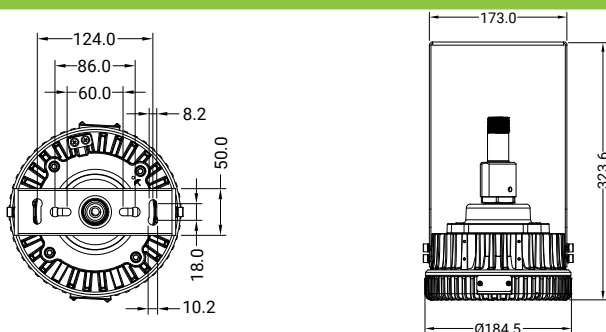

SE - Straight Electrical Tube




4.5 kg (9.9 lb)

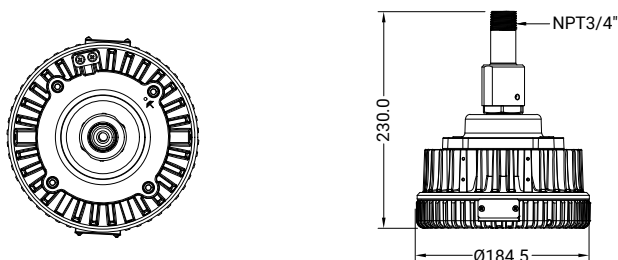

WEIGHTS AND DIMENSIONS



Configuration	lbs
Net Weight	9.9 lb (4.5 kg)

Dimension in Millimeters (inches)

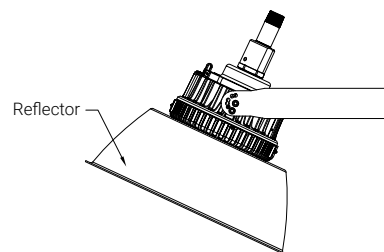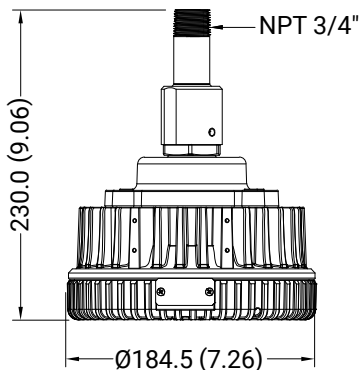


Mounting Box Option & Dimensions (All in mm)

PNC - Retrofit Kit for Crouse





Installation Diagram




5.5 kg (12.1 lb)

*Top hat is not included when,
placing order for retrofit pan.

PNA - Retrofit Kit for Appleton



Installation Diagram


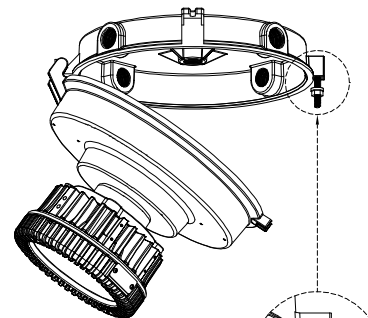


Screws and Nuts
are not provided.


5.8 kg (12.8 lb)

*Top hat is not included when,
placing order for retrofit pan.

PNK - Retrofit Kit for Killark/Hubbell

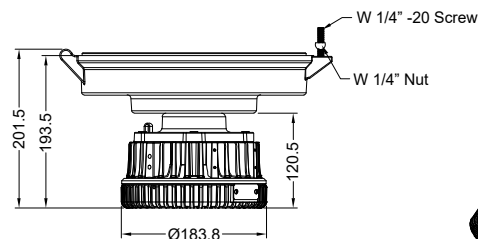

Installation Diagram




*Top hat is not included when,
placing order for retrofit pan.


6.0 kg (13.2 lb)

OPTICS REPORT LIGHT DISTRIBUTION

Polar Luminous & Intensity Distribution

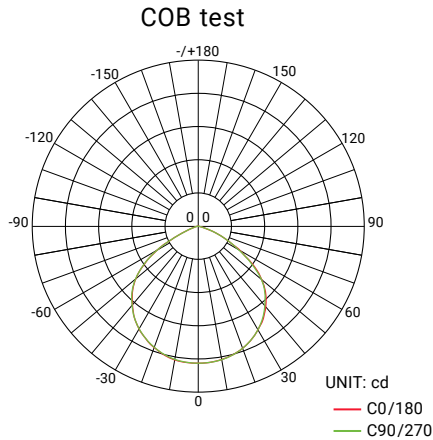

Luminous & Intensity Distribution Diagram

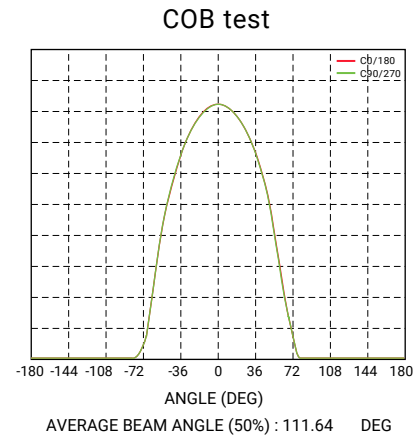

LUMENS

Kelvin	40W	60W
3000K	3800	5700
5000K	4000	6000

ORDERING INFORMATION

ORDERING GUIDE

Series	Wattage	Voltage**	CCT	Mounting*	Accessory
KEL	4 = 40W 6 = 60W	COB DOB SMD **Read Chart	S = 3000K C = 5000K	WM = Wall Mount PM = Pedant Mount SE = Straight Electrical Tube PNC = Mounting Box - Crouse PNA = Mounting Box - Appleton PNK = Mounting Box - Hubbell/Krillark PNH = Mounting Box - Holophane PND = Mounting Box - Dialight	JB = Junction Box NPT = 3/4" NPT: Pedant Standard 1RH = Reflective Hood

* Prior to ordering, we suggest you try our sample mounting box, to ensure compatibility

** See Voltage Chart

VOLTAGE TYPE (AMPS)

	40W	60W
KEL-COB	24V: 1.67A, 120V: 0.33A, 277V: 0.14A, 480V: 0.08A	24V: 2.50A, 120V: 0.50A, 277V: 0.22A, 480V: 0.13A
KEL-DOB	120V: 0.33A, 277V: 0.14A	120V: 0.50A, 277V: 0.22A
KEL-SMD	20V: 0.33A, 277V: 0.14A	120V: 0.50A, 277V: 0.22A

(Watts of 24V are different, please contact us for details.)



KEY FEATURES AND BENEFITS

The OPEB series junction box intend to be used or explosive atmospheres. For general wiring in hazardous locations. Copper free aluminum enclosure.

- Ex d type flameproof enclosure.
- Four types of enclosures available.
- The degree of protection is IP66.

SPECIFICATIONS

Model	Terminal Spec
OPEB	2.5mm ² / 24A
	2.5mm ² / 24A
	4mm ² / 27A

Number of Terminal Block	Cable Entry Spec	Cable Entry Amount
Max. 4	¾" NPT / M25x1.5	Max.5

Certification For OPEB Series Junction Box	• Class I, Division 1, Groups A, B, C and D
	• Class I, Division 2, Groups A, B, C and D
	• Class II, Division 1, Groups E, F and G
	• Class II, Division 2, Groups F and G
	• Class III

Rated Voltage	Max.800VAC
Rated Current	24A, 32A, 41A

Ambient Temperature	• Type A, B, C, D, E, F: Threaded joints
	• Type KB1: Flanged and threaded joints

DIMENSIONS

