

Project:	
Type:	
Catalog #:	



18W LED Vaportite Light

FEATURES

- UL1598 Wet location approved.
- Mounting options include ceiling and wall mount fixtures.
- Available finish colors include bronze, black, gray or white.
- Frosted glass globe distributes light evenly without any LED brightness or glare.
- Triac Dimming
- UL and NEMA 4X certified

SPECIFICATIONS


Performance

Watts	18 W
LED Chip	Samsung
Driver	
Lumens	1865 lm
LPW	108.22 lm/W
Input Voltage	120V Only
CCT	2700K/3000K/4000K/5000K or Selectable
CRI	≥ 80
Power Factor	≥ 0.9
Beam Angle	97.3°
THD	≤ 20%


Physical

Housing	Die cast aluminum
Finish	Powder coat finish in bronze, black, gray or white
Globe	Frosted glass - flat

DIMENSIONS

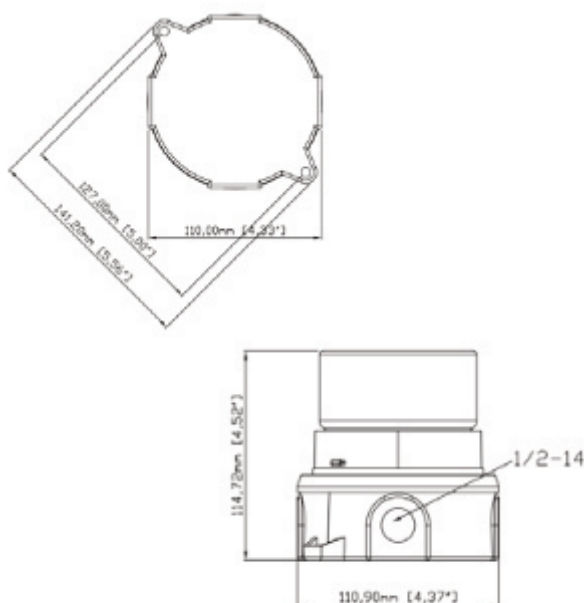

LIGHT DISTRIBUTION

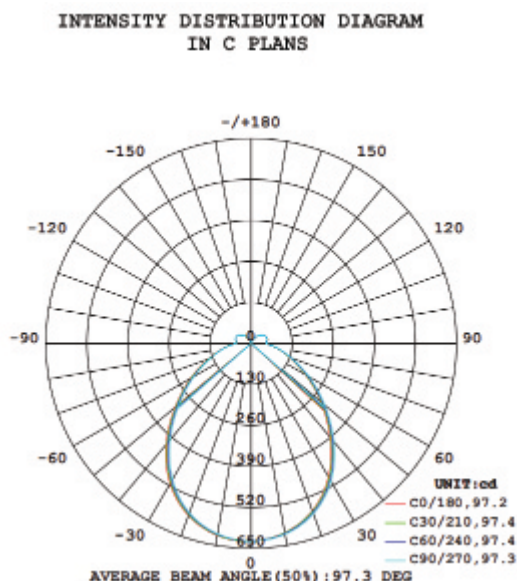

Project:	
Type:	
Catalog #:	



18W LED Vaportite Light

FEATURES


- UL1598 Wet location approved.
- Mounting options include ceiling and wall mount fixtures.
- Color options include standard bronze, black, gray or white.
- Frosted glass globe distributes light evenly without any LED brightness or glare.
- Triac Dimming
- UL and NEMA 4X certified
- Cage is optional

SPECIFICATIONS


Performance	
Watts	18 W
LED Chip	Samsung
Driver	
Lumens	1573 lm
LPW	95.05 lm/W
Input Voltage	120V Only
CCT	2700K/3000K/4000K/5000K or Selectable
CRI	≥ 80
Power Factor	≥ 0.9
Beam Angle	100.5°
THD	≤ 20%

Physical	
Housing	Die cast aluminum
Finish	Powder coat finish in bronze, black, gray or white)
Globe	Frosted glass - flat
Cage	Steel wireguard


DIMENSIONS

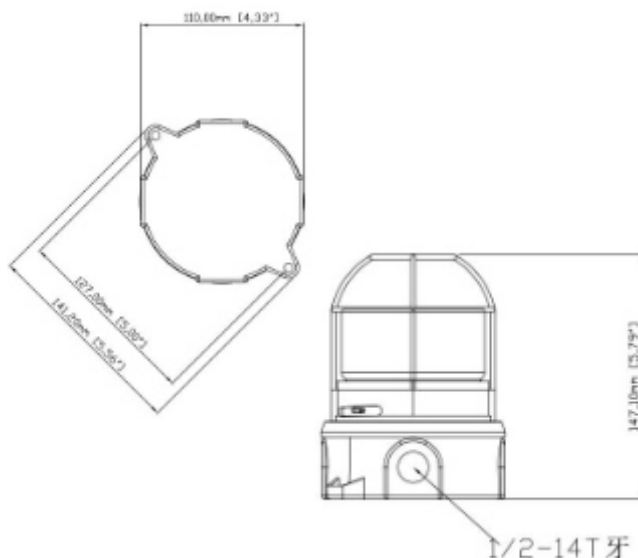

LIGHT DISTRIBUTION

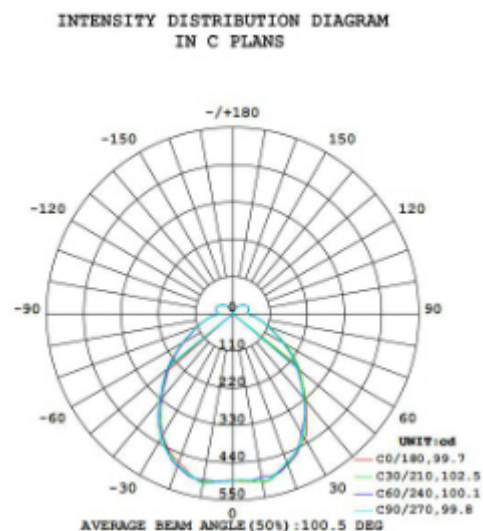

Ordering Information

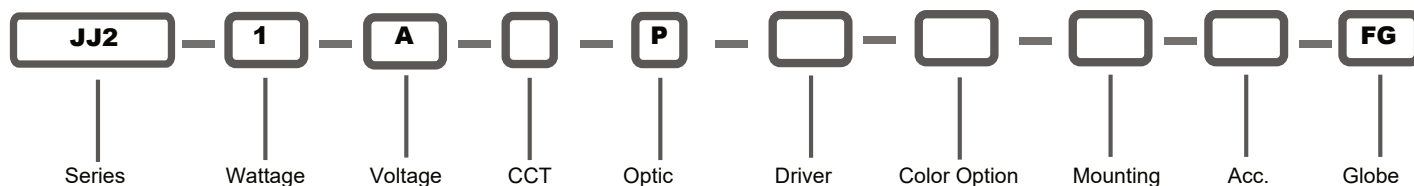

SERIES	WATTAGE	VOLTAGE	COLOR TEMP	OPTIC	DRIVER	COLOR OPTION
JJ2	1 = 18W	A = AC100-277V	A = 2700K S = 3000K I = 4000K C = 5000K D = Selectable	P = 120°	ND = No Dimming D = Dimming	BR = Bronze B = Black G = Gray W = White

MOUNTING

WM = Wall Mount
CM = Ceiling Mount

ACCESSORIES

NC = No Cage
C = Cage

GLOBE

FG = Frosted Glass - Flat

⚠ Minimum order quantity: 10 pieces