

# LEUK (LEU) Series

High Output Remote Capable Head



Project:	
Type:	
Catalog # :	

FME Lighting | 877 - 234 - 8460 | info@fmelighting.com



**NEMA 4X**





## SPECIFICATIONS

VOLTAGE	12VDC / 24VDC
WATTAGE / LUMEN OUTPUT	Single or dual head configuration • 5W = 653lm      • 14W = 1,487lm • 9W = 1,125lm   • 30W = 2,578lm
OPERATING TEMP	-30°C to 40°C (-22°F to 104°F)
HOUSING	Corrosion-resistant cast aluminum / black finish (other finishes limited; contact factory)
LENS	Impact-resistant acrylic (resists yellowing)
MOUNTING OPTIONS	Adjustable stainless steel swivel
PROTECTION	NEMA 4X rated; fully gasketed for wet and dust-filled environments
WARRANTY	5 Year Limited Warranty





## DIMENSIONS

### Single Head

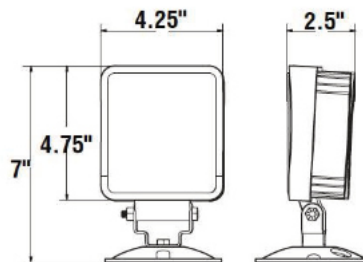

### Double Head

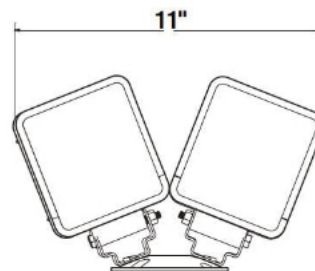

## ELECTRICAL RATING

Head	Voltage (V)	Rated Current (A)	Max Wattage (W)
LEJ	12V	2.25	30
	24V	1.125	

## ORDERING INFORMATION

### ORDERING GUIDE

Series	Heads	Wattage	Voltage	Options
LEU	1 = Single 2 = Double	5 = 5W 9 = 9W 14 = 14W 30 = 30W	DC = 12-24V	LC = less canopy



877- 234 - 8460 | info@fmelighting.com

Specifications and dimensions subject to change without notice.