

Project:	
Type:	
Catalog # :	

FME Lighting | 877 - 234 - 8460 | info@fmelighting.com



IP66



SPECIFICATIONS

ILLUMINATION

- Two fully adjustable, ultra bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.

ELECTRICAL

- Powered from low voltage 6V/12V DC power source with low voltage wiring (not provided).

HOUSING

- Housing is fiberglass reinforced construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.

MOUNTING

- Die-cast mounting brackets provided for surface wall-mount installation.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.


OPTIONS

- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

CERTIFICATIONS

- Rated for Class 1, Division 2, Groups A, B, C, and D.
- UL listed
- IP66 rated for Ingress protection.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA,
- Local and State Codes.
- Five year warranty.

DIMENSIONS

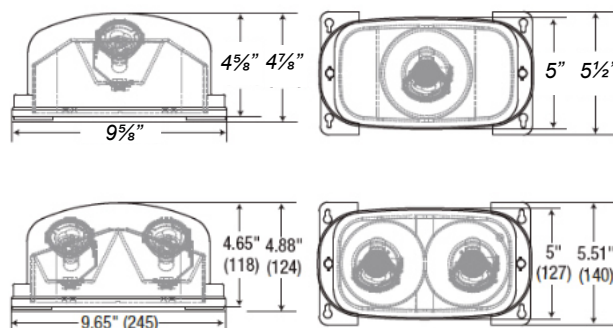

FIXTURE COMPATIBILITY CHART

Reference individual unit equipment specification sheets for remote load capacity availability.

MODEL TYPE	
YUM-C	XPESC
YUM	TUC
HEL	& More!

ORDERING INFORMATION

ORDERING GUIDE

Series	Heads	Color	Options
LHER	1 = Single 2 = Twin	G = Gray	TP = Tamper-Proof