

SEDONA-F (SED-F) Series

Compact Thermoplastic Exit Sign
Red/Green Field Selectable



Project:	
Type:	
Catalog # :	

FME Lighting | 877 - 234 - 8460 | info@fmelighting.com



SPECIFICATIONS

ILLUMINATION

- Ultra bright, energy efficient, long life field selectable Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
SED-F-RED/GREEN EM	1.0	1.0	0.1	0.1


CERTIFICATIONS

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

OPTIONS

- 2C-120V/2C-277V:** Voltage-specific Dual Circuit Option on the AC-Only unit enables it to be connected to two different power supplies at the same time.
- BAA:** Substantial transformation assembly in the U.S. complies with "Assembled in USA" under the Buy American Act.

DIMENSIONS

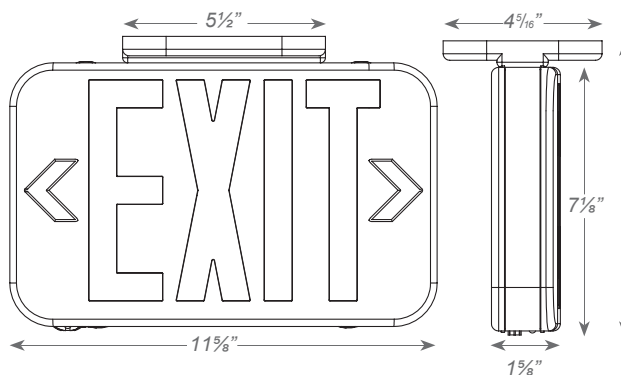

ORDERING INFORMATION

ORDERING GUIDE

Series	No. Of Faces	Letter Color	Housing	Battery	Options
SED-F	2 = Universal Single/ Double Face	V = Red/Green (Field Selectable)	W = White B = Black	AC = AC-Only EM = Battery Backup	BAA = Assembled in the USA 2C-120 = Dual Circuit with 120V ¹ 2C-277 = Dual Circuit with 277V ¹

* Special voltage & SALIDA face plate options available. Contact Factory.

1 - Available only with AC units



877- 234 - 8460 | info@fmelighting.com

Specifications and dimensions subject to change without notice.