

Project:	
Type:	
Catalog #:	

STANDARD



The premium-performance, ultra-thin, edge-lit LED panel (APM2X4-35W-PCO) series offers industry-leading lumens watt (LPW). It is designed to deliver general ambient lighting in a variety of indoor settings, including schools, offices, hospitals and stores, and is the perfect choice for both new construction and retrofits. This high-efficacy luminaire provides long-life and uniform illumination, as well as standard 0-10 vdc dimming capability.

FEATURES

- Available in 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white) and 5000k (cool white) color temperatures.*
- Long-life LEDs provide 188,000 hours of operation with at least 70% of initial lumen output (L_{70}).**
- Provides 4,505 luminaire lumens (129 lumens per watt, LPW) at 3000k; 4,610 luminaire lumens (132 LPW) at 3500k; 4,715 luminaire lumens (135 LPW) at 4000k, and 4,924 luminaire lumens (141 LPW) at 5000k.*
- Uniform illumination with no visible LED pixilation.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- 0-10vdc dimming capability is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Aluminum housing.
- PMMA (polymethyl methacrylate) light guide panels for optimal light distribution, efficiency and longevity.
- Easy installation in new construction or retrofit.
- Standard earthquake clips provide secure installation in grid ceilings.
- Standard mounting options include recessed mounting in grid ceilings, or suspended mounting using attached hanging brackets. For mounting in plaster or other hard ceiling, see Mounting Kits.

* Contact factory for other color temperatures and lumen packages.

** L_{70} hours are IES TM-21-11 calculated hours.




WARRANTY & LISTINGS

- cETLus listed for damp locations and insulated ceilings (IC-rated) for use in ambient temperatures from -25°C to 45°C (-13°F to 113°F).
- DLC premium approved.
- Flicker-free per IEEE1789-2015 (no observable adverse effects of flicker at 100% light output level).
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- Complies with FCC Part 15, part B.
- Complies with IEEE C.62.41, input transient protection (1kV).
- 5-year warranty of all electronics and housing.

MOUNTING KITS

- Optional surface mounting kits (LEDSMKT-24), and flange mounting kits (FLANGEKIT24-ET) provide for installation on plaster or other hard ceilings.
- Optional cable mounting kits (LEDPNL-CMK) provide additional security, as well as suspended mounting.

DIMENSIONS

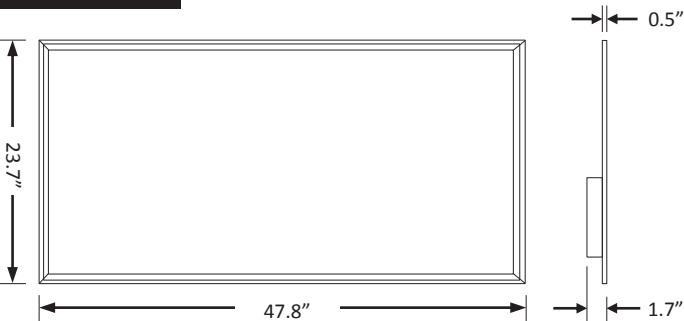

Weight: 11.5 lbs.

ORDERING INFORMATION

Example: APM2X4-35W-3KMV-PCO + LEDSMKT-24 + LEDPNL-EMBRKT

Model	Luminaire Watts	Luminaire Lumens	Lumens/Watt	Color Temperature	Input Voltage	Accessories (Order Separately)
APM2X4-35W	35	4,505 4,610 4,715 4,924	129 132 135 141	3K = 3000k 35K = 3500K 4K = 4000k 5K = 5000k	MV-PRM-ECO = Multi-volt (120-277V)	LEDSMKT-24 = Surface Mounting Kit (2x4) FLANGEKIT24-ET = Flange Mounting Kit (2x4) LEDPNL-CMK = Cable Mounting Kit, Quantity 6, 1 meter long, 1/16" diameter, with spring clips & adjustable locking ceiling attachment LEDPNL-EMBRKT = Bracket for emergency battery backup unit

ELECTRICAL DATA

Model	Color Temp.	CRI ¹	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input Voltage ²	Input Current (A)			Power Factor	THD ³	L ₇₀ Hours ⁴
							120V	240V	277V			
APM2X4-35W-3K MV-PCO	3000k	> 80	4,505	35	129	120-277	0.29	0.15	0.13	> 0.90	< 20%	188,000
APM-2X4-35W-35KV-PCO	3500k	> 80	4,610	35	132	120-277	0.29	0.15	0.13	> 0.90	< 20%	188,000
APM2X4-35W-4K MV-PCO	4000k	> 80	4,715	35	135	120-277	0.29	0.15	0.13	> 0.90	< 20%	188,000
APM2X4-35W-5K MV-PCO	5000k	> 80	4,924	35	141	120-277	0.29	0.15	0.13	> 0.90	< 20%	188,000

¹ Color rendering index.


² All 50-60Hz.

³ Total harmonic distortion.

⁴ L₇₀ refers to the number of hours at which lumen output declines to 70% of the initial level. L₇₀ hours are IES TM-21-11 calculated hours.

PHOTOMETRIC DATA

APM2X4-35W-5K MV-PCO (4,924 Lumens)

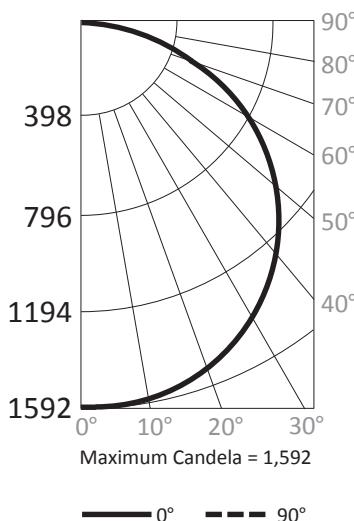


Candlepower Summary

	0°	90°
0°	1,592	1,592
10°	1,565	1,562
20°	1,500	1,486
30°	1,396	1,362
40°	1,251	1,191
50°	1,058	977
60°	815	723
70°	529	443
80°	219	166
90°	0	0

Zonal Lumen Summary





Zone	Lumens	% Fixture
0° - 10°	151	3.1%
0° - 20°	587	11.9%
0° - 30°	1,258	25.5%
0° - 40°	2,085	42.3%
0° - 50°	2,969	60.3%
0° - 60°	3,792	77.0%
0° - 70°	4,439	90.1%
0° - 80°	4,818	97.8%
0° - 90°	4,924	100.0%
90° - 180°	0	0.0%
0° - 180°	4,924	100.0%

Cone of Light

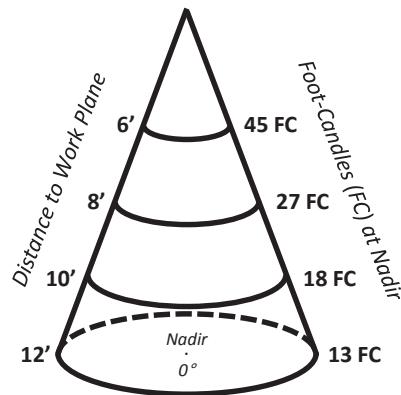


OPTIONS

- Optional surface mounting kits (LEDSMKT-24) mounts below the ceiling.
- Optional flange mounting kits provide for recessed installation on plaster or other hard ceilings. Attach Flange Mount Kit (FLANGEKIT24-ET) to ceiling joists or other stationary structures, and the panel is mounted flush to the ceiling.
- Optional cable mounting kits provide additional security, as well as suspended mounting. Attach one end of the Cable Mount Kit (LEDPNL-CMK) to luminaire earthquake clips using spring clips, and attach the other end to stationary structures using the adjustable, locking ceiling attachment (see picture below right).
- Optional bracket for emergency battery backup unit (LEDPNL-EMBRKT) provides structural support to prevent panels from bending when the battery backups are installed.

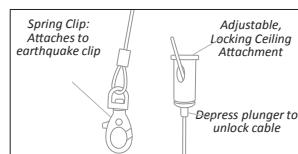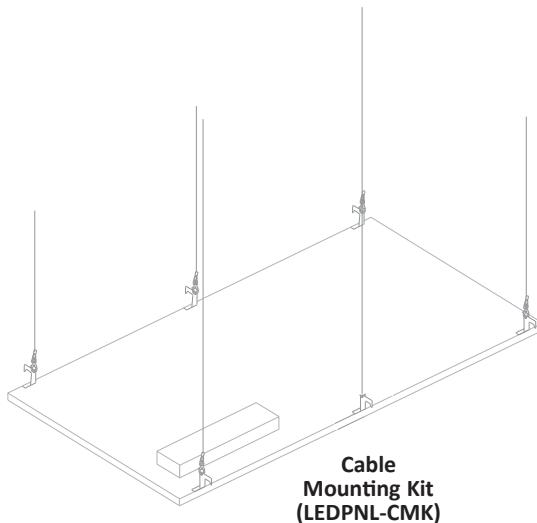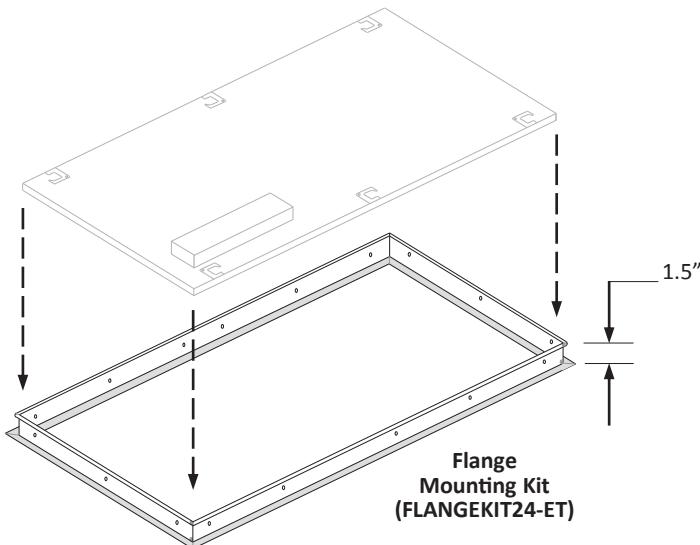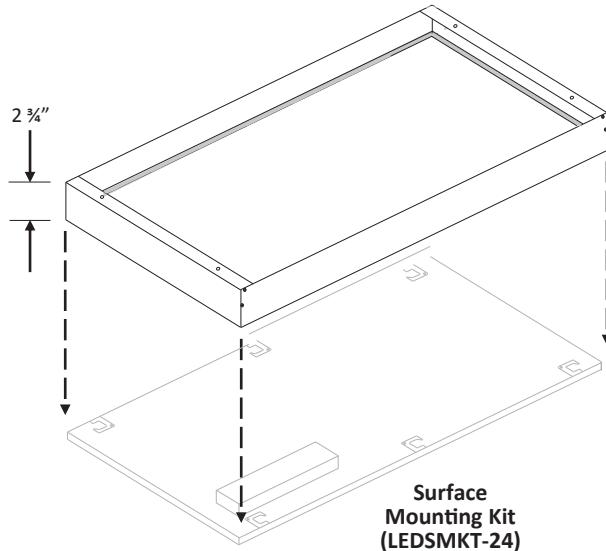

Cable Mount Kit:

- Spring Clip
- Adjustable, locking ceiling attachment

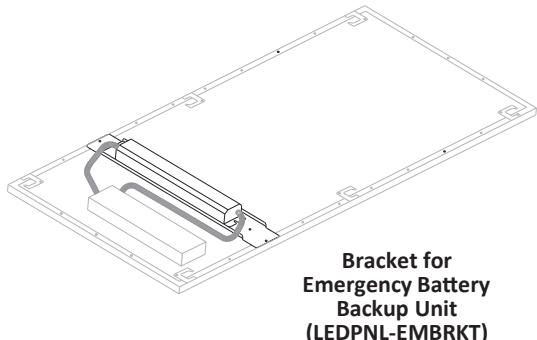

Bracket for
Emergency Battery
Backup Unit
(LEDPNL-EMBRKT)