

Project:	
Type:	
Catalog #:	

**STANDARD**

The CCMLED22-40W-CP is a low-profile, 2' x 2' LED center basket luminaire, which is designed as a direct replacement for 2' x 2' fluorescent luminaires installed in grid or plaster ceilings. It is designed to deliver general ambient lighting in a variety of indoor settings, including schools, offices, hospitals and stores, and is the perfect choice for both new construction and retrofits. This high-efficacy luminaire provides long-life and uniform illumination, as well as standard 0-10vdc dimming capability.

FEATURES

- Available in 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white) & 5000k (cool white) color temperatures.*
- Long-life LEDs provide 68,000 hours of operation with at least 70% of initial lumen output (L_{70}).**
- Provides 4,159 luminaire lumens (99 lumens per watt, LPW) at 3000k; 4,263 luminaire lumens (102 LPW) at 3500k; 4,365 luminaire lumens (104 LPW) at 4000k; and 4,576 luminaire lumens (109 LPW) at 5000k.*
- Uniform illumination with no visible LED pixelation.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- 0-10vdc dimming capability is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Steel housing and polycarbonate lens.
- Easy installation in new construction or retrofit. Fits in standard 2' x 2' grid ceilings.
- Standard earthquake clips provide secure installation in grid ceilings.
- Standard mounting options include recessed mounting in grid ceilings, or suspended mounting using attached hanging brackets. For other mounting options, see Mounting Kits.

* Contact factory for other color temperatures and lumen packages.


** L_{70} hours are IES TM-21-11 calculated hours.

WARRANTY & LISTINGS



- UL listed for damp locations and insulated ceilings (IC-rated) for use in ambient temperatures from -20°C to 40°C (-4°F to 104°F).
- DLC Standard listed.
- Flicker-free per IEEE1789-2015 (low risk of adverse effects of flicker at 100% light output level).
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- Complies with FCC Part 15, part B.
- Complies with IEEE C.62.41-1991, input transient surge protection (2kV).
- 5-year warranty of all electronics and housing.

MOUNTING KITS

- Optional Surface Mount Kits (LEDSMKT-22) provide for installation on plaster or other hard ceilings.



- Flange Mount Kit (FLANGEKIT22-ET) mounts above plaster or other hard ceilings, and the center basket is mounted flush to the ceiling.

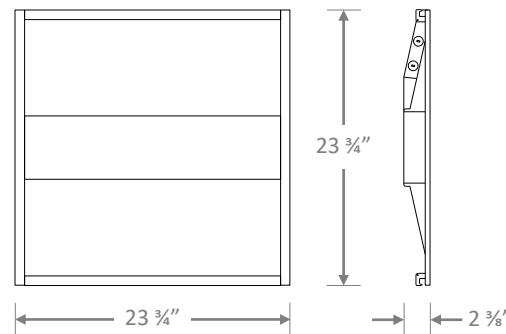**DIMENSIONS**

Weight: 6.2 lbs.

ORDERING INFORMATION

Example: CCMLED22-40W-3KMV-CP + FLANGEKIT22-ET + LEDPNL-CMK

Model	Luminaire Watts	Luminaire Lumens	Lumens/Watt	Color Temperature	Input Voltage	Options (Order Separately)
CCMLED22-40W	42	4,159 4,263 4,365 4,576	99 102 104 109	3K = 3000k 35K = 3500K 4K = 4000k 5K = 5000k	MV-CP= Multi-volt (120-277V)	LEDSMKT-22 = Surface Mounting Kit for 2x2 FLANGEKIT22-ET = Flange Mounting Kit for 2x2 LEDPNL-CMK = Cable Mounting Kit, Quantity 6, 1 meter long, 1/16" diameter, with spring clips & adjustable, locking ceiling attachment

ELECTRICAL DATA

Model	Color Temp.	CRI ¹	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input ² Voltage	Input Current (A)			Power Factor	THD ³	L ₇₀ Hours ⁴
							120V	240V	277V			
CCMLED22-40W-3KMV-CP	3000k	> 80	4,159	42	99	120-277	0.35	0.18	0.15	> 90%	< 20%	68,000
CCMLED22-40W-35KMV-CP	3500k	> 80	4,263	42	102	120-277	0.35	0.18	0.15	> 90%	< 20%	68,000
CCMLED22-40W-4KMV-CP	4000k	> 80	4,365	42	104	120-277	0.35	0.18	0.15	> 90%	< 20%	68,000
CCMLED22-40W-5KMV-CP	5000k	> 80	4,576	42	109	120-277	0.35	0.18	0.15	> 90%	< 20%	68,000

¹ Color rendering index.


² All 50-60Hz.

³ Total harmonic distortion.

⁴ L₇₀ refers to the number of hours at which lumen output declines to 70% of the initial level. L₇₀ hours are IES TM-21-11 calculated hours.

PHOTOMETRIC DATA

CCMLED22-40W-3KMV-CP (4,159 Lumens)

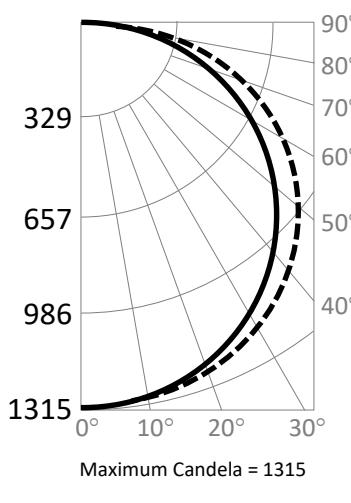


Candlepower Summary	
	0° 90°
0°	1,310 1,310
10°	1,304 1,286
20°	1,250 1,228
30°	1,151 1,140
40°	1,010 1,029
50°	831 896
60°	622 740
70°	390 585
80°	161 254
90°	2 3
	90° - 180° 7
	0° - 180° 4,159
	100.0%

Zonal Lumen Summary





Zone	Lumens	% Fixture
0° - 10°	124	3.0%
0° - 20°	482	11.6%
0° - 30°	1,029	24.7%
0° - 40°	1,699	40.9%
0° - 50°	2,415	58.1%
0° - 60°	3,096	74.4%
0° - 70°	3,670	88.2%
0° - 80°	4,054	97.5%
0° - 90°	4,152	99.8%
90° - 180°	7	0.2%
0° - 180°	4,159	100.0%

Cone of Light

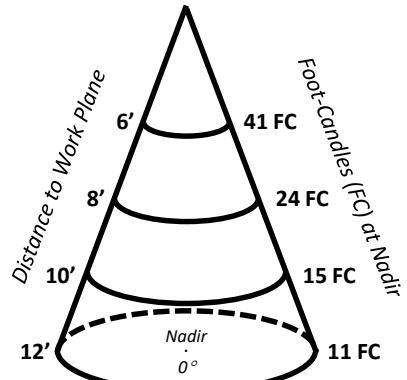

MOUNTING KITS

- Optional Surface Mounting Kit (LEDSMKT-22) mounts below the ceiling.
- Optional Flange Mount Kit provides for recessed installation on plaster or other hard ceilings. Attach Flange Mount Kit (FLANGEKIT22-ET) to ceiling joists or other stationary structures, and the panel is mounted flush to the ceiling.
- Optional Cable Mount Kit provides additional security, as well as suspended mounting. Attach one end of the Cable Mount Kit (LEDPNL-CMK) to luminaire earthquake clips using spring clips, and attach the other end to stationary structures using the adjustable, locking ceiling attachment (see picture below right).

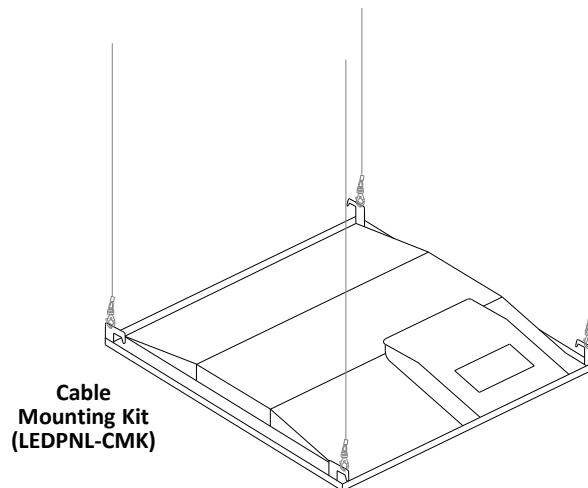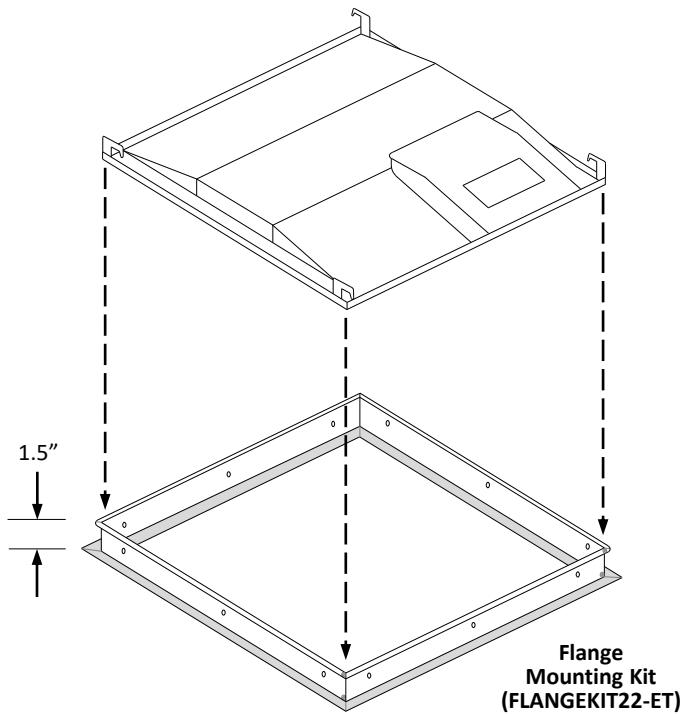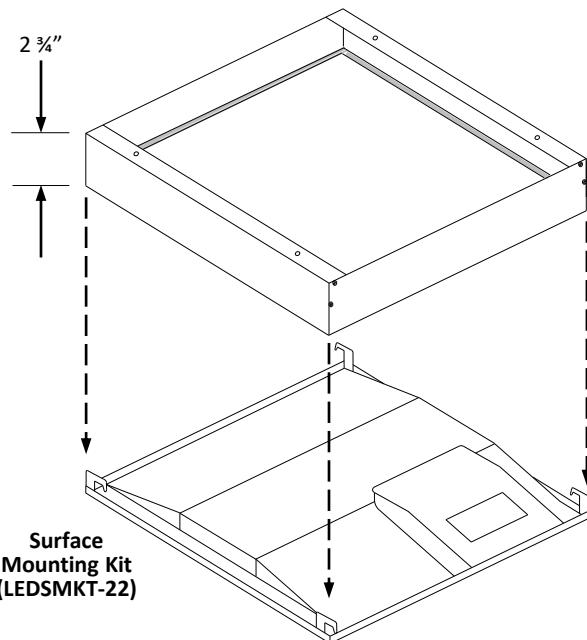

Cable Mount Kit:

- Spring Clip
- Adjustable, locking ceiling attachment