

Project:	
Type:	
Catalog #:	



STANDARD



The premium-performance CCMLED24-40W-PRM-CP is a low-profile 2' x 4' LED center basket luminaire, which offers industry-leading lumens per watt (LPW). The CCMLED24-40W-PRM-CP is designed as a direct replacement for 2' x 4' fluorescent luminaires installed in grid or plaster ceilings. It is designed to deliver general ambient lighting in a variety of indoor settings, including schools, offices, hospitals and stores, and is the perfect choice for both new construction and retrofits. This high-efficacy luminaire provides long-life and uniform illumination, as well as standard 0-10vdc dimming capability.

FEATURES

- Available in 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white) & 5000k (cool white) color temperatures.*
- Long-life LEDs provide 199,000 hours of operation with at least 70% of initial lumen output (L_{70}).**
- Provides 5,680 luminaire lumens (129 lumens per watt, LPW) at 3000k; 5,743 luminaire lumens (131 LPW) at 3500k; 5,794 luminaire lumens (132 LPW) at 4000k; and 5,894 luminaire lumens (134 LPW) at 5000k.*
- Uniform illumination with no visible LED pixelation.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- 0-10vdc dimming capability is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Steel housing and polycarbonate lens.
- Easy installation in new construction or retrofit. Fits in standard 2' x 4' grid ceilings.
- Standard earthquake clips provide secure installation in grid ceilings.
- Standard mounting options include recessed mounting in grid ceilings, or suspended mounting using attached hanging brackets. For other mounting options, see Mounting Kits.

* Contact factory for other color temperatures and lumen packages.


** L_{70} hours are IES TM-21-11 calculated hours.

WARRANTY & LISTINGS


- UL listed for damp locations and insulated ceilings (IC-rated) for use in ambient temperatures from -20°C to 40°C (-4°F to 104°F).
- DLC Premium listed.
- Flicker-free per IEEE1789-2015 (low risk of adverse effects of flicker at 100% light output level).
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- Complies with FCC Part 15, part B.
- Complies with IEEE C.62.41-1991, input transient surge protection (2kV).
- 5-year warranty of all electronics and housing.

MOUNTING KITS


- Optional Surface Mount Kits (LEDSMKT-24) provide for installation on plaster or other hard ceilings.



- Flange Mount Kit (FLANGEKIT24-ET) mounts above plaster or other hard ceilings, and the center basket is mounted flush to the ceiling.



DIMENSIONS

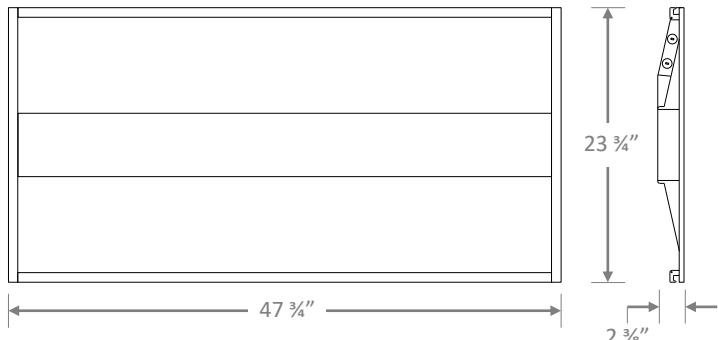

Weight: 12.8 lbs.

ORDERING INFORMATION

Example: CCMLED24-40W-3KMV-PRM-CP + FLANGEKIT24-ET + LEDPNL-CMK

Model	Luminaire Watts	Luminaire Lumens	Lumens/Watt	Color Temp.	Input Voltage	DLC Listing	Options (Order Separately)
CCMLED24-40W	44	5,680 5,743 5,794 5,894	129 131 132 134	3K = 3000k 35K = 3500K 4K = 4000k 5K = 5000k	MV = Multi-volt (120-277V)	PRM-CP = DLC Premium	LEDSMKT-24 = Surface Mounting Kit for 2x4 FLANGEKIT24-ET = Flange Mounting Kit for 2x4 LEDPNL-CMK = Cable Mounting Kit, Quantity 6, 1 meter long, 1/16" diameter, with spring clips & adjustable, locking ceiling attachment

ELECTRICAL DATA

Model	Color Temp.	CRI ¹	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input ² Voltage	Input Current (A)			Power Factor	THD ³	L ₇₀ Hours ⁴
							120V	240V	277V			
CCMLED24-40W-3K MV-PRM-CP	3000k	> 80	5,680	44	129	120-277	0.37	0.18	0.16	> 90%	< 20%	199,000
CCMLED24-40W-35K MV-PRM-CP	3500k	> 80	5,743	44	131	120-277	0.37	0.18	0.16	> 90%	< 20%	199,000
CCMLED24-40W-4K MV-PRM-CP	4000k	> 80	5,794	44	132	120-277	0.37	0.18	0.16	> 90%	< 20%	199,000
CCMLED24-40W-5K MV-PRM-CP	5000k	> 80	5,894	44	134	120-277	0.37	0.18	0.16	> 90%	< 20%	199,000

¹ Color rendering index.


² All 50-60Hz.

³ Total harmonic distortion.

⁴ L₇₀ refers to the number of hours at which lumen output declines to 70% of the initial level. L₇₀ hours are IES TM-21-11 calculated hours.

PHOTOMETRIC DATA

CCMLED24-40W-3K MV-PRM-CP (5,680 Lumens)

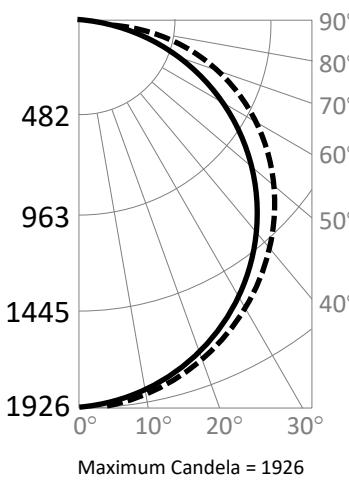


Candlepower Summary	
	0° 90°
0°	1,924 1,924
10°	1,882 1,888
20°	1,756 1,789
30°	1,559 1,635
40°	1,313 1,442
50°	1,032 1,231
60°	732 1,021
70°	430 801
80°	158 425
90°	1 2
90° - 180°	8
0° - 180°	5,680
	100.0%

Zonal Lumen Summary





Zone	Lumens	% Fixture
0° - 10°	182	3.2%
0° - 20°	700	12.3%
0° - 30°	1,481	26.1%
0° - 40°	2,414	42.5%
0° - 50°	3,380	59.5%
0° - 60°	4,273	75.2%
0° - 70°	5,014	88.3%
0° - 80°	5,526	97.3%
0° - 90°	5,672	99.9%
90° - 180°	8	0.1%
0° - 180°	5,680	100.0%

Cone of Light

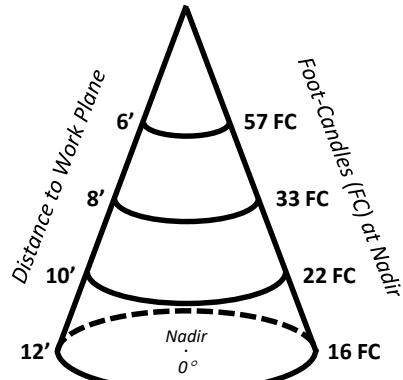

MOUNTING KITS

- Optional Surface Mounting Kit (LEDSMKT-24) mounts below the ceiling.
- Optional Flange Mount Kit provides for recessed installation on plaster or other hard ceilings. Attach Flange Mount Kit (FLANGEKIT24-ET) to ceiling joists or other stationary structures, and the panel is mounted flush to the ceiling.
- Optional Cable Mount Kit provides additional security, as well as suspended mounting. Attach one end of the Cable Mount Kit (LEDPNL-CMK) to luminaire earthquake clips using spring clips, and attach the other end to stationary structures using the adjustable, locking ceiling attachment (see picture below right).

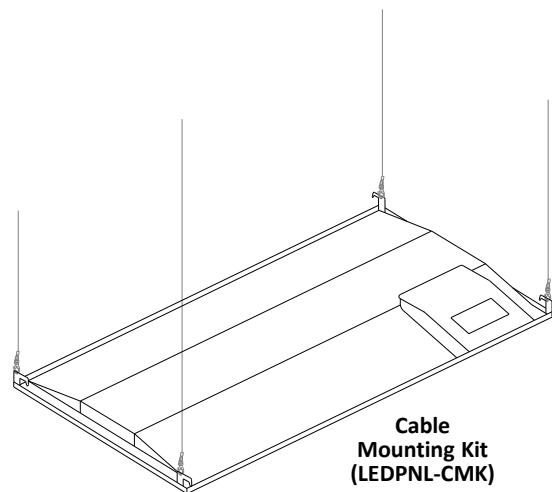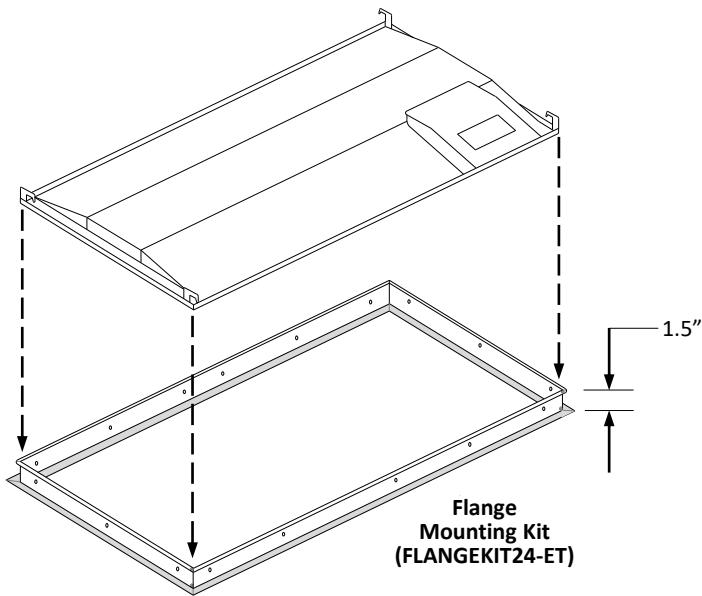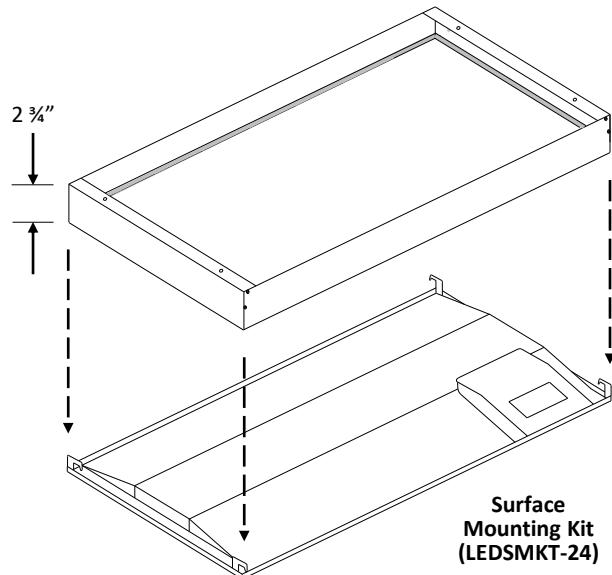

Cable Mount Kit:

- Spring Clip
- Adjustable, locking ceiling attachment