

Project:	
Type:	
Catalog #:	

STANDARD

The CCMLED22 is a 2' x 2' LED center basket luminaire, which is designed as a direct replacement for 2' x 2' fluorescent luminaires installed in grid ceilings. The CCMLED22 is designed to deliver general ambient lighting in a variety of indoor settings, including schools, offices, hospitals and stores, and is the perfect choice for both new construction and retrofits. This high-efficacy luminaire provides long-life and uniform illumination, as well as standard 0-10vdc dimming capability.

FEATURES


- Available in 4000k (neutral white) and 5000k (cool white) color temperatures.*
- Long-life LEDs provide 52,000 hours of operation with at least 70% of initial lumen output (L_{70}).**
- Provides 4,718 luminaire lumens (110 lumens per watt) at both 4000k and 5000k.*
- Uniform illumination with no visible LED pixelation.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- 0-10vdc dimming capability is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Steel housing and acrylic lens.
- Easy installation in new construction or retrofit. Housing fits in standard 2' x 2' grid ceilings.

* Contact factory for other color temperatures and lumen packages.

** L_{70} hours are IES TM-21-11 calculated hours.

**WARRANTY & LISTINGS**

- ETL approved for damp locations and to relevant U.L. standards (-30°C to 50°C / -22°F to 122°F).
- DLC approved.
- Complies with FCC Part 15, Class A.
- Complies with IEEE C.62.41-1991, Class A input transient surge protection (2.5kV).
- Complies with IEC 61000-4-2 level 2 (4kV) electrostatic discharge (ESD).
- 5-year warranty of all electronics and housing.

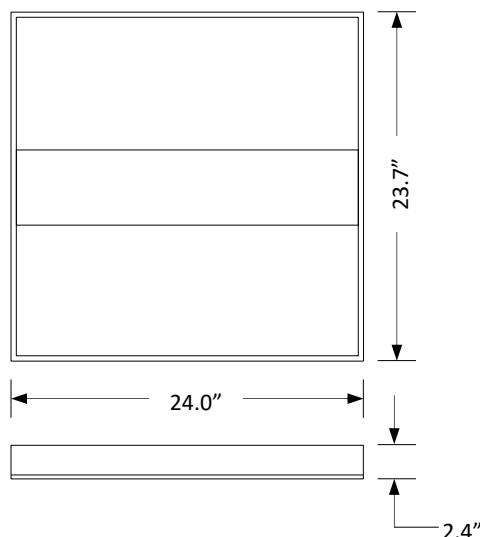DIMENSIONS**ORDERING INFORMATION**

Model	Color Temperature	Luminaire Lumens	Luminaire Watts	Lumens / Watt
CCMLED22-40D-4K MV	4000k	4,718	43	110
CCMLED22-40D-5K MV	5000k			

ELECTRICAL

Model	Color Temperature	CRI ¹	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input Voltage	Input Current (A)			Power Factor	THD ²	L ₇₀ Hours
							120V	240V	277V			
CCMLED22-40D-4K MV	4000k	> 80	4,718	43	110	120-277 (50-60Hz)	0.36	0.18	0.16	> 90%	< 20%	52,000
CCMLED22-40D-5K MV	5000k	> 80	4,718	43	100	120-277 (50-60Hz)	0.36	0.18	0.16	> 90%	< 20%	52,000


¹ Color rendering index

² Total harmonic distortion

³ L70 refers to the number of operation hours at which 70% of initial lumen output is reached.

PHOTOMETRIC DATA

Model: CCMLED22-40D-4K MV (4,718 lumens)

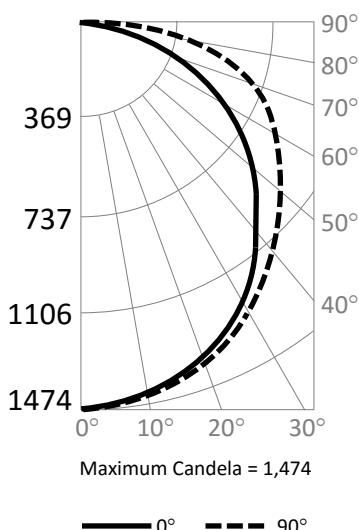

Candlepower Summary

	0°	90°
0°	1,474	1,474
10°	1,447	1,465
20°	1,362	1,417
30°	1,227	1,329
40°	1,051	1,205
50°	845	1,056
60°	618	902
70°	382	749
80°	157	500
90°	6	2
0° - 180°	4,718	100.0%

Zonal Lumen Summary

Zone	Lumens	% Fixture
0° - 10°	139	2.9%
0° - 20°	537	11.4%
0° - 30°	1,145	24.3%
0° - 40°	1,889	40.0%
0° - 50°	2,678	56.8%
0° - 60°	3,428	72.6%
0° - 70°	4,068	86.1%
0° - 80°	4,536	96.0%
0° - 90°	4,718	100.0%
0° - 180°	4,718	100.0%

Cone of Light

