


recessed **LIGHTING**

Standard non-IC downlighting

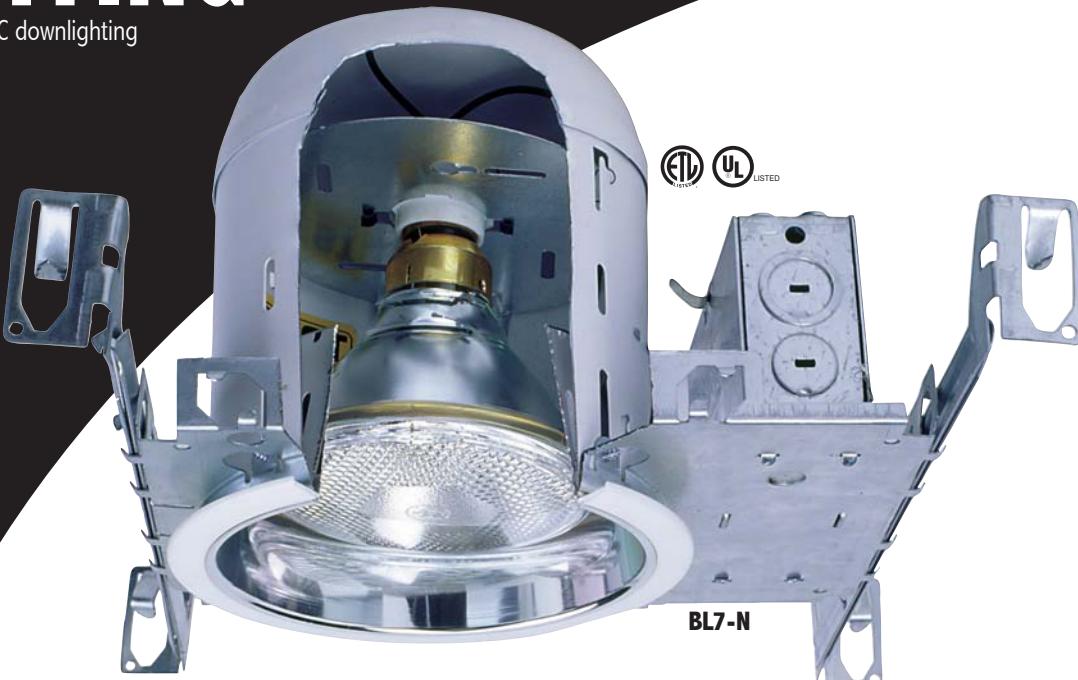

BL7-N

FBL7

FEATURES

FBL7N

6-1/2" W x 7-1/2" H

For new work applications

3-inch clearance of insulation required

Up to 150-watt lamp with proper trim

Thermally-protected

"Nailless" installation bar hangers

Integral T-bar installation slots

Oversized J-Box with 4 integral romex pry-outs with strain reliefs

Adjustable lamp height

UL listed for feed-through wiring and damp location



FBL7-R

FBL7R

6-1/2" W x 7-1/2" H

For old work or remodel applications

3-inch clearance of insulation required

Up to 150-watt lamp with proper trim

Thermally-protected

Oversized J-Box with 4 integral Romex pry-outs with strain reliefs

Adjustable lamp height

UL listed for feed-through wiring and damp location

When ordering, specify suffix:

"AT" for air-tight housing

"Q" for quick connector

"N" for nail hanger bars

FBL7 TRIMS

**FBL10**

Fresnel Lens

8" O.D.

60W/A19

**FBL14**

Open—white

8" O.D.

150W/R40 or PAR38

(Specify: PB for polished brass)

**FBL15**

Eyeball — white

8" O.D.

75W/R30 or PAR30

(Specify: PB for polished brass)

**FBL14SN**Open trim —
satin nickel

8" O.D.

150W/R40 or PAR38

**FBL15SN**

Eyeball — satin nickel

8" O.D.

75W/R30 or PAR30

**FBL18**

Black stepped baffle

7" O.D. wide ring

150W/R40 or PAR38

**FBL21**

Black stepped baffle

8" O.D. wide ring

75W/R30 or PAR30

**FBL22**

Wall wash black baffle

8" O.D.

75W/R30 or PAR30

**FBL23C**

Specular A-Lamp Reflector

7" O.D.

100W/A19

(Specify: G for gold)

**FBL25C**

Specular R-Lamp Reflector

7" O.D.

(Specify: G for gold)

**FBL30**

Black stepped baffle

w/regressed albalite

7" O.D.

40W/A19

**FBL31**

Black stepped baffle

7" O.D. w/regressed eyeball

75W/R30 or PAR30

(Specify: W for white baffle)

**FBL31SN**

Satin Nickel stepped baffle

7" O.D. w/regressed eyeball

75W/R30 or PAR30

**FBL35**

Air-tight clear reflector

7" O.D.

90W/R40 or PAR30

**FBL33BBA**

Specular A-Lamp Reflector

w/black baffle

8" O.D.

40W/A19

**FBL36**

White stepped baffle

7" O.D.

150W/R40 or PAR38

**FBL40**

Albalite shower

8" O.D.

40W/A19

(Specify: SN for satin nickel)

**FBL41**

Dropped oval shower

8" O.D.

60W/A19