

Project:	
Type:	
Catalog #:	

## BATTERY BACKUP FCXPU



### STANDARD



### AC ONLY FCA

### ILLUMINATION

- 130 volt long-life incandescent lamps for normal operation.
- 6-Volt, 5.4-Watt wedge base incandescent lamps for emergency operation (For CXPU model).

### ELECTRICAL

#### CA:

- 120 volt only.
- Charge rate/power "ON" LED indicator light.

#### CXPU:

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable Sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamps for minimum 90 minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.


### HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.
- Open face glass panel with silk-screened letters.
- Arrow configurations must be specified when ordered.

### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for two years. (FCXPU Model)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations.

### DIMENSIONS

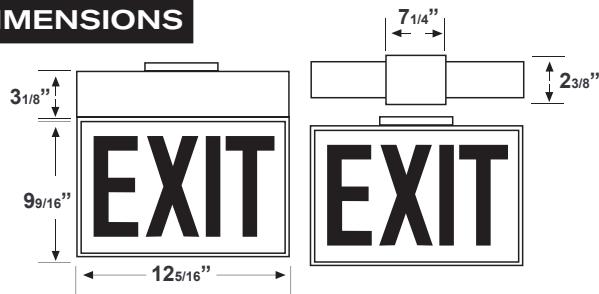

### ORDERING INFORMATION

Sample Part Number for FCA: **FCA-1-R-W-U-NA**  
Sample Part Number for FCXPU: **FCXPU-1-R-W-NA**

Model	No. of faces	Letter	Housing	-	Legend	Arrow configuration
FCA	1 Single Face	R Red	W White	U Universal	Blank Exit	NA No Arrow
FCXPU	2 Universal Single/ Double Face		B Black	Mount (Use only when ordering CA.)	S Stairs	DA Double Arrow LARA Left/Right Arrow* LA Left Arrow** RA Right Arrow**

\*For Double face units, that need to point in the same direction (left/right) from both sides.

\*\*For Single face units only.

Project:	
Type:	
Catalog #:	

## ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
FCA	24	N/A	0.2	N/A
FCXPU	26	26	0.24	0.24

## ARROW CONFIGURATION

