

Project:	
Type:	
Catalog #:	



STANDARD



ILLUMINATION

- Two fully adjustable ultra-bright, 12W bi-pin halogen par-36 type lamp heads.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free rechargeable Sealed lead calcium battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.


HOUSING

- Durable 20-gauge steel construction in neutral white finish.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed.

DIMENSIONS

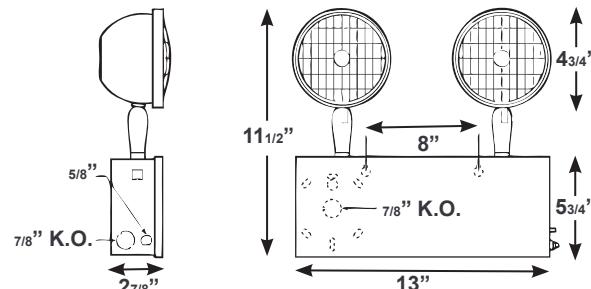

ORDERING INFORMATION

Sample Part Number: **FCA26S10**

Model	Housing	
FCA26S10	Blank	White

Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
FCA26S10	7.2	7.7	0.068	0.031

CENTER-TO-CENTER SPACING GUIDELINES

Consult factory for details.