

FCBLED22-30W Premium Performance 30 Watt 2x2 Center Basket



Project:	
Type:	
Catalog #:	



STANDARD



The premium-performance FCBLED22 is a 2' x 2' LED center basket luminaire, which offers industry-leading lumens per watt (LPW), and which is *DLC Premium* listed. The FCBLED22 is designed as a direct replacement for 2' x 2' fluorescent luminaires installed in grid ceilings. It is designed to deliver general ambient lighting in a variety of indoor settings, including schools, offices, hospitals and stores, and is the perfect choice for both new construction and retrofits. This high-efficacy luminaire provides long-life and uniform illumination, as well as standard 0-10vdc dimming capability.

FEATURES

- Available in 3000k (warm white), 4000k (neutral white) and 5000k (cool white) color temperatures.*
- Long-life LEDs provide 81,000 hours of operation with at least 70% of initial lumen output (L_{70}).**
- Provides 3,709 luminaire lumens (124 lumens per watt, LPW) at 3000k, 3,766 luminaire lumens (126 LPW) at 4000k, and 3,823 luminaire lumens (128 LPW) at 5000k.*
- Uniform illumination with no visible LED pixelation.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- 0-10vdc dimming capability is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Steel housing and acrylic lens.
- Easy installation in new construction or retrofit. Fits in standard 2' x 2' grid ceilings.
- Standard earthquake clips provide secure installation in grid ceilings.


* Contact factory for other color temperatures and lumen packages.

** L_{70} hours are IES TM-21-11 calculated hours.

WARRANTY & LISTINGS

- UL listed for damp locations and insulated ceilings (IC-rated) for use in ambient temperatures from -25°C to 50°C (-13°F to 122°F).
- DLC Premium listed.
- Complies with FCC Part 15, part B.
- 5-year warranty of all electronics and housing.

DIMENSIONS

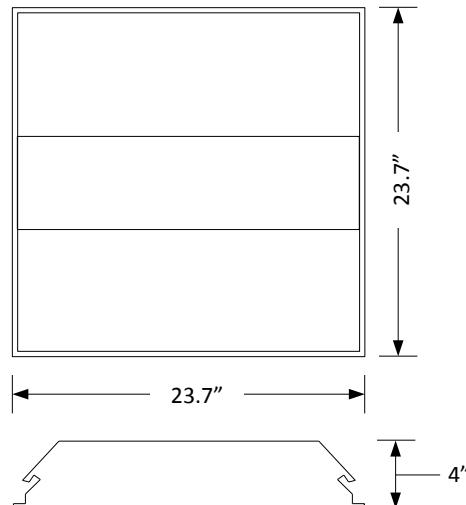

Weight: 8.4 lbs.

ORDERING INFORMATION

Example: FCBLED22-30W-3KMV-DLCPRM-BES-SMK

Model	Luminaire Watts	Luminaire Lumens	Lumens/Watt	Color Temperature	Input Voltage	DLC Listing	Options
FCBLED22-30W	30	3,709 3,766 3,823	124 126 128	3K = 3000k 4K = 4000k 5K = 5000k	MV = Multi-volt (120-277V)	DLCPRM-BES = DLC Premium	SMK = Surface Mounting Kit


ELECTRICAL DATA

Model	Color Temp.	CRI ¹	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input Voltage	Input Current (A)			Power Factor	THD ²	L ₇₀ Hours ³
							120V	240V	277V			
FCBLED22-30W-3K MV-DLCPRM-BES	3000k	> 80	3,709	30	124	120-277	0.25	0.13	0.11	> 90%	< 20%	81,000
FCBLED22-30W-4K MV-DLCPRM-BES	4000k	> 80	3,766	30	126	120-277	0.25	0.13	0.11	> 90%	< 20%	81,000
FCBLED22-30W-5K MV-DLCPRM-BES	5000k	> 80	3,823	30	128	120-277	0.25	0.13	0.11	> 90%	< 20%	81,000

¹ Color rendering index.² All 50-60Hz.³ Total harmonic distortion.⁴ L₇₀ refers to the number of hours at which lumen output declines to 70% of the initial level. L₇₀ hours are IES TM-21-11 calculated hours.

PHOTOMETRIC DATA

FCBLED22-30W-5K MV-DLCPRM-BES (3,823 Lumens)

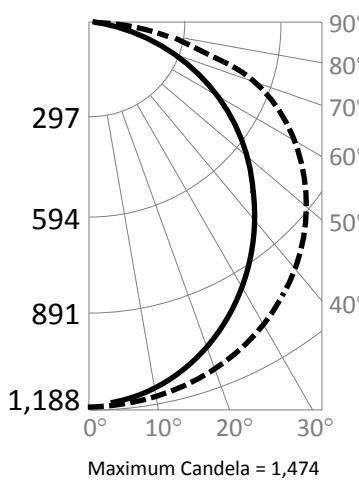

Candlepower Summary

	0°	90°
0°	1,180	1,180
10°	1,171	1,164
20°	1,132	1,099
30°	1,067	995
40°	976	854
50°	868	690
60°	736	508
70°	565	315
80°	193	133
90°	0	0
90° - 180°	0	0
0° - 180°	3,823	100.0%

Zonal Lumen Summary

Zone	Lumens	% Fixture
0° - 10°	116	3.0%
0° - 20°	450	11.8%
0° - 30°	959	25.1%
0° - 40°	1,582	41.4%
0° - 50°	2,246	58.8%
0° - 60°	2,878	75.3%
0° - 70°	3,408	89.1%
0° - 80°	3,744	97.9%
0° - 90°	3,823	100.0%
90° - 180°	0	0%
0° - 180°	3,823	100.0%

Cone of Light

