

Project:	
Type:	
Catalog #:	



STANDARD



The FLEDWPCA series is a contemporary, commercial-grade area luminaire. It features a heavy-duty, spring-loaded hinge, which provides the flexibility of focusing light near the mounting surface or projecting light forward. With a die cast aluminum housing and a polycarbonate lens, the FLEDWPCA series will stand up to many years of punishing environmental conditions. High-efficacy, long-life LEDs provide both energy and maintenance cost savings compared to traditional, HID area lights.

FEATURES

- Available in 3000k (warm white), 4000k (neutral white) and 5000k (cool white) color temperatures.*
- Long-life LEDs provide 69,000 hours of operation with at least 70% of initial lumen output (L_{70}).**
- Delivers 1,211 lumens & 101 lumens per watt (LPW) at 3000k; 1,285 lumens & 107 LPW at 4000k; and 1,321 lumens & 110 LPW at 5000k.*
- Heavy-duty, spring-loaded hinge provides the flexibility of focusing light near the mounting surface or projecting light forward.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Watertight, compression-type electrical connectors prevent moisture intrusion.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Die cast aluminum housing with durable, dark bronze, powder coat paint.
- Durable, UV-resistant polycarbonate lens.
- Removable, threaded plugs for side attachment of $\frac{1}{2}$ " rigid electrical conduit, or for button photocells.
- Easy installation in new construction or retrofit.

*Contact factory for other color temperatures and lumen packages.


** L_{70} hours are IES TM-21-11 calculated hours.

WARRANTY & LISTINGS


- cULus listed for wet locations (-20°C to 40°C / -4°F to 104°F).
- IP65 rated.
- DLC standard approved.
- Complies with FCC Part 15 class B.
- Complies with EN61000-4-5, surge immunity (1kV).
- 5-year warranty on all electronics and housing.

VERTICAL ADJUSTABILITY

- Heavy-duty, spring-loaded hinge provides vertical adjustability of the luminaire housing up to 65°.
- Adjustability provides for a range of lighting effects from full-cutoff downlight to forward throw.
- Knurled notches securely retain rotated position even in demanding environments.



DIMENSIONS

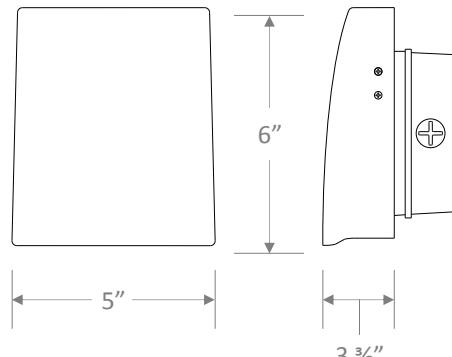

Weight: 2.4 lb.

ORDERING INFORMATION

Model	Color Temperature	Luminaire Lumens	Luminaire Watts	Lumens Per Watt
FLEDWPCA12W-3K	3000k	1,211	12	101
FLEDWPCA12W-4K	4000k	1,285	12	107
FLEDWPCA12W-5K	5000k	1,321	12	110

FLEDWPCA12W 12 Watt Adjustable Full Cutoff LED Area Light



ELECTRICAL

Model	Color Temperature	CRI ¹	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input Voltage ²	Input Current (A)			Power Factor	THD ³	L ₇₀ Hours ⁴
							120V	240V	277V			
FLEDWPCA12W-3K	3000k	> 80	1,211	12	101	120-277	0.10	0.05	0.04	> 90%	< 20%	69,000
FLEDWPCA12W-4K	4000k	> 80	1,285	12	107	120-277	0.10	0.05	0.04	> 90%	< 20%	69,000
FLEDWPCA12W-5K	5000k	> 80	1,321	12	110	120-277	0.10	0.05	0.04	> 90%	< 20%	69,000

¹ Color rendering index.



² All 50-60Hz.

³ Total harmonic distortion.

⁴ L₇₀ refers to the number of hours at which lumen output declines to 70% of the initial level. L₇₀ hours are IES TM-21-11 calculated hours.

PHOTOMETRIC DATA

FLEDWPCA12W-5K (1,321 Lumens)

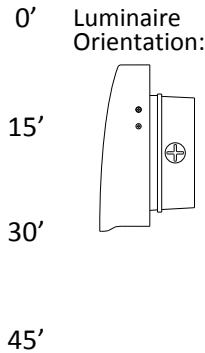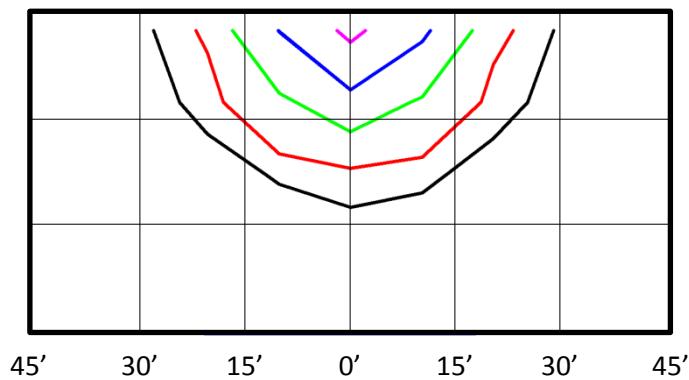

BUG Rating: B1-U0-G0

Zone	Lumens	%
FL - Front - Low (0-30)	229	17%
FM - Front - Medium (30-60)	373	28%
FH - Front - High (60-80)	89	7%
FVH - Front - Very High (80-90)	4	0%
Total Forward Light	696	53%
BL - Back - Low (0-30)	212	16%
BM - Back - Medium (30-60)	322	24%
BH - Back - High (60-80)	82	6%
BVH - Back - Very High (80-90)	8	1%
Total Back Light	625	47%
UL - Up Light - Low (90-100)	0	0%
UH - Up Light - High (100-180)	0	0%
Total Up Light	0	0%

Foot Candles	5.0
2.0	
1.0	
0.5	
0.2	
0.1	

Notes:

- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 15 feet.

Total Lumens 1,321 100%