

Project:	
Type:	
Catalog #:	



STANDARD LOOP, 1.5 METER CORD


Parameters

STOCK WHITE




Items	Parameter		
Nominal Wattage	100W	150W	
Model No.	F&B-100-LV-WHT	F&B-150-LV-WHT	
Luminous Flux	12,000-13,000lm	19,200-20,800lm	
LED Chip	Souel SMD		
Color Range	5000 K		
Heat Radiator	Aluminum alloy		
Operation Temp.	-30°C to 45°C		
Lifespan	>60,000hrs (Ta=25 @ L70)		
Input Voltage	AC100-277V		
Frequency	50/60Hz		
Beam Angle	45°/90°		
Color Index(cri)	80 / 90		
P.F.	≥0. 95		
Power Efficiency	≥93%		
IP Grade	IP65		
Intelligent			

Photometric Diagram

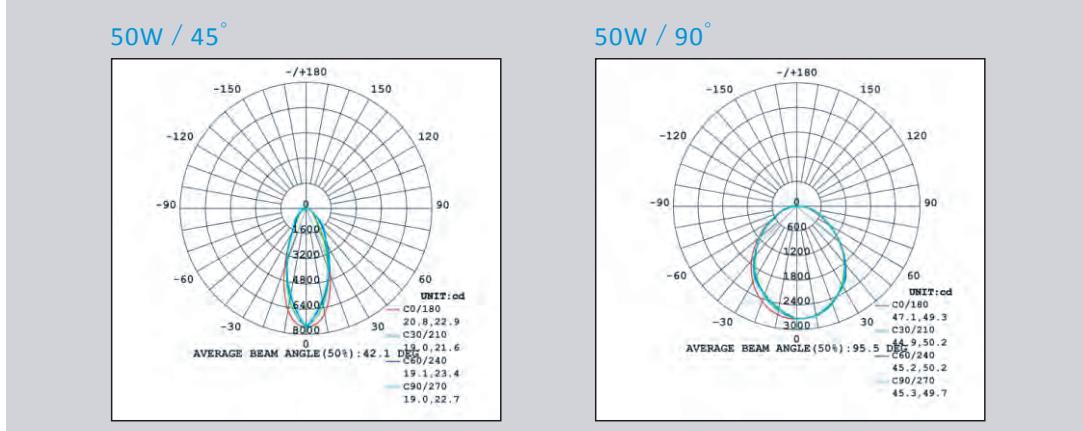


Dimension Diagram


50W / 80W / 100W

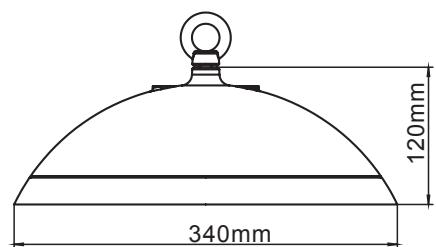


120W / 150W

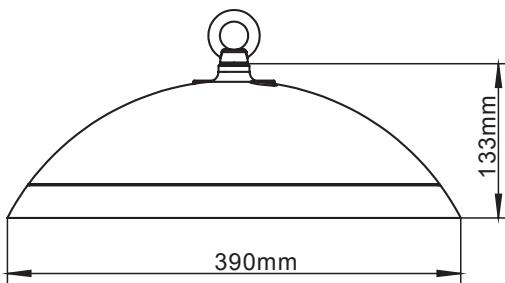


Installation Instruction

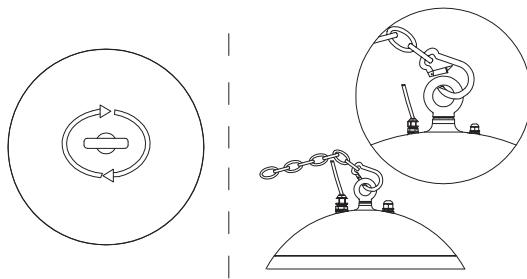


Step 1: Insert the o-hook into lamp body and screw up by rotating clockwise. Connect the carabiner with o-hook.



Step 2: Drill in ceiling surface according to the hole location of suspension parts.

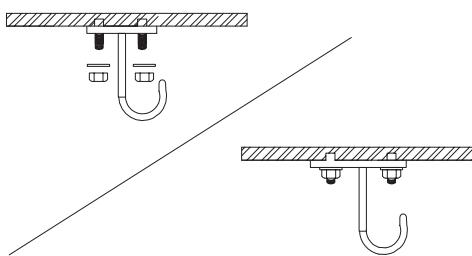

Step 3: Fix the suspension parts onto ceiling surface and tighten the screws.

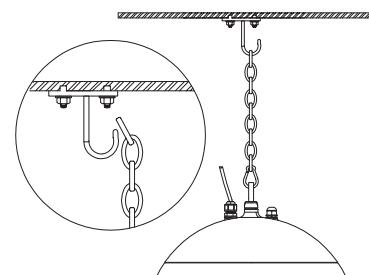

Step 4: Hang the safety rope onto ceiling surface and finish the installation.

Product Feature

- ◆ New type of led high bay for wider application field, high safety performance, no glass.
- ◆ Elegant appearance design combined with modern art, science and technology.
- ◆ Up to 130lm/w, superior lighting performance.
- ◆ IP65 grade, stronger anti-corrosion & anti-aging performance.

