

Project:	
Type:	
Catalog #:	



STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life red LED.
- New York City approved 8" EXIT letters.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Premium-grade, aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

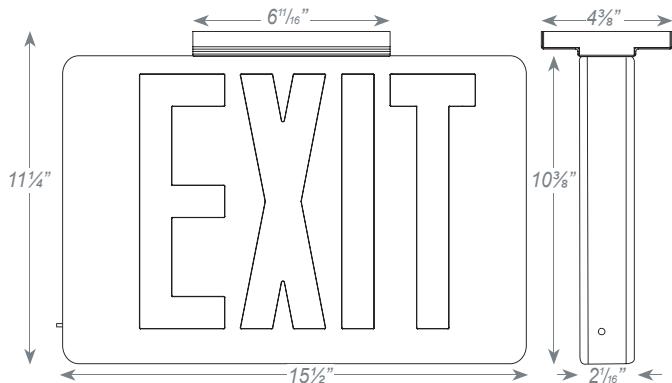

ORDERING INFORMATION

Sample Part Number: FNYKXTEU-1-R-B-A-EM

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	PANEL	BATTERY	OPTIONS
FNYKXTEU	1	Single Face	R Red	W White	Blank	SDT Self-diagnostics ¹
	2	Double Face	B Black	B Black	EM AC Only	2C Dual circuit ²
	3	Universal Single/Double face	A Aluminum	A Aluminum	Battery Backup	

¹ Available in EM units only

² Available in AC units only

Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
FNYXTEU/EM	5.0	5.0	0.041	0.018