

Project:	
Type:	
Catalog #:	

## STANDARD



## OPTIONAL



## ILLUMINATION

- Ultra-bright, energy efficient, long-life red LED.
- NY approved 8" exit letters.

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

## HOUSING

- Premium-grade, aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.

## ORDERING INFORMATION




## OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual-circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.

## WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations (0°C – 50°C).

## DIMENSIONS

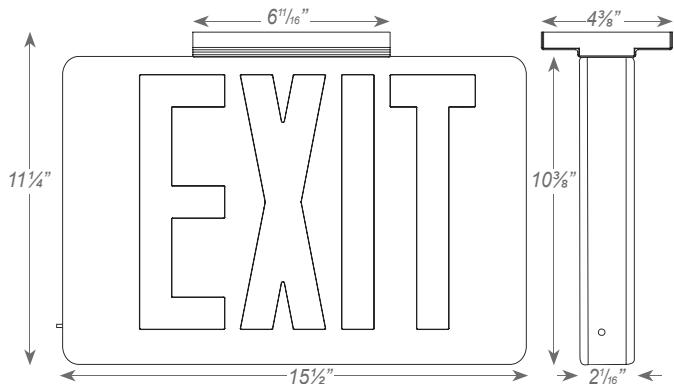

Sample Part Number: **FNYKXTEU-1-R-B-A-EM**

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	PANEL	BATTERY	OPTIONS
FNYKXTEU	1	Single Face	R Red	W White	W White	Blank AC Only
	2	Double Face		B Black	B Black	EM Battery Backup
	3	Universal Single/ Double face		A Aluminum	A Aluminum	SDT 2C Self-diagnostics <sup>1</sup> Dual-Circuit <sup>2</sup>

<sup>1</sup> Available in EM units only

<sup>2</sup> Available in AC units only

Project:	
Type:	
Catalog #:	

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
FNYXTEU/EM	5.0	5.0	0.041	0.018