

FPLELRXTEU Thermoplastic LED Edgelit Exit Sign



Project:	
Type:	
Catalog #:	

STANDARD



OPTIONAL



ILLUMINATION

- Ultra-bright, energy efficient, long-life Red or Green LED.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery)
- Push to test switch for mandated code compliance testing.
- 4.8V long-life maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top, end or back mount.

HOUSING

- Injection-molded, engineering-grade 5VA, flame retardant, high-impact resistant thermoplastic housing in white or black finish.
- Self-adhesive Chevron appliques and guide template provided for directional indication.


OPTIONS

- Custom: Signs available with requested 'special' wording.
- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.
- 2C: Dual-circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery is pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (0°C – 50°C)

DIMENSIONS

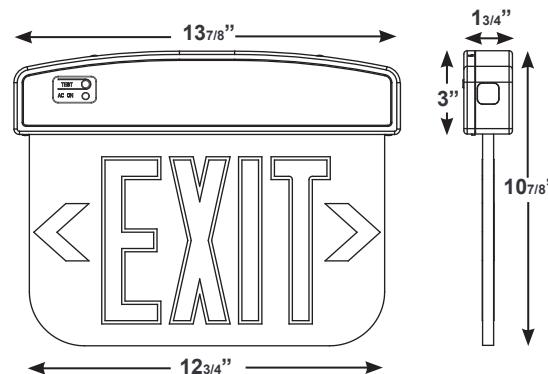

ORDERING INFORMATION

Sample Part Number: FPLELRXTEU-1-R-C-A-EM

Special voltage options available. Check with your Best Lighting Representative.

Model	No. of faces	Letter	Panel	Housing	Battery	Options
FPLELRXTEU	1 Single Face	R Red	C Clear*	W White	Blank AC Only	Custom Custom Wording
	2 Double Face	G Green	M Mirror	B Black	EM Battery Backup	SDT Self-Diagnostics 2C Dual-Circuit
*With single face only.						

FPLELRXTEU Thermoplastic LED Edgelit Exit Sign



Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
FPLELRXTEU RED/GREEN/EM/2C/SDT	4.1	4.1	0.030	0.020