

# JGMPAL80/100/150 FLOOD/AREA LIGHT



Project:	
Type:	
Catalog #:	

## STANDARD



The JGMPAL series is a group of architectural LED area luminaires designed to illuminate parking areas, pathways, building facades, loading docks, and a wide variety of other large, general site lighting applications. Multiple mounting options make the JGMPAL a versatile luminaire for flood lighting, pole-, ground- and wall-mounted area lighting, and other outdoor lighting requirements.

## FEATURES

- Available in 4000K (neutral white) and 5000K (cool white).\*
- Long-life LEDs provide at least 58,000 hours of operation with at least 70% of initial lumen output ( $L_{70}$ ).\*\*
- JGMPAL80 delivers 8,591 lumens (110 lumens per watt, LPW) at 4000k, and 9,064 lumens (116 LPW) at 5000k.\*
- JGMPAL100 T delivers 10,035 lumens (102 LPW) at 4000k, and 11,021 lumens (112 LPW) at 5000k.\*
- JGMPAL150 delivers 15,131 lumens (98 LPW) at both 4000k and 5000k.\*
- Universal 120-277 AC voltage (50-60Hz) is standard.
- 0-10vdc dimming capability is standard on LEDMPAL100-T and JGMPAL150
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Die cast aluminum housing with durable, dark bronze powder coat finish, and a heat-resistant polycarbonate lens.
- Wireway enclosure is sealed with a water-tight, silicon rubber gasket.
- Effective projected areas (EPA's) are: Front = 0.38 sf; Side = 0.30 sf; and Face = 1.04 sf.
- Threaded receptacle (1/2" NPS) for photocell. Optional arms and slip-fitters provide additional photocell mounting options.
- Easy installation in new construction or retrofit applications.

\* Contact factory for other color temperatures and lumen packages.

\*\*  $L_{70}$  hours are IES TM-21-11 calculated hours.

## ORDERING INFORMATION

Model	Mounting Type	Luminaire Watts	Color Temperature	Luminaire Lumens	Lumens / Watt	Additional Mounting Options* (Order Separately)
JGMPAL80	T = Trunnion* Y = Yoke	78	4K = 4000k 5K = 5000k	8,591 9,064	110 116	Slip-Fitter = FALLEDMRT-SF 80/300 Steel Arm = FALLEDMRT-A-80/300
JGMPAL100	T = Trunnion* Y = Yoke	98	4K = 4000k 5K = 5000k	10,035 11,021	102 112	Note: These Mounting Options are not compatible with yoke-mounted models. Slipfitters and arms use the same mounting hardware as trunnion-mounted models.
JGMPAL50	T = Trunnion* Y = Yoke	154	4K = 4000k 5K = 5000k	15,131 15,131	98 98	



Shown with standard trunnion mount



Shown with optional yoke mount

## WARRANTY & LISTINGS

- cULus listed for wet locations (-30°C to 40°C / -22°F to 104°F)
- IP65 rated.
- DLC approved.
- Complies with FCC Part 15.
- Complies with EN61000-4-5, surge immunity (LEDMPAL80 - 2kV, JGMPAL100 & JGMPAL150 6kV).
- Complies with EN61000-4-2 level 2 electrostatic discharge (4kV).
- Tested to UL1598, UL8750 and IEC60598 safety standards.
- 5-year warranty on all electronics and housing.

## MOUNTING OPTIONS

- Trunnion mount is standard.
- Slip-fitter mount provides attachment to poles (2" O.D. tenon).
- Steel arm mount provides secure attachment to flat surfaces.
- Yoke mount models are available by special order.



Steel Arm Mount Option




Slip-Fitter Mount Option



Yoke Mount Option

## DIMENSIONS

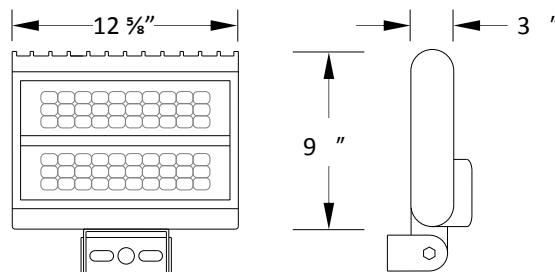

Weight: 9.6 lb.

## ELECTRICAL DATA

Model	Color Temperature	CRI <sup>1</sup>	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input Voltage	Input Current (A)			Power Factor	THD <sup>2</sup>	L <sub>70</sub> Hours <sup>3</sup>
							120V	240V	277V			
JGMPAL80-4K	4000k	> 80	8,591	78	110	120-277 (50-60Hz)	0.65	0.33	0.28	> 90%	< 20%	69,000
JGMPAL80-5K	5000k	> 80	9,064	78	116	120-277 (50-60Hz)	0.65	0.33	0.28	> 90%	< 20%	69,000
JGMPAL100-4K	4000k	> 80	10,035	98	102	120-277 (50-60Hz)	0.82	0.41	0.35	> 90%	< 20%	69,000
JGMPAL100-5K	5000k	> 80	11,021	98	112	120-277 (50-60Hz)	0.82	0.41	0.35	> 90%	< 20%	69,000
JGMPAL150-4K	4000k	> 80	15,131	154	98	120-277 (50-60Hz)	1.28	0.64	0.56	> 90%	< 20%	58,000
JGMPAL150-5K	5000k	> 80	15,131	154	98	120-277 (50-60Hz)	1.28	0.64	0.56	> 90%	< 20%	58,000

<sup>1</sup> Color rendering index


<sup>2</sup> Total harmonic distortion

<sup>3</sup> L<sub>70</sub> refers to the number of hours at which lumen output declines to 70% of the initial level. L<sub>70</sub> hours are IES TM-21-11 calculated hours.

## PHOTOMETRIC DATA

JGMPAL80-4K (8,591 Lumens, , Type V Distribution)

BUG Rating: B3-U2-G2

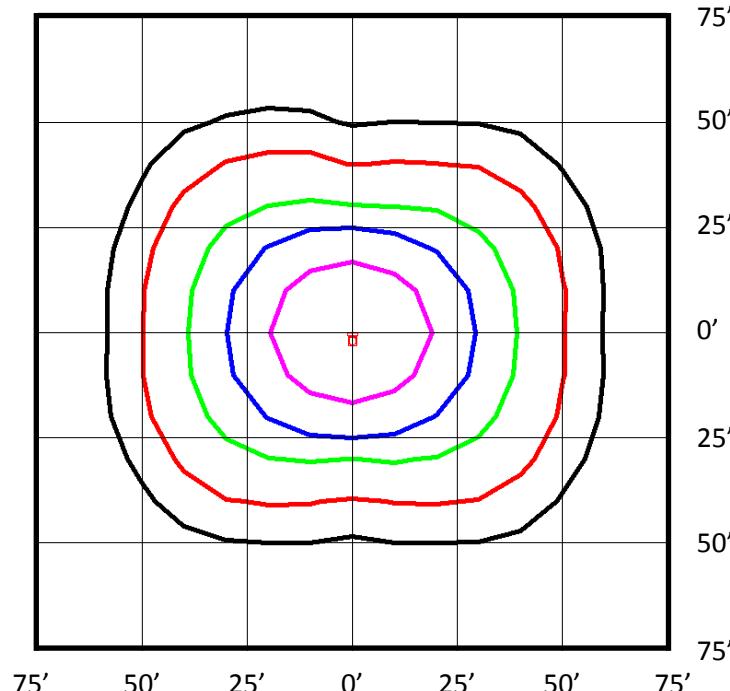


Zone	Lumens	%
FL - Front - Low (0-30)	1,069	12%
FM - Front - Medium (30-60)	2,301	27%
FH - Front - High (60-80)	827	10%
FVH - Front - Very High (80-90)	73	1%
<b>Total Forward Light</b>	<b>4,271</b>	<b>50%</b>
BL - Back - Low (0-30)	1,090	13%
BM - Back - Medium (30-60)	2,293	27%
BH - Back - High (60-80)	856	10%
BVH - Back - Very High (80-90)	64	1%
<b>Total Back Light</b>	<b>4,302</b>	<b>50%</b>
UL - Up Light - Low (90-100)	1	0%
UH - Up Light - High (100-180)	17	0%
<b>Total Up Light</b>	<b>18</b>	<b>0%</b>
<b>Total Lumens</b>	<b>8,591</b>	<b>100%</b>

### Notes:

- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 25 feet.

## PHOTOMETRIC DATA


JGMPAL100-4K (10,035 Lumens, Type V Distribution)

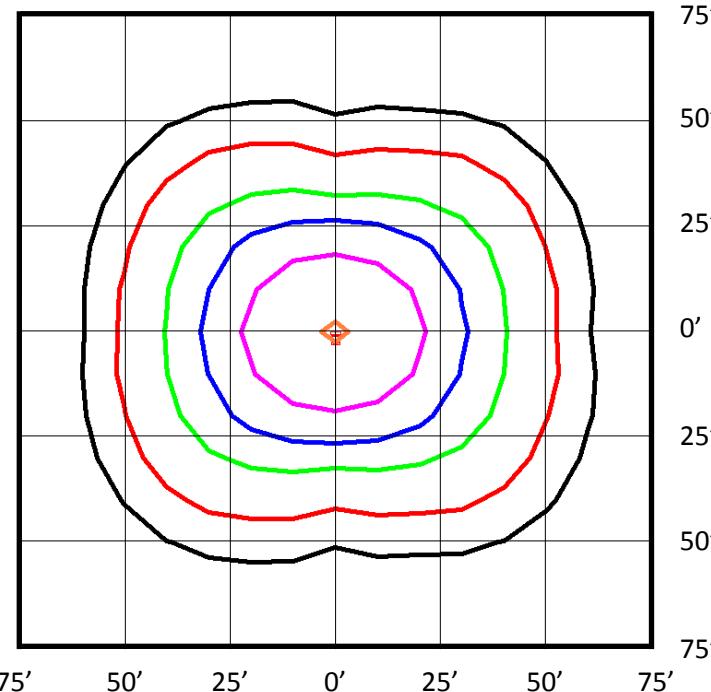

BUG Rating: B3-U2-G2

Zone	Lumens	%
FL - Front - Low (0-30)	1,285	13%
FM - Front - Medium (30-60)	2,708	27%
FH - Front - High (60-80)	997	10%
FVH - Front - Very High (80-90)	87	1%
Total Forward Light	5,077	51%
BL - Back - Low (0-30)	1,259	13%
BM - Back - Medium (30-60)	2,654	26%
BH - Back - High (60-80)	960	10%
BVH - Back - Very High (80-90)	71	1%
Total Back Light	4,944	49%
UL - Up Light - Low (90-100)	1	0%
UH - Up Light - High (100-180)	14	0%
Total Up Light	15	0%
Total Lumens	10,035	100%

JGMPAL150-T-4K (15,131 Lumens, Type V Distribution)

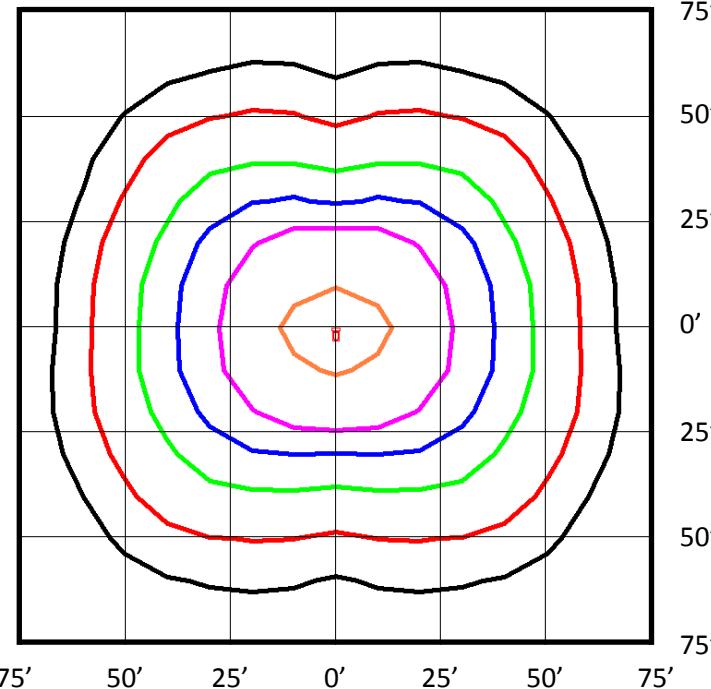

BUG Rating: B3-U2-G3

Zone	Lumens	%
FL - Front - Low (0-30)	1,836	12%
FM - Front - Medium (30-60)	4,134	27%
FH - Front - High (60-80)	1,655	11%
FVH - Front - Very High (80-90)	128	1%
Total Forward Light	7,754	51%
BL - Back - Low (0-30)	1,747	12%
BM - Back - Medium (30-60)	3,936	26%
BH - Back - High (60-80)	1,574	10%
BVH - Back - Very High (80-90)	96	1%
Total Back Light	7,353	49%
UL - Up Light - Low (90-100)	1	0%
UH - Up Light - High (100-180)	24	0%
Total Up Light	25	0%
Total Lumens	15,132	100%

Foot Candles	
5.0	
2.0	
1.0	
0.5	
0.2	
0.1	

## Notes:

- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 25 feet.