

JGMPPAL80-140

80-140 Watt, Premium Multi-Purpose LED Area Luminaire



Project:	
Type:	
Catalog #:	

STANDARD



The JGMPPALPRO series is a group of premium architectural LED area luminaires designed to illuminate parking areas, pathways, building facades, loading docks, and a wide variety of other large, general site lighting applications. Multiple mounting options make the JGMPPALPRO a versatile luminaire for flood lighting, pole-, ground- and wall-mounted area lighting, and other outdoor lighting requirements.

FEATURES

- Available in 4000k (neutral white) and 5000k (cool white) color temperatures.*
- Long-life LEDs provide 372,000 hours of operation with at least 70% of initial lumen output (L_{70}).**
- Available models provide from 9,816 to 18,408 lumens, and from 117 to 131 lumens per watt (LPW).*
- IES roadway photometric distributions include types II-V.
- NEMA floodlight distributions include very narrow (3H x 3V), medium narrow (4H x 4V), medium wide (5H x 5V) & very wide (7H x 7V).
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Optional glare shields (full & half) & wire guards are available.
- Optional NEMA photocell installation kit provides watertight photocell attachment to driver enclosure clover.
- Die cast aluminum housing with durable, dark bronze powder coat finish—at least 2 mils thick on all surfaces—and a heat-resistant polycarbonate lens.
- Driver enclosure is sealed with a water-tight, silicon rubber gasket.
- Effective projected areas (EPA's) are:
 - Front = 0.24 square feet
 - Side = 0.29 square feet
 - Face = 1.10 square feet
- Easy installation in new construction or retrofit applications.

* Contact factory for other color temperatures and lumen packages.


** L_{70} hours are IES TM-21-11 calculated hours.



WARRANTY & LISTINGS

- cULus listed for wet locations in ambient temperatures from -20°C to 45°C (-4°F to 113°F).
- IP66 rated for ingress protection.
- DLC premium approved.
- Flicker-free per IEEE1789-2015 (no observable adverse effects of flicker at 100% light output level).
- Rated for 3G vibration.
- Lens is IK 9 rated for protection from external impacts.
- Salt fog tested for 1,000 hours (ASTM B117). After salt fog testing, paint rated at 9 per ASTM D1654-05 scratch test.
- Complies with FCC Part 15, class B.
- Complies with EN61000-4-5, surge immunity protection (6kV).
- 5-year warranty of all electronics and housing.

DIMENSIONS

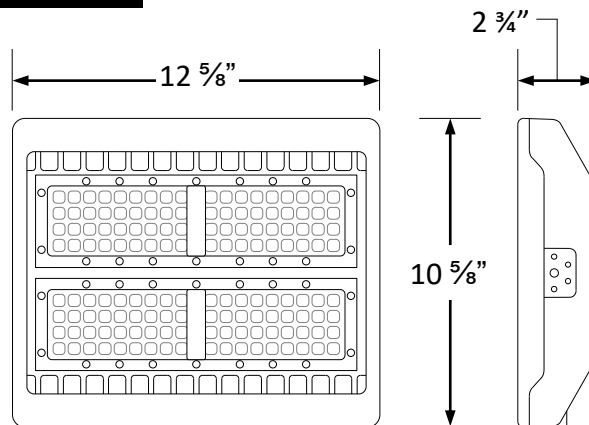

Weight: 8.2 lbs. (80W), 10.8 lbs. (100W) & 11 lbs. (140W)

ORDERING INFORMATION

Example: JGMPPAL80-4K + JGMPPAL-YK-80/140 + JGMPPAL80/100/140-FGS + JGMPPAL80/100/140-WG Premium-performance multi-purpose area luminaire, 80 watt, 4000k, yoke mounting bracket, full glare shield & wire guard

Model	Color Temperature	Mounting Brackets (Order Separately)	Shields, Wire Guards & NEMA Photocell Kit (Order Separately)
JGMPPAL80	4K = 4000k	JGMPPAL-YK-80/140 = Yoke Mounting Bracket, 80 – 140W	JGMPPAL80/100/140-FGS = Full Glare Shield, 80 – 140W
JGMPPAL100	5K = 5000k	JGMPPAL-TR-80/280 = Trunnion Mounting Bracket, 80 – 280W	JGMPPAL80/100/140-HGS = Half Glare Shield, 80 – 140W
JGMPPAL140		JGMPPAL-ARM-80/280 = Arm Mounting Bracket, 80 – 280W	JGMPPAL80/100/140-WG = Wire Guard, 80 – 140W
		JGMPPAL-SF-80/280 = Slip-Fitter Mounting Bracket, 80 – 280W	JGMPPAL-PCKIT-80/280 = NEMA Photocell Installation Kit, 80 – 280W

ELECTRICAL DATA

Model	Color Temp.	CRI ¹	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input Voltage ²	Input Current (A)			Power Factor	THD ³	L ₇₀ Hours ⁴	
							120V	240V	277V				
IES Roadway Distributions ⁵													
	JGMPPAL80-4K-T2	4000k	> 80	10,445	81	129.0	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000
	JGMPPAL80-5K-T2	5000k	> 80	10,584	81	130.7	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000
	JGMPPAL80-4K-T3	4000k	> 80	10,439	81	128.9	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000
	JGMPPAL80-5K-T3	5000k	> 80	10,613	81	131.0	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000
	JGMPPAL80-4K-T4	4000k	> 80	10,377	81	128.1	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000
	JGMPPAL80-5K-T4	5000k	> 80	10,491	81	129.5	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000
	JGMPPAL80-4K-T5	4000k	> 80	9,816	81	121.2	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000
	JGMPPAL80-5K-T5	5000k	> 80	10,008	81	123.6	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000
	JGMPPAL100-4K-T2	4000k	> 80	12,958	101	128.3	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000
	JGMPPAL100-5K-T2	5000k	> 80	13,101	101	129.7	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000
	JGMPPAL100-4K-T3	4000k	> 80	12,521	101	124.0	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000
	JGMPPAL100-5K-T3	5000k	> 80	12,673	101	125.5	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000
	JGMPPAL100-4K-T4	4000k	> 80	12,693	101	125.7	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000
	JGMPPAL100-5K-T4	5000k	> 80	12,770	101	126.4	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000
	JGMPPAL100-4K-T5	4000k	> 80	11,834	101	117.2	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000
	JGMPPAL100-5K-T5	5000k	> 80	12,084	101	119.6	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000
JGMPPAL140-4K-T2	4000k	> 80	17,740	141	125.8	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
JGMPPAL140-5K-T2	5000k	> 80	18,009	141	127.7	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
JGMPPAL140-4K-T3	4000k	> 80	17,176	141	121.8	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
JGMPPAL140-5K-T3	5000k	> 80	17,338	141	123.0	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
JGMPPAL140-4K-T4	4000k	> 80	17,865	141	126.7	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
JGMPPAL140-5K-T4	5000k	> 80	18,080	141	128.2	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
JGMPPAL140-4K-T5	4000k	> 80	16,438	141	116.6	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
JGMPPAL140-5K-T5	5000k	> 80	16,687	141	118.3	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
NEMA Floodlight Distributions ⁶													
JGMPPAL80-4K-VN	4000k	> 80	10,324	81	127.5	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000	
JGMPPAL80-5K-VN	5000k	> 80	10,417	81	128.6	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000	
JGMPPAL80-4K-MN	4000k	> 80	10,357	81	127.9	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000	
JGMPPAL80-5K-MN	5000k	> 80	10,435	81	128.8	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000	
JGMPPAL80-4K-MW	4000k	> 80	10,217	81	126.1	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000	
JGMPPAL80-5K-MW	5000k	> 80	10,317	81	127.4	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000	
JGMPPAL80-4K-VW	4000k	> 80	9,818	81	121.2	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000	
JGMPPAL80-5K-VW	5000k	> 80	10,009	81	123.6	120-277	0.68	0.34	0.29	> 90%	< 20%	372,000	
JGMPPAL100-4K-VN	4000k	> 80	13,112	101	129.8	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000	
JGMPPAL100-5K-VN	5000k	> 80	13,240	101	131.1	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000	
JGMPPAL100-4K-MN	4000k	> 80	13,102	101	129.7	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000	
JGMPPAL100-5K-MN	5000k	> 80	13,243	101	131.1	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000	
JGMPPAL100-4K-MW	4000k	> 80	13,081	101	129.5	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000	
JGMPPAL100-5K-MW	5000k	> 80	13,202	101	130.7	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000	
JGMPPAL100-4K-VW	4000k	> 80	11,834	101	117.2	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000	
JGMPPAL100-5K-VW	5000k	> 80	12,084	101	119.6	120-277	0.84	0.42	0.36	> 90%	< 20%	372,000	
JGMPPAL140-4K-VN	4000k	> 80	18,230	141	129.3	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
JGMPPAL140-5K-VN	5000k	> 80	18,394	141	130.5	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
JGMPPAL140-4K-MN	4000k	> 80	18,249	141	129.4	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
JGMPPAL140-5K-MN	5000k	> 80	18,408	141	130.6	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
JGMPPAL140-4K-MW	4000k	> 80	18,179	141	128.9	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
JGMPPAL140-5K-MW	5000k	> 80	18,360	141	130.2	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
JGMPPAL140-4K-VW	4000k	> 80	16,438	141	116.6	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	
JGMPPAL140-5K-VW	5000k	> 80	16,687	141	118.3	120-277	1.18	0.59	0.51	> 90%	< 20%	372,000	



¹ Color rendering index.² All 50-60Hz.³ Total harmonic distortion.⁴ L₇₀ refers to the number of hours at which lumen output declines to 70% of the initial level. L₇₀ hours are IES TM-21-11 calculated hours.⁵ T2 = type II, T3 = type III, T4 = type IV, and T5 = type V.⁶ VN = very narrow, MN = medium narrow, MW = medium wide, and VW = very wide.

JGMPPAL80-140 80-140 Watt, Premium Multi-Purpose LED Area luminaire



PHOTOMETRIC DATA – IES Roadway Distributions

JGMPPAL80-4K-T2 (10,445 Lumens, Type II Distribution)

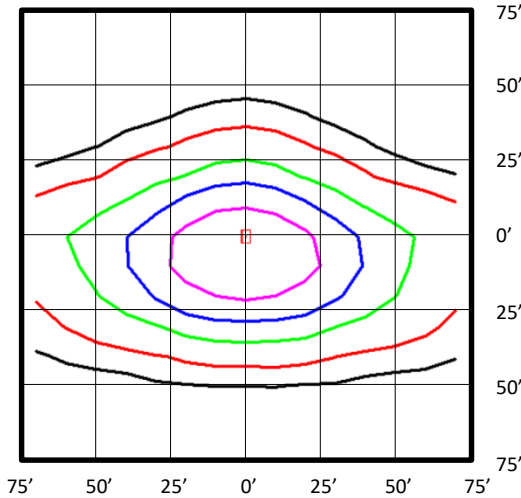



Notes:

- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 25 feet.

BUG Rating: B3-U0-G3

Zone	Lumens	%
FL - Front - Low (0-30)	1,257	12%
FM - Front - Medium (30-60)	3,523	34%
FH - Front - High (60-80)	1,863	18%
FVH - Front - Very High (80-90)	136	1%
Total Forward Light	6,779	65%
BL - Back - Low (0-30)	834	8%
BM - Back - Medium (30-60)	1,687	16%
BH - Back - High (60-80)	1,065	10%
BVH - Back - Very High (80-90)	90	1%
Total Back Light	3,676	35%
UL - Up Light - Low (90-100)	0	0%
UH - Up Light - High (100-180)	0	0%
Total Up Light	0	0%
Total Lumens	10,455	100%

JGMPPAL80-4K-T3 (10,439 Lumens, Type III Distribution)

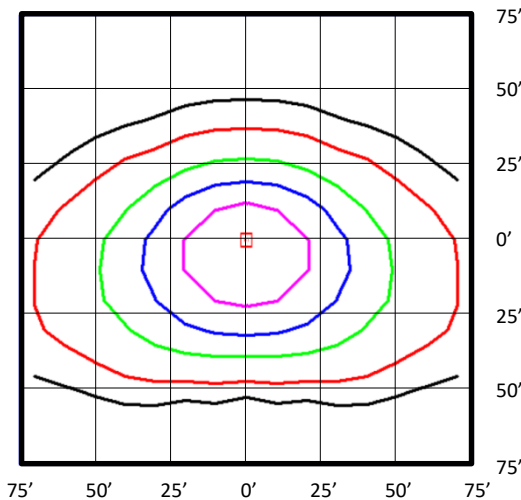



Notes:

- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 25 feet.

BUG Rating: B2-U0-G2

Zone	Lumens	%
FL - Front - Low (0-30)	1,196	11%
FM - Front - Medium (30-60)	3,384	32%
FH - Front - High (60-80)	1,952	19%
FVH - Front - Very High (80-90)	136	1%
Total Forward Light	6,668	64%
BL - Back - Low (0-30)	913	9%
BM - Back - Medium (30-60)	1,801	17%
BH - Back - High (60-80)	990	9%
BVH - Back - Very High (80-90)	67	1%
Total Back Light	3,771	36%
UL - Up Light - Low (90-100)	0	0%
UH - Up Light - High (100-180)	0	0%
Total Up Light	0	0%
Total Lumens	10,439	100%

JGMPPAL80-4K-T4 (10,377 Lumens, Type IV Distribution)

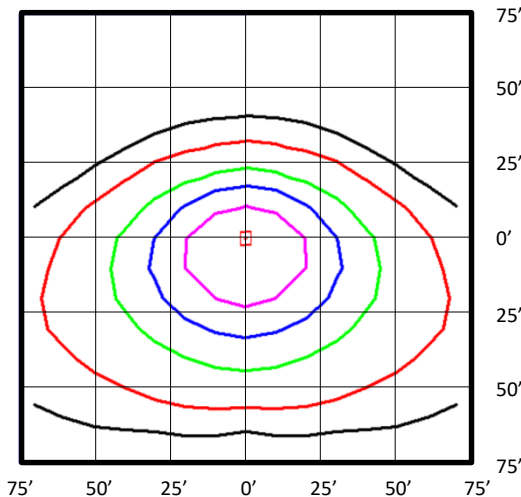

Notes:

- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 25 feet.

BUG Rating: B2-U0-G3


Zone	Lumens	%
FL - Front - Low (0-30)	1,289	12%
FM - Front - Medium (30-60)	3,309	32%
FH - Front - High (60-80)	2,399	23%
FVH - Front - Very High (80-90)	308	3%
Total Forward Light	7,304	70%
BL - Back - Low (0-30)	890	9%
BM - Back - Medium (30-60)	1,398	13%
BH - Back - High (60-80)	713	7%
BVH - Back - Very High (80-90)	72	1%
Total Back Light	3,073	30%
UL - Up Light - Low (90-100)	0	0%
UH - Up Light - High (100-180)	0	0%
Total Up Light	0	0%
Total Lumens	10,377	100%

JGMPPAL80-140 80-140 Watt, Premium Multi-Purpose LED Area luminaire



PHOTOMETRIC DATA – IES Roadway Distributions (continued)


JGMPPAL80-4K-T5 (9,816 Lumens, Type V Distribution)

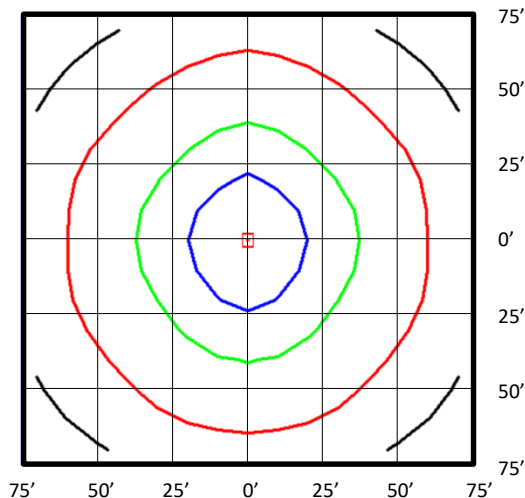

Foot Candles



Luminaire Orientation:



Notes:


- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 25 feet.

BUG Rating: B3-U0-G3

Zone	Lumens	%
FL - Front - Low (0-30)	456	5%
FM - Front - Medium (30-60)	1,929	20%
FH - Front - High (60-80)	2,319	24%
FVH - Front - Very High (80-90)	266	3%
Total Forward Light	4,970	51%
BL - Back - Low (0-30)	449	5%
BM - Back - Medium (30-60)	1,852	19%
BH - Back - High (60-80)	2,250	23%
BVH - Back - Very High (80-90)	295	3%
Total Back Light	4,846	49%
UL - Up Light - Low (90-100)	0	0%
UH - Up Light - High (100-180)	0	0%
Total Up Light	0	0%
Total Lumens	9,816	100%

PHOTOMETRIC DATA – NEMA Floodlight Distributions

JGMPPAL80-4K-VN (10,324 Lumens, Very Narrow)

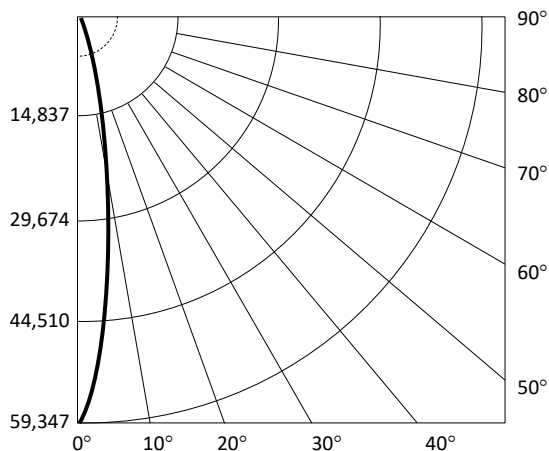

Maximum Candela = 59,347

—— Horizontal
----- Vertical

NEMA Floodlight Data


Field Angles:

- Horizontal 38°
- Vertical 39°


NEMA Type:

- Horizontal 3H
- Vertical 3V

Luminaire Orientation:



JGMPPAL80-4K-MN (10,357 Lumens, Medium Narrow)

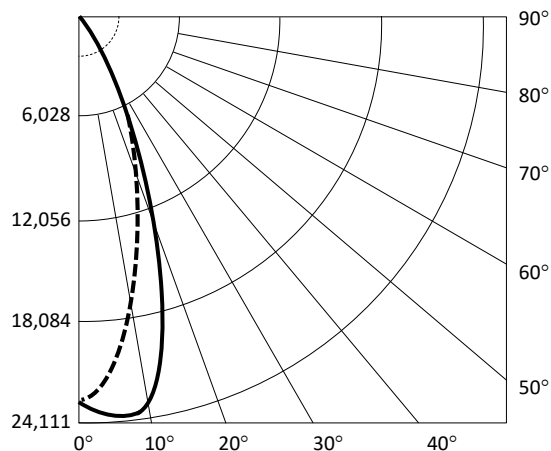

Maximum Candela = 24,111

—— Horizontal
----- Vertical

NEMA Floodlight Data


Field Angles:

- Horizontal 59°
- Vertical 60°

NEMA Type:

- Horizontal 4H
- Vertical 4V

Luminaire Orientation:




JGMPPAL80-140 80-140 Watt, Premium Multi-Purpose LED Area Luminaire



PHOTOMETRIC DATA – NEMA Floodlight Distributions (continued)

JGMPPAL80-4K-MW (10,217 Lumens, Medium Wide)

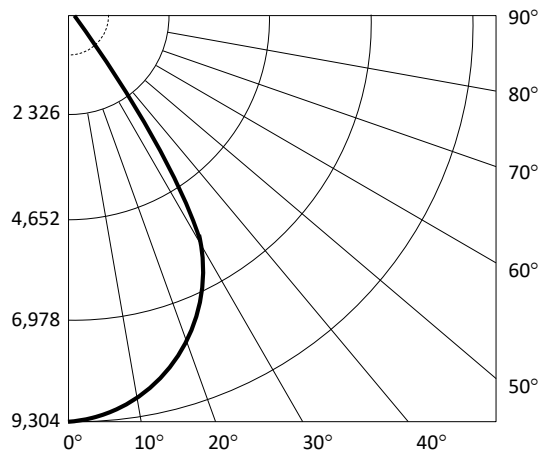

Maximum Candela = 9,304

— Horizontal
- - - Vertical

NEMA Floodlight Data


Field Angles:

- Horizontal 86°
- Vertical 86°


NEMA Type:

- Horizontal 5H
- Vertical 5V

Luminaire Orientation:



JGMPPAL80-4K-VW (9,818 Lumens, Very Wide)

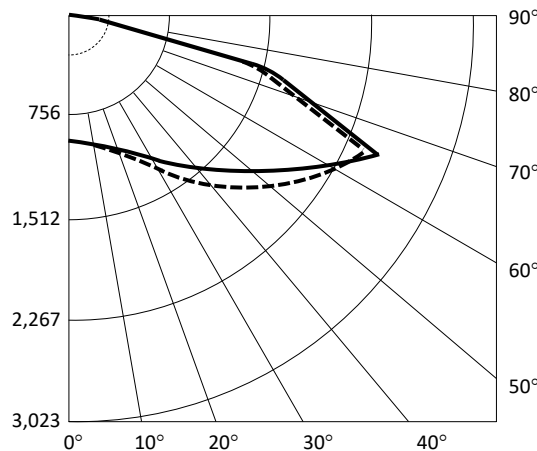

Maximum Candela = 3,023

— Horizontal
- - - Vertical

NEMA Floodlight Data


Field Angles:

- Horizontal 156°
- Vertical 172°


NEMA Type:

- Horizontal 7H
- Vertical 7V

Luminaire Orientation:




SHIELDS, WIRE GUARDS & NEMA PHOTOCELL INSTALLATION KIT




Full Shield

(JGMPPAL80/100/140-FGS)





Half Shield

(JGMPPAL80/100/140-HGS)



Wire Guard

(JGMPPAL80/100/140-WG)


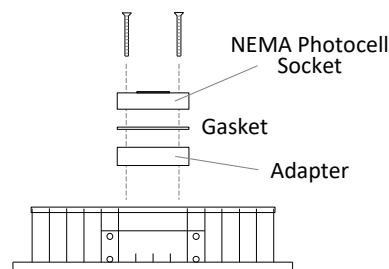


Knockout



NEMA Photocell Installation Kit

(JGMPPAL-PCKIT-80/280)



MOUNTING ACCESSORIES





Yoke Mount
JGMPPAL-YK-80/140

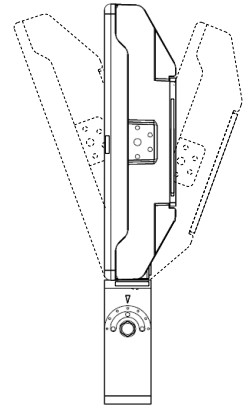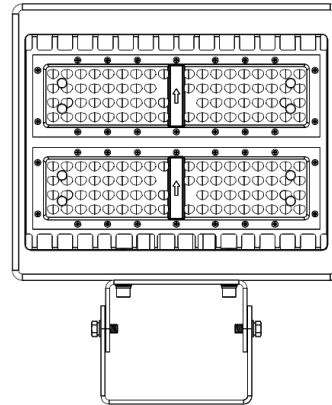

Trunnion Mount
JGMPPAL-TR-80/280

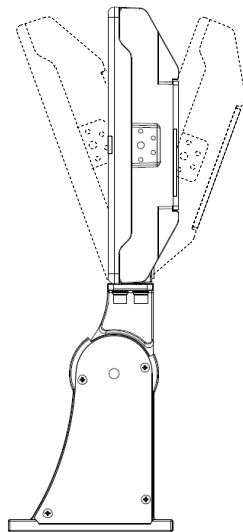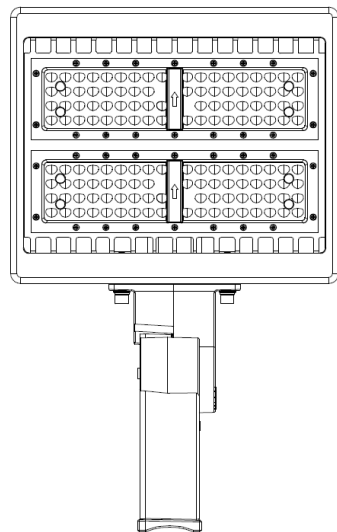

Adjustable Arm Mount
JGMPPAL-ARM-80/280

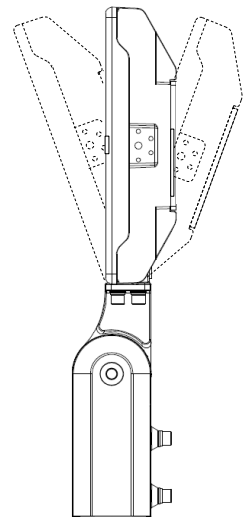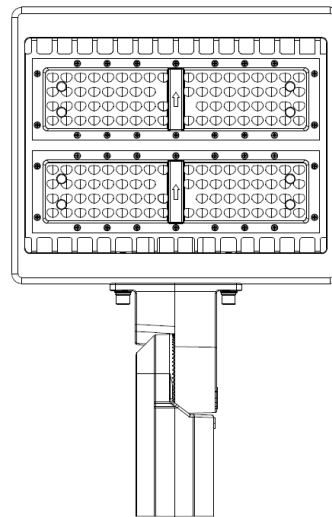

Slip-Fitter Mount
JGMPPAL-SF-80/280

All mounting accessories are adjustable up to 90° in both directions.