




The LED Vapor Tight fixture is ideally used as utility lighting in parking garages, stair wells, and harsh environments. Perfect for dry or wet location applications.

DIMENSIONS



*Note: See *Product Specification* for exact dimensions.



50"

CERTIFICATIONS



FEATURES

- Stainless steelclips
- Optional 100% DR lens additive for impact resistance
- Built-in Constant Current LED Driver with High Efficient LED Module
- Suitable for ceiling mount or suspended mount
- Suitable for damp or dry environments
- Minimize labor and recycling costs
- Excellent light distribution and uniformity
- **Rated IP65**
- 5 Year Manufacturer's Warranty

WARRANTY

- Only offer 3 year's or 5 year's warranty or any other warranty period specified in the contract for the product from the date of purchase
- Invoice or shipment bill is required to claim the warranty
- The warranty policy only requires manufacturer to repair the defective product or send substitute for replacement
- Installation labor, electricity cost and other related cost will not be covered by the manufacturer warranty policy
- Warranty doesn't cover the defect caused by inappropriate use, especially if directions of the instructions for use are not observed, normal abrasion as well as failures which affect the value or use of the product insignificantly.


COMMON TECHNICAL DATA

Color Temperature	3000K-5000K
Beam Angle	120° degrees
CRI	>80
Operation Temperature	-30°C to 40°C
Lumen Efficiency	More than 135 LPW
Input Voltage	100-277VAC/200-480V
Frequency	50/60Hz
Power Supply Efficiency	90%
Rated Life	50,000 hours
Power Factor	More than 0.99
LED Type	SMT 2835
Housing	Aluminum & Plastic

MODEL	WATTAGE	CCT	VOLTAGE
JVT	24 = 24W	3 = 3000K	LV = 120 - 277V
JVT	35 = 35W	4 = 4000K	HV = 200 - 480V
JVT	48 = 48W	5 = 5000K	

EXAMPLE: JVT-24-4-HV

MOUNTING OPTIONS

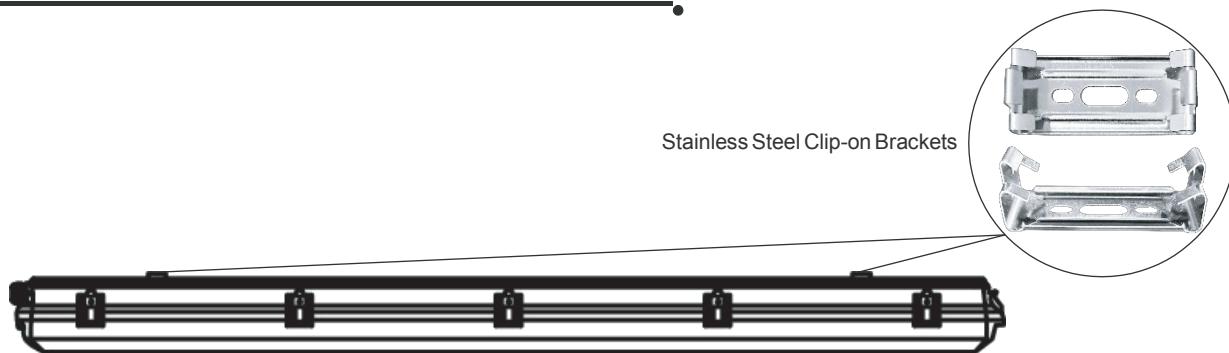

WIRING CONNECTION

