



Hazardous Location LED Luminaire

FME Mercury -Series



Product description

The Mercury-Series LED Luminaire can be used in locations made hazardous by the presence of flammable vapors or gases or combustible dusts as defined by the NEC. The Earth Series is rated for Class 1, Division 1; Class 1, Division 2; Class 2, Division 2; Class 3 applications. The copper free cast aluminum housing allows for cool operating temperatures.

Features

- High efficacy: up to 140lm/W
- Color temperature: 4000K, 5000K, 6000K
- Input Voltage 120-277V or 347-480V
- Suitable for -40°C to +45°C Ambient Temperature.
- L₇₀ Rating of 150,000 hours
- Variable optics 40° 60° 90° 120° for uniform illumination
- CRI>70
- Standard ceiling mount
- Copper free aluminum
- High vibration resistance
- Low maintenance costs
- Standard 2ft cable out of 3/4" threaded hub on top of fixture

Applications

- Coal & Dust Storage
- Petroleum Refineries
- Ethanol Facilities
- Chemical Plants
- Waste Water & Water Treatment Plants
- Power Generation Plants

Warranty

- 5-year limited warranty on the fixture. Complete warranty <http://www.fmelighting.com/warranty.html>

Note: Actual performance may differ as a result of end-user environment and application.

Compliance & Listing

- Class I, Division 1, Groups C & D
- Class I, Division 2, Groups A, B, C & D
- Class II, Division 2, Groups F & G
- Class III
- UL 844 Hazardous Locations
- UL 1598 Wet Locations
- UL 1598A Marine Outside
- UL 8750 LED Safety
- CSA C22.2 No. 250.0-08
- CSA C22.2 No. 137-M1981
- IP66
- DLC Listed
- CNEX
- ATEX


Product Dimensions

14.2'x14.2'x10.8'

Mounting Configuration and Accessories

Hazardous Location LED Luminaire

Ceiling Mounted Bracket

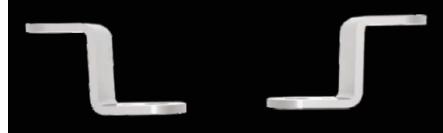

Side View

Top View

Ceiling mounted bracket comes standard with the Moon, Star, Venus, Space, Mercury and Mars Series.*

25° Stanchion



90° Stanchion



Stanchion mount can be used with the Moon, Star, Venus, Space, Mercury and Mars Series.

Explosion Proof Junction Box



** EX-JBOX can be used with the Moon, Star, Venus, Space, Mercury and Mars Series.**

Conduit 47(in)



25° Wall Mount




25 wall mount can be used with the Moon, Star, Venus, Space, Mercury and Mars Series.

90° Wall Mount




90 wall mount can be used with the Moon, Star, Venus, Space, Mercury and Mars Series.

Mounting method

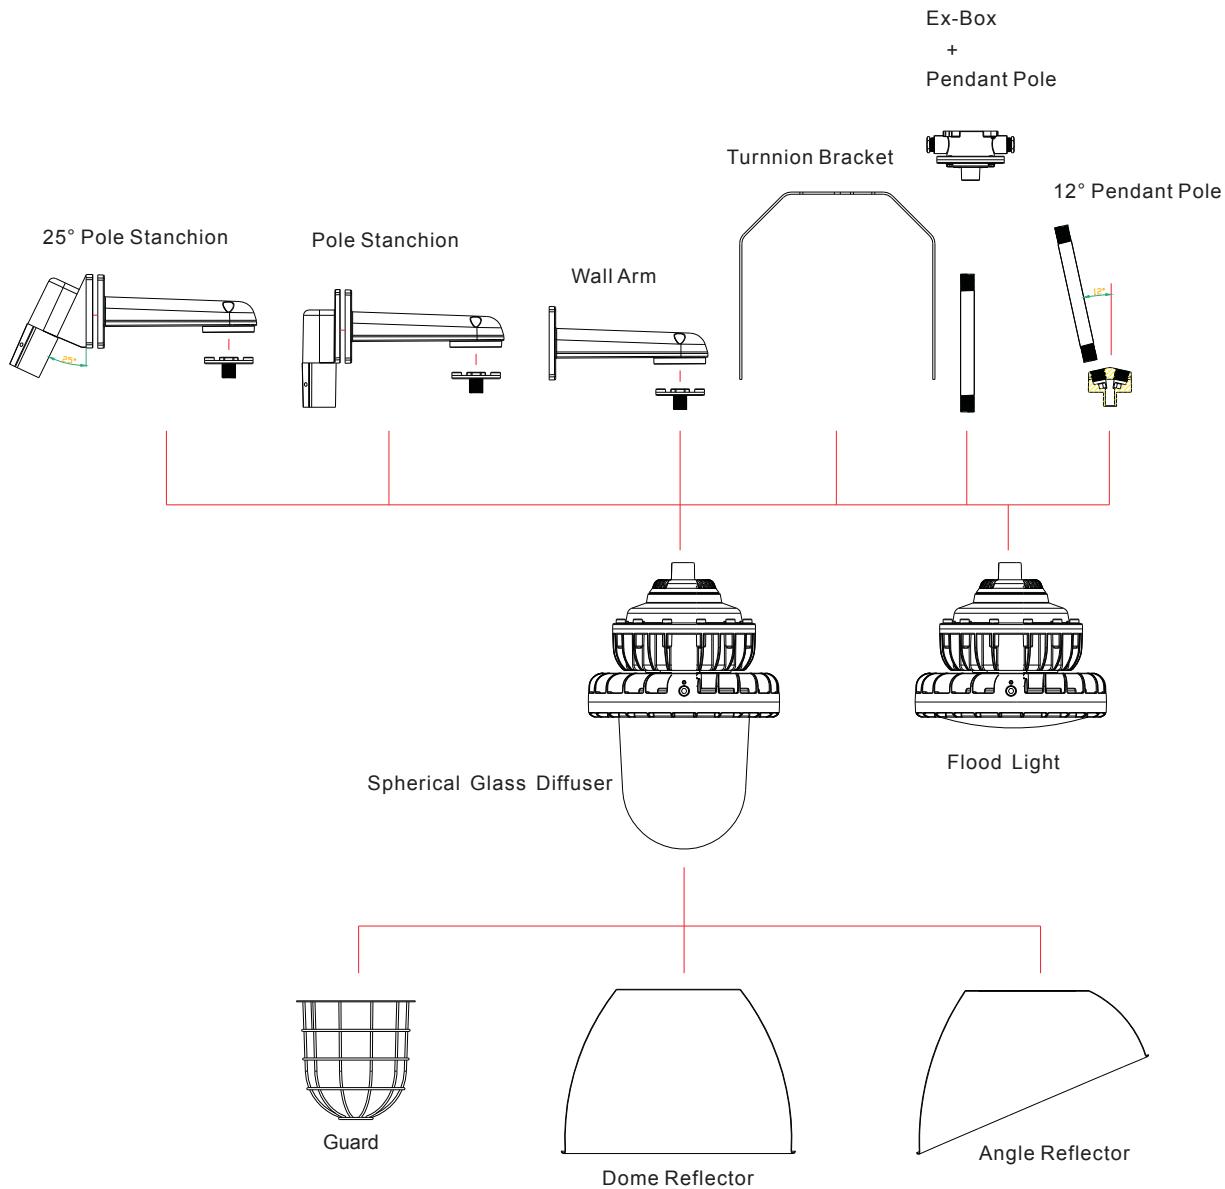


Photometric Data

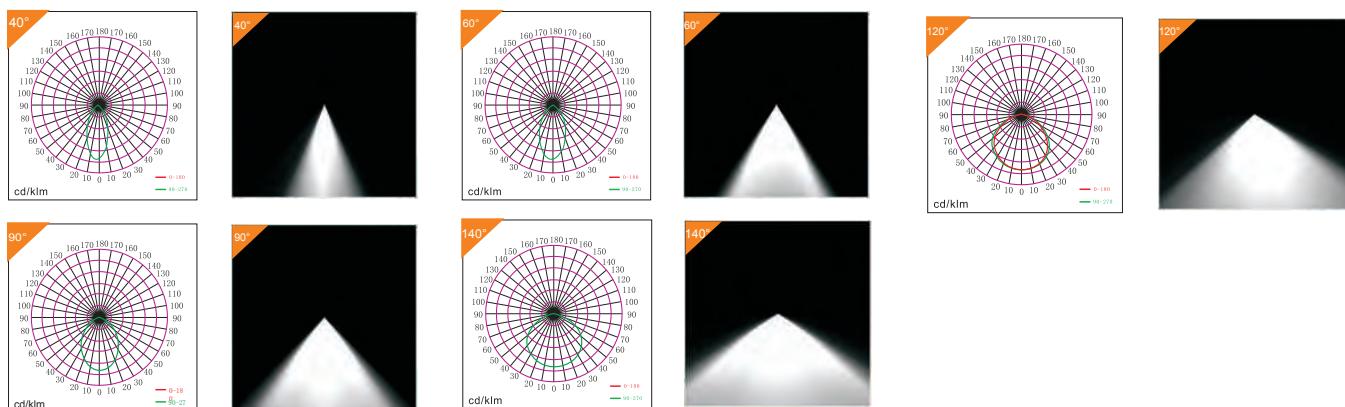

Technical Parameter

| Item No. | FME-MER-4 | FME-MER-6 | FME-MER-8 | FME-MER-10 | FME-MER-12 | FME-MER-15 | FME-MER-200 |
|-----------------|--|-----------|-----------|------------|------------|------------|-------------|
| Power | 40W | 60W | 80W | 100W | 120W | 150W | 200W |
| Input Voltage | 120-277V OR 347-480V | | | | | | |
| Lumen | 5,600 | 8,400 | 11,200 | 14,000 | 16,800 | 20,250 | 25,000 |
| Light Efficency | 140lm/W | | | | | | |
| CCT | 4000K / 5000K | | | | | | |
| CRI | >70 | | | | | | |
| IP | IP66 | | | | | | |
| Certification | ETL listed, UL844, UL 1598, UL 1598A, CSA standard, ABS, ATEX, IECEEx certified, IP 66 | | | | | | |

Ordering Information and Mounting Accessories

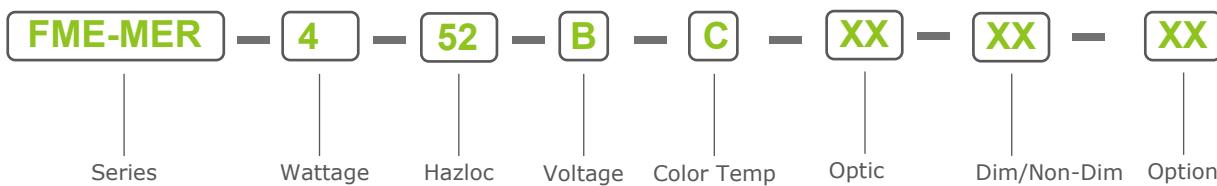

| <u>SERIES</u> | <u>WATTAGE</u> | <u>HAZLOC</u> | <u>VOLTAGE</u> | <u>COLOR TEMP</u> | <u>OPTIC</u> | <u>DIM/NON-DIM</u> | <u>OPTION</u> |
|---------------|---|--|------------------------------|----------------------------------|--|-------------------------------|--|
| FME-MER | 4=40W 6=60W 8=80W 10=100W 15=150W 18=180W 20=200W | 42=CIDI 52=CIDII 62=CIIDI 72=CIII | A=AC100-277V B=AC277-480V | S= 4000K I= 5000K C= 6000K | M=40° N= 60° O= 90° P= 100° Q= 110° R= 120° | D=Dimmable ND=Non-Dimmable | OPDPS=250 Stanchion OPPS=90° Stanchion OPWA=250 Wall Mount OPCB=90° Wall Mount OPPP=Pendant Mount OPDPP=120 Pendant OPEB=Junction Box OPC= 47(in) Conduit |

Class I locations are those in which inflammable gases or vapors are or may be present in sufficient quantities to produce explosive or flammable mixtures.

CLASS I, DIVISION 1

Class I, Division 1 locations are where hazardous atmosphere may be present during normal operations. It may be present continuously, intermittently, periodically or during normal repair or maintenance operations, or those areas where a breakdown in processing equipment releases hazardous vapors with the simultaneous failure of electrical equipment.

CLASS I, DIVISION 2

Class I, Division 2 locations are those in which volatile flammable liquids or gases are handled, processed or used. Normally they will be confined within closed containers or in closed systems from which they can escape only in the case of rupture or deterioration of the containers or systems.

Class II Locations

Class II locations are those that are hazardous because of the presence of combustible dust.

CLASS II, DIVISION 1

Class II, Division 1 locations include areas where combustible dust may be in suspension in the air under normal conditions in sufficient quantities to produce explosive or ignitable mixtures (Dust may be emitted into the air continuously, intermittently or periodically), or where failure or malfunction of equipment might cause a hazardous location to exist and provide an ignition source with the simultaneous failure of electrical equipment, included also are locations in which combustible dust of an electrically conductive nature may be present.

CLASS II, DIVISION 2

Class II, Division 2 locations are those in which combustible dust will not normally be in suspension nor will normal operations put dust in suspension, but where accumulation of dust may interfere with heat dissipation from electrical equipment or where accumulations near electrical equipment may be ignited.

Class III Locations

Class III locations are those considered hazardous due to the presence of easily ignitable fibers or flyings, which are in quantities sufficient to produce ignitable mixtures.

CLASS III, DIVISION 1

Locations in which easily ignitable fibers or materials producing combustible flyings are handled, manufactured or used.

CLASS III, DIVISION 2

Locations where easily ignitable fibers are stored or handled.