


Remote Heads Incandescent



Project:	
Type:	
Catalog #:	

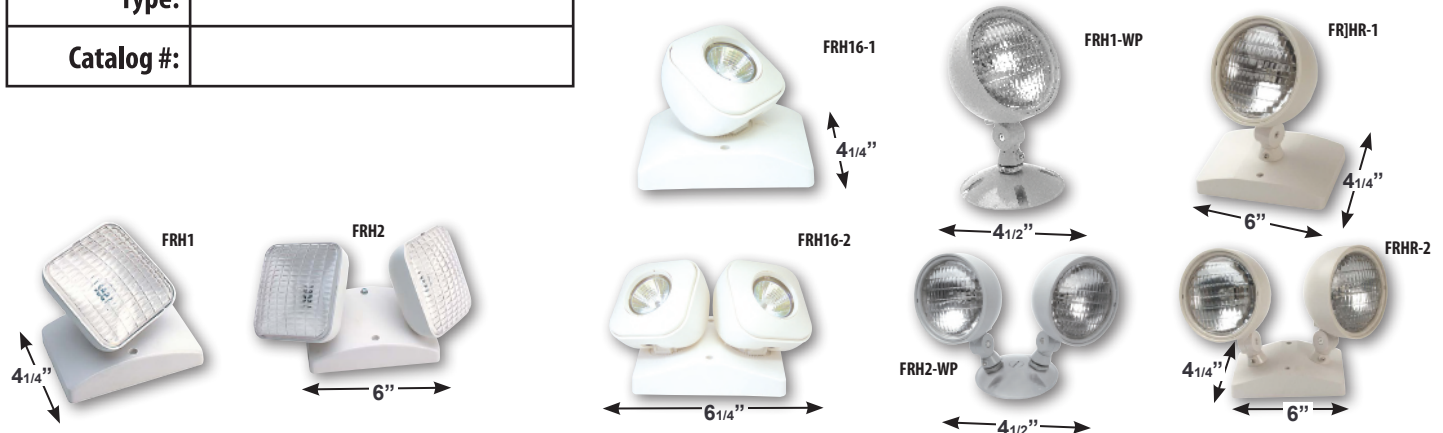

ORDERING INFORMATION

Model #	# of Heads	Voltage	Wattage	Application	Color
FRH16-1-6V5W	1	6 Volt	5 Watt	Indoor	White
FRH16-2-6V5W	2	6 Volt	5 Watt	Indoor	White
FRH16-1B-6V5W	1	6 Volt	5 Watt	Indoor	Black
FRH16-2B-6V5W	2	6 Volt	5 Watt	Indoor	Black

Other voltage and wattage options available. Please contact customer service.

Model #	# of Heads	Voltage	Wattage	Application	Color
FRHR-1-6V5.4W	1	6 Volt	5.4 Watt	Indoor	White
FRHR-1-6V9W	1	6 Volt	9 Watt	Indoor	White
FRHR-2-6V5.4W	2	6 Volt	5.4 Watt	Indoor	White
FRHR-2-6V9W	2	6 Volt	9 Watt	Indoor	White
FRHR-1-12V7W	1	12 Volt	7.2 Watt	Indoor	White
FRHR-1-12V12W	1	12 Volt	12 Watt	Indoor	White
FRHR-2-12V7W	2	12 Volt	7.2 Watt	Indoor	White
FRHR-2-12V12W	2	12 Volt	12 Watt	Indoor	White
FRHR-1B-6V5.4W	1	6 Volt	5.4 Watt	Indoor	Black
FRHR-2B-6V5.4W	2	6 Volt	5.4 Watt	Indoor	Black

Other voltage and wattage options available. Please contact customer service.

Model #	# of Heads	Voltage	Wattage	Application	Color
FRH1-6V5.4W	1	6 Volt	5.4 Watt	Indoor	White
FRH1-6V9W	1	6 Volt	9 Watt	Indoor	White
FRH2-6V5.4W	2	6 Volt	5.4 Watt	Indoor	White
FRH2-6V9W	2	6 Volt	9 Watt	Indoor	White
FRH1-12V7W	1	12 Volt	7.2 Watt	Indoor	White
FRH1-12V12W	1	12 Volt	12 Watt	Indoor	White
FRH2-12V7W	2	12 Volt	7.2 Watt	Indoor	White
FRH2-12V12W	2	12 Volt	12 Watt	Indoor	White
FRH1-WP-6V7.2W	1	6 Volt	7.2 Watt	Outdoor	Gray
FRH2-WP-6V7.2W	2	6 Volt	7.2 Watt	Outdoor	Gray
FRH1B-6V5.4W	1	6 Volt	5.4 Watt	Indoor	Black
FRH2B-6V5.4W	2	6 Volt	5.4 Watt	Indoor	Black

Other voltage and wattage options available. Please contact customer service.

ILLUMINATION

- Smooth thermoplastic or chrome plated metalized reflector with lens for optimal light distribution.
- Available with MR-16 halogen or wedge base incandescent lamps.

ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting base plate included with mounting hardware.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

HOUSING

- Indoor application remote heads are injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Outdoor application remote heads are injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in gray or black finish.


WARRANTY

- Five year warranty on electronics and housing.

Remote Heads LED

Project:	
Type:	
Catalog #:	

FRHLED2

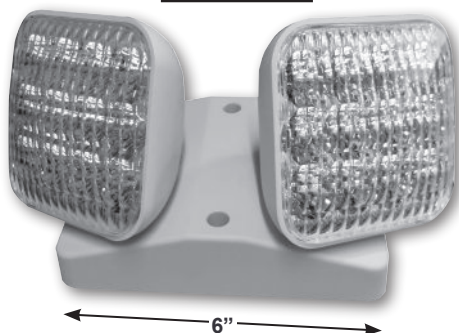

FRHLED1



FRHLED2-WP



FRHLED1-WP



ILLUMINATION

- Long lasting, efficient ultra-bright white LED lamp heads.
- High-performance chrome-plated metalized reflector and plastic lens (indoor applications) or glass lens (outdoor applications) for optimal light distribution.
- Adjustable LED lamp heads increases center-to-center spacing with 8 LEDs in each lamp head.

ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting base mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

HOUSING

- Indoor application remote heads are injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Outdoor application remote heads are die-cast aluminum, Sealed and gasketed in gray or black finish.

WARRANTY/LISTING

- Five year warranty on electronics and housing.
- UL listed with approved Best Lighting Products.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

ORDERING INFORMATION

Model #	# of Heads	Voltage	Wattage	Application	Approved for
FRHLED1-R1	1	3.6 Volt	1	Indoor	LED5-HO
FRHLED1SDT-R1	1	3.6 Volt	1	Indoor	LED5-HO
FRHLED2-R1	2	3.6 Volt	2	Indoor	LED5-HO
FRHLED2-SDT-R1	2	3.6 Volt	2	Indoor	LED5-HO
FRHLED1-WP-R1	1	3.6 Volt	1	Outdoor	LED5-HO
FRHLED1-SDT-WP-	1	3.6 Volt	1	Outdoor	LED5-HO
FR1 RHLED2-WP-R1	2	3.6 Volt	2	Outdoor	LED5-HO
FRHLED2-SDT-WP-R1	2	3.6 Volt	2	Outdoor	LED5-HO

Model #	# of Heads	Voltage	Wattage	Application	Approved for
FRHLED1-CLPCXTE	1	9.6 Volt	1	Indoor	CLPU, LEDCXTE
FRHLED1SDT-CLPCXTE	1	9.6 Volt	1	Indoor	CLPU, LEDCXTE
FRHLED2-CLPCXTE	2	9.6 Volt	2	Indoor	CLPU, LEDCXTE
FRHLED2-SDT-CLPCXTE	2	9.6 Volt	2	Indoor	CLPU, LEDCXTE
FRHLED1-WP-CLPCXTE	1	9.6 Volt	1	Outdoor	CLPU, LEDCXTE, LEDTFX-2
FRHLED1-SDT-WP-CLPCXTE	1	9.6 Volt	1	Outdoor	CLPU, LEDCXTE, LEDTFX-2
FRHLED2-WP-CLPCXTE	2	9.6 Volt	2	Outdoor	CLPU, LEDCXTE, LEDTFX-2
FRHLED2-SDT-WP-CLPCXTE	2	9.6 Volt	2	Outdoor	CLPU, LEDCXTE, LEDTFX-2