

Project:	
Type:	
Catalog #:	

The SLXT standard self-luminous versions are internally illuminated by maintenance free sealed tritium filled tubes. Tritium source illumination provides constant emergency illumination as specified for either ten (10) or twenty (20) years. Minimum brightness at the time of manufacture of 0.15 foot lamberts.

The SLXT series housing is constructed from durable, corrosion resistant ABS thermoplastic. The SLXT housing is supplied standard with a red on white stencil and white frame (other color options available). Single or double face versions must be specified. Removable field adjustable universal chevrons are standard on each unit.

The SLXT series is a completely self-powered, illuminated exit sign requiring no external power source of any kind. The SLXT series self-luminous sign is extremely reliable during its predicted life. The SLXT series exit sign is always "ON" requiring no wiring or electrical installation, and as a practical and environmental matter, consumes no power of any kind. Operating temperature is between -76°F to +212°F.


The SLXT series is manufactured under stringent quality control procedures and meet all requirements of the Atomic Energy Control Board (AECB) and the Federal Nuclear Regulatory Commission. Illumination is achieved by using a permanent internal light source. The sign complies with ISO 9001. Tritium emits relatively low energy beta particles that bombard the phosphorus coated glass tubes, this action generates light. Light emitting phosphors are designed and selected according to their color and light production efficiency. The SLXT series features several glass envelopes (tubes) that are encased behind plastic housing light diffusers. To reduce chances of breakage, the SLXT series features tritium tube shockproof mountings made of PVC. At the end of life, SLXT signs must be responsibly disposed or recycled.

SLXT series also complies with the following: NFPA 101, UL 924, City of Los Angeles, State of California, Council of American Building Officials (ICBO, SBCCI), OSHA and USNRC.

The SLXT series uses self-luminous tritium as a light source. Although this source emits light, it cannot be considered or measured in the same sense as incandescent (point) sources, where light is emitted evenly from an area rather than a point surface. The conventional unit of measurement is the microlambert. For convenience, the following definitions are provided:

A lambert equals 1/p candela per square centimeter (0.3183 cd/cm²) or 104/p cd/m². A foot Lambert equals 1/p candela per square foot, or 3.426 candelas per square meter. A microlambert is one millionth of a lambert.

The SLXT series has been designed to perform in just about any environment. Requiring no external power source, installation is effortless and efficient. The practical design of the SLXT series allows installation and maintenance to be at a minimum. Since an external power source is not required, the installation of the SLXT series is not restricted by location or the lack of an easily accessible power source.

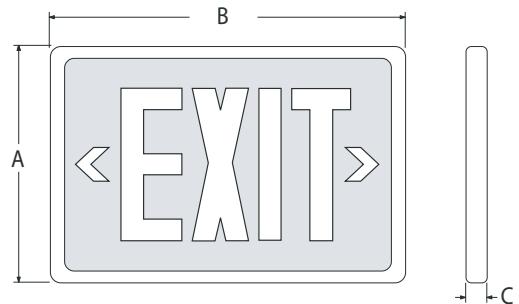

SLXT Series	A	B	C
Single Face	215.9mm 8 1/2"	355.6mm 14"	25.4mm 1"
Double Face	215.9mm 8 1/2"	355.6mm 14"	57.15mm 2 1/4"

The SLXT series requires that the manufacturer register the actual installation location of every self-luminous tritium exit sold. When ordering the TSL series, Beghelli USA will require all purchase orders to include the end users address, phone number and contact name.

The SLXT offers full custom signage and graphics. We will work with your design or requirements. Contact factory for more information.

The SLXT Series comes with a 10 or 20 year factory warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.

Series	Face No.	Face plate	Duration	Frame	Mounting	Options
SLXT	1 (single)	R (red)	10 (ten years)	B (black)	U (universal)	SW (special wording)
	2 (double)	G (green)	20 (twenty years)	GRY (grey)	SPK_12 (12" swivel pendant)	
		B (black)		W (white)	SPK_24 (24" swivel pendant)	
					SPK_36 (36" swivel pendant)	
					SPK_48 (48" swivel pendant)	