


VIGILANT-1 SERIES WALL MOUNT FIXTURE

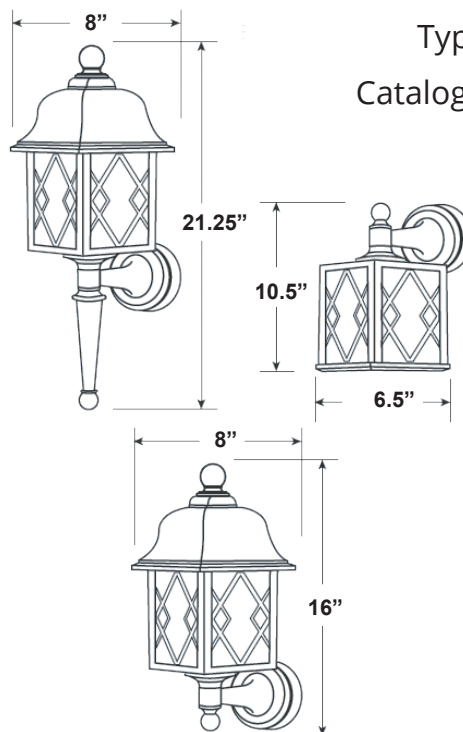

Project: _____

Type: _____

Catalog#: _____

HOUSING

- Durable non-corrosive UV resistant resin
- Wall Mount

ELECTRICAL

- 120VAC
- Operating Temperature: -40°C(-40°F) - 40°C (104°F)

OPTICAL SYSTEM

- Clear acrylic diffuser
- 50,000 Hours @ L₇₀
- CRI > 80

CODE COMPLIANCE

- cULus Listed for Wet Locations
- RoHS Compliant
- Energy Star Qualified
- Made in USA

WARRANTY

- 5 Year

ORDERING INFORMATION

CATALOG #	Wattage	Lumens	Color
FPTW8-1-G-13L-120V-30K-*	13W LED	900 Lumens	3000K
FPTW8-1-G-13L-120V-40K-*	13W LED	1100 Lumens	4000K
FPTW8-1-G-60W-120V-*		60W Medium Base	
FPTW8-1-G-13W-120V-*		13W GU24 Base	
FFPTW8-1-G-18W-120V-*		18W GU24 Base	
FPTW8-1-G-23W-120V-*		23W GU24 Base	
FPTW8-2-G-13L-120V-30K-*	13W LED	900 Lumens	3000K
FPTW8-2-G-13L-120V-40K-*	13W LED	1100 Lumens	4000K
FPTW8-2-G-60W-120V-*		60W Medium Base	
FPTW8-2-G-13W-120V-*		13W GU24 Base	
FPTW8-2-G-18W-120V-*		18W GU24 Base	
FPTW8-2-G-23W-120V-*		23W GU24 Base	
FPTW8-3-G-13L-120V-30K-*	13W LED	900 Lumens	3000K
FPTW8-3-G-13L-120V-40K-*	13W LED	1100 Lumens	4000K
FPTW8-3-G-60W-120V-*		60W Medium Base	
FPTW8-3-G-13W-120V-*		13W GU24 Base	
FPTW8-3-G-18W-120V-*		18W GU24 Base	
FPTW8-3-G-23W-120V-*		23W GU24 Base	

*Specify Housing: **BL**ack; **WH**ite

OPTIONS (Factory Installed)

PC	- Photocell
27K	- 2700K E26 LED Lamp (60W model only)
40K	- 4000K E26 LED Lamp (60W model only)

