



## PAINT SERIES

### For Spray Booths

- 6-Tube or 4-Tube Fixtures
- Energy Efficient
- Color Corrected T-8 Tubes
- Inside Accessible



PAINT SERIES fixtures were designed with T-8 color corrected tubes for excellent color-matching and illumination while being cost effective. For an exceptional spraying environment, choose from our 6-tube or 4-tube wall or corner fixtures.

### 6-Tube & 4-Tube Features



6-Tube Fixture

- Energy-Efficient T-8, 32 watt electronic ballasts
- Dual voltage 120/277 volt, 50/60 Hz or Single voltage 347 volt, 60 Hz
- ETL & ETL-C Listed
- Class 1, Division 2, Groups A,B,C,D
- Interlock safety switch
- Enclosed & gasketed
- Twist-In lamp holders
- Inside access
- Allows easy retrofits
- Template for installation into existing panels
- Corner enclosure (optional)




Corner Fixture

### Part Numbers:

6-Tube Fixture: PAINT12-6  
4-Tube Fixture: PAINT12-4

6-Tube Corner Fixture: LAC12-6  
4-Tube Corner Fixture: LAC12-4

### Dimensions

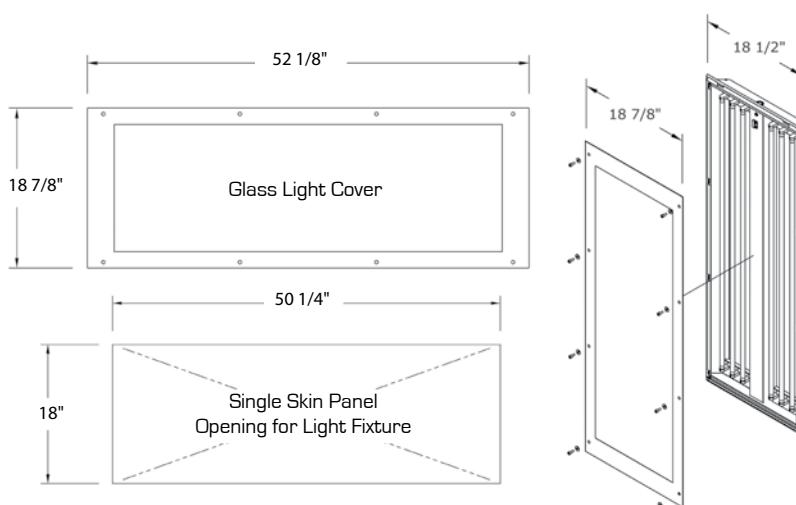


### Dual Voltage Lighting Ballasts

6-Tube	4-Tube
ICN-3P32-SC-HAZ	ICN-4P32-SC-HAZ
120V/1.42A	120V/0.94A
277V/0.62A	277V/0.41A
50/60 Hz	50/60 Hz
6 x 32W = 192W	4 x 32W = 128W
Total	Total

### Single Voltage Lighting Ballasts

6-Tube	4-Tube
347 volt	347 volt
GEL-3P32	GEL-4P32
2 x 3 Tube	4 Tube
0.52A	0.31A
60 Hz	60 Hz
6 x 32W = 192W	4 x 32W = 128W
Total	Total

### Interlocking Safety Switch

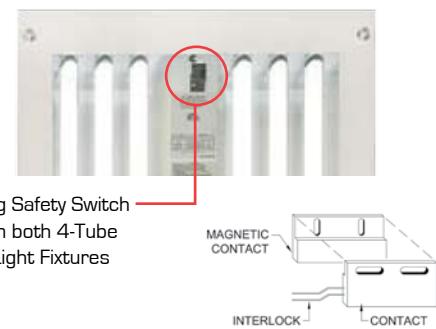

### Wiring

